




## 金属化聚丙烯膜电容器 Metallized polypropylene film capacitor (Box-type)

### ■ 外形图 Outline Drawing

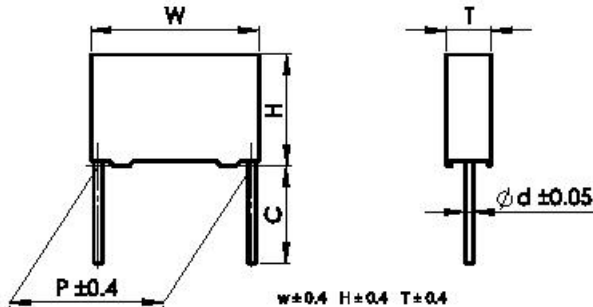

### ■ 特点

- 高频损耗小
- 内部温升小, 耐高温
- 塑料外壳 (UL94 V-0), 阻燃环氧填充

### ■ 主要用途

- 高压、大电流的脉冲电路
- 电子照明 (如电子镇流器、E-HID)
- 高频交流负荷

### ■ 技术要求 Specifications

### ■ Features

- Low loss at high frequency
- Small inherent temperature rise, high temperature rage
- Plastic case (UL94 V-0), epoxy resin sealing

### ■ Typical application

- Pulse applications with high A.C. voltage and high current
- Electric lighting (i.e. electric ballast, E-HID)
- High-frequency A.C. loads

引用标准 Reference Standard	GB/T 14579(IEC 60384-17)				
气候类别 Climatic Category	55/125/56				
额定温度 Rated Temperature	105℃				
工作温度范围 Operating Temperature Range	-55℃ ~125℃ (+105℃ to +125℃: decreasing factor 1.25% per ℃ for $U_R$ )				
电容量范围 Capacitance Range	0.00047μF ~ 0.15μF				
电容量偏差 Capacitance Tolerance	±3% (H), ±5% (J), ±10% (K)				
耐电压 Voltage Proof	1.6 $U_R$ (5s)				
损耗角正切 Dissipation Factor	≤ 10 × 10 <sup>-4</sup> (1kHz, 20℃)				
绝缘电阻 Insulation Resistance	≥ 100 000MΩ (20℃, 100V, 1min)				
最大脉冲爬升速率 Maximum Pulse Rise Time(dV/dt): 若实际工作电压 U 比额定电压 $U_R$ 低, 电容器可工作在更高的 dV/dt 场合, 这样 dV/dt 允许值应为右表值乘以 $U_R/U$ 。 If the working voltage(U) is lower than the rated voltage( $U_R$ ), the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with $U_R/U$ .	$U_R$ (Vac)	dV/dt (V/μs)			
			P=7.5	P=10.0	P=15.0
	400	3 000	2 200	2 000	800
	500	4 000	3 000	2 500	1 200
	600	6 500	6 000	4 500	1 800
	700	—	9 800	9 500	4 500
900	—	—	10 000	6 000	

$U_R$	400Vac		500Vac		600Vac		700Vac		900Vac
P (mm)	7.5	> 7.5	7.5	> 7.5	≤ 10.0	> 10.0	10.0	> 10.0	—
Vdc(V)	1 000	1 300	1 300	1 400	1 400	1 600	1 600	2 000	2 500

产品编码说明 Part number system

■ 18位产品代码如下:

The 18 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	3	3															

第1~3位	型号代码	Digit 1 to 3	Series code
	C33=MKP23		C33=MKP23
第4~5位	交流额定电压	Digit 4 to 5	AC rated voltage
	G2=400V H2=500V U1=600V		G2=400V H2=500V U1=600V
	V1=700V X1=900V		V1=700V X1=900V
第6~8位	标称容量	Digit 6 to 8	Rated capacitance value
	举例: 103=10 × 10 <sup>3</sup> pF=0.01μF		For example: 103=10 × 10 <sup>3</sup> pF=0.01μF
第9位	容量偏差	Digit 9	Capacitance tolerance
	H=±3% J=±5% K=±10%		H=±3% J=±5% K=±10%
第10位	引线脚距P	Digit 10	Pitch
	3=7.5mm 4=10.0mm		3=7.5mm 4=10.0mm
	6=15.0mm 9=22.5mm		6=15.0mm 9=22.5mm
第11位	内部特征码	Digit 11	Internal use
第12~15位	引线加工和包装代码	Digit 12 to 15	Lead form and packaging code
第16~18位	内部特征码	Digit 16 to 18	Internal use

■ Table 1 引线加工和包装代码 lead form and packaging code

第12位 Digit 12		第13位 Digit 13		第14位 Digit 14		第15位 Digit 15	
代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation
A	弹带包装 ammo-pack	3	F=7.5mm	0	表示直脚 straight	1	产品在连续的两个弹带孔之间 each cap. among two consecutive holes P3=12.7mm,H=18.5mm (For pitch=7.5mm)
		4	F=10.0mm				
		8	F=15.0mm				
C	直脚 straight lead "C" in the figure above	代码 Code	说明 explanation	0		0	引线长度公差 ±0.5mm 或标准长度 Length tolerance ±0.5mm Or standard length
		00	标准的引线长度 (18mm-25mm) standard lead length				
		45	引线长度 4.5mm lead length 4.5mm				



**C33**  
MKP23 series

■ 外形尺寸 Dimensions (mm)

400Vac						
C <sub>N</sub> (μF)	W	H	T	P	d	Part number
0.00082	10.5	8.0	4.0	7.5	0.6	C33G2221-30****+++
0.0010	10.5	8.0	4.0	7.5	0.6	C33G2102-30****+++
0.0012	10.5	8.0	4.0	7.5	0.6	C33G2122-30****+++
0.0015	10.5	9.0	4.0	7.5	0.6	C33G2152-30****+++
0.0018	10.5	8.0	4.0	7.5	0.6	C33G2182-30****+++
0.0022	10.5	8.0	4.0	7.5	0.6	C33G2222-30****+++
0.0027	10.5	8.0	4.0	7.5	0.6	C33G2272-30****+++
0.0033	10.5	9.0	4.0	7.5	0.6	C33G2332-30****+++
0.0038	10.5	8.0	4.0	7.5	0.6	C33G2382-30****+++
0.0038	10.5	8.0	4.0	7.5	0.6	C33G2382-30****+++
0.0047	10.5	9.0	4.0	7.5	0.6	C33G2472-30****+++
0.0056	10.5	11.0	6.0	7.5	0.6	C33G2562-30****+++
0.0068	10.5	11.0	6.0	7.5	0.6	C33G2682-30****+++
0.0082	10.5	11.0	5.0	7.5	0.6	C33G2822-30****+++
0.010	10.5	12.0	8.0	7.5	0.6	C33G2103-30****+++
0.012	10.5	12.0	8.0	7.5	0.6	C33G2123-30****+++
0.0010	13.0	9.0	4.0	10.0	0.6	C33G2102-40****+++
0.0012	13.0	9.0	4.0	10.0	0.6	C33G2122-40****+++
0.0015	13.0	9.0	4.0	10.0	0.6	C33G2152-40****+++
0.0018	13.0	9.0	4.0	10.0	0.6	C33G2182-40****+++
0.0022	13.0	9.0	4.0	10.0	0.6	C33G2222-40****+++
0.0027	13.0	9.0	4.0	10.0	0.6	C33G2172-40****+++
0.0033	13.0	9.0	4.0	10.0	0.6	C33G2332-40****+++
0.0038	13.0	9.0	4.0	10.0	0.6	C33G2382-40****+++
0.0047	13.0	11.0	5.0	10.0	0.6	C33G2472-40****+++
0.0056	13.0	11.0	5.0	10.0	0.6	C33G2562-40****+++
0.0068	13.0	11.0	6.0	10.0	0.6	C33G2682-40****+++
0.0082	13.0	12.0	8.0	10.0	0.6	C33G2822-40****+++
0.010	13.0	12.0	8.0	10.0	0.6	C33G2103-40****+++

400Vac						
C <sub>N</sub> (μF)	W	H	T	P	d	Part number
0.0022	17.5	11.0	5.0	16.0	0.8	C33G2222-80****+++
0.0027	17.5	11.0	5.0	16.0	0.8	C33G2272-80****+++
0.0033	17.5	11.0	5.0	15.0	0.8	C33G2332-80****+++
0.0038	17.5	11.0	5.0	15.0	0.8	C33G2382-80****+++
0.0047	17.5	11.0	5.0	16.0	0.8	C33G2472-80****+++
0.0056	17.5	11.0	5.0	15.0	0.8	C33G2562-80****+++
0.0068	17.5	11.0	5.0	15.0	0.8	C33G2682-80****+++
0.0082	17.5	11.0	5.0	16.0	0.8	C33G2822-80****+++
0.010	17.5	11.0	5.0	16.0	0.8	C33G2103-80****+++
0.012	17.5	11.0	5.0	15.0	0.8	C33G2123-80****+++
0.015	17.5	12.0	8.0	15.0	0.8	C33G2153-80****+++
0.018	17.5	12.0	6.0	16.0	0.8	C33G2183-80****+++
0.022	17.5	13.5	7.5	16.0	0.8	C33G2223-80****+++
0.027	17.5	13.5	7.5	15.0	0.8	C33G2273-80****+++
0.033	17.5	14.5	8.5	15.0	0.8	C33G2333-80****+++
0.038	17.5	16.0	10.0	16.0	0.8	C33G2383-80****+++
0.047	17.5	18.0	10.0	16.0	0.8	C33G2473-80****+++
0.056	17.5	19.0	11.0	15.0	0.8	C33G2563-80****+++
0.068	17.5	19.0	11.0	16.0	0.8	C33G2683-80****+++
0.018	26.5	15.0	6.0	22.5	0.8	C33G2183-90****+++
0.022	26.5	15.0	6.0	22.5	0.8	C33G2223-90****+++
0.027	26.5	15.0	8.0	22.5	0.6	C33G2273-90****+++
0.033	26.5	15.0	6.0	22.5	0.8	C33G2333-90****+++
0.038	26.5	15.0	6.0	22.5	0.8	C33G2383-90****+++
0.047	26.5	18.0	7.0	22.5	0.8	C33G2473-90****+++
0.056	26.5	18.0	7.0	22.5	0.8	C33G2563-90****+++
0.068	26.5	17.0	8.5	22.5	0.8	C33G2683-90****+++
0.082	26.5	17.0	8.5	22.5	0.8	C33G2823-90****+++
0.10	26.5	18.5	10.0	22.5	0.8	C33G2104-90****+++
0.12	26.5	22.0	12.0	22.5	0.8	C33G2124-90****+++
0.15	26.5	22.0	12.0	22.5	0.8	C33G2154-90****+++

备注: 1. “-”表示容量偏差。 “-”=capacitance tolerance code, K=±10%, J=±5.0%, H=±3.0%  
2. “\*\*\*\*”表示引线加工和包装代码(见表1)。“\*\*\*\*”=lead form and packing code (refer to table 1)



■ 外形尺寸 Dimensions (mm)

500Vac						
C <sub>N</sub> (μF)	W	H	T	P	d	Part number
0.00056	10.5	8.0	4.0	7.5	0.6	C33H2581-3S****++
0.00082	10.5	8.0	4.0	7.5	0.6	C33H2621-3S****++
0.00088	10.5	8.0	4.0	7.5	0.6	C33H2681-3S****++
0.00082	10.5	8.0	4.0	7.5	0.6	C33H2821-3S****++
0.0010	10.5	8.0	4.0	7.5	0.6	C33H2102-3S****++
0.0012	10.5	8.0	4.0	7.5	0.6	C33H2122-3S****++
0.0016	10.5	8.0	4.0	7.5	0.6	C33H2152-3S****++
0.0018	10.5	8.0	4.0	7.5	0.6	C33H2182-3S****++
0.0022	10.5	11.0	6.0	7.5	0.6	C33H2222-3S****++
0.0027	10.5	11.0	6.0	7.5	0.6	C33H2272-3S****++
0.0033	10.5	11.0	6.0	7.5	0.6	C33H2332-3S****++
0.0036	10.5	12.0	6.0	7.5	0.6	C33H2362-3S****++
0.0038	10.5	12.0	6.0	7.5	0.6	C33H2392-3S****++
0.0047	10.5	12.0	6.0	7.5	0.6	C33H2472-3S****++
0.0056	10.5	12.0	6.0	7.5	0.6	C33H2562-3S****++
0.0010	13.0	9.0	4.0	10.0	0.6	C33H2102-4S****++
0.0012	13.0	9.0	4.0	10.0	0.6	C33H2122-4S****++
0.0016	13.0	9.0	4.0	10.0	0.6	C33H2152-4S****++
0.0018	13.0	9.0	4.0	10.0	0.6	C33H2182-4S****++
0.0022	13.0	9.0	4.0	10.0	0.6	C33H2222-4S****++
0.0027	13.0	9.0	4.0	10.0	0.6	C33H2272-4S****++
0.0030	13.0	9.0	4.0	10.0	0.6	C33H2302-4S****++
0.0033	13.0	9.0	4.0	10.0	0.6	C33H2332-4S****++
0.0038	13.0	11.0	5.0	10.0	0.6	C33H2392-4S****++
0.0047	13.0	11.0	5.0	10.0	0.6	C33H2472-4S****++
0.0056	13.0	11.0	5.0	10.0	0.6	C33H2562-4S****++
0.0068	13.0	12.0	6.0	10.0	0.6	C33H2682-4S****++
0.0082	13.0	12.0	6.0	10.0	0.6	C33H2822-4S****++
0.010	13.0	13.0	7.0	10.0	0.6	C33H2103-4S****++
0.012	13.0	14.0	8.0	10.0	0.6	C33H2123-4S****++

500Vac						
C <sub>N</sub> (μF)	W	H	T	P	d	Part number
0.0033	17.5	11.0	5.0	15.0	0.8	C33H2332-6S****++
0.0036	17.5	11.0	5.0	15.0	0.8	C33H2362-6S****++
0.0038	17.5	11.0	5.0	15.0	0.8	C33H2392-6S****++
0.0047	17.5	11.0	5.0	15.0	0.8	C33H2472-6S****++
0.0056	17.5	11.0	5.0	15.0	0.8	C33H2562-6S****++
0.0068	17.5	11.0	5.0	15.0	0.8	C33H2682-6S****++
0.0082	17.5	11.0	5.0	15.0	0.8	C33H2822-6S****++
0.010	17.5	11.0	5.0	15.0	0.8	C33H2103-6S****++
0.012	17.5	12.0	6.0	15.0	0.8	C33H2123-6S****++
0.016	17.5	12.0	6.0	15.0	0.8	C33H2153-6S****++
0.018	17.5	13.5	7.5	15.0	0.8	C33H2183-6S****++
0.022	17.5	13.5	7.5	15.0	0.8	C33H2223-6S****++
0.027	17.5	13.5	7.5	15.0	0.8	C33H2273-6S****++
0.030	17.5	14.5	8.5	15.0	0.8	C33H2303-6S****++
0.033	17.5	16.0	10.0	15.0	0.8	C33H2333-6S****++
0.036	17.5	16.0	10.0	15.0	0.8	C33H2363-6S****++
0.038	17.5	16.0	10.0	15.0	0.8	C33H2393-6S****++
0.047	17.5	18.0	11.0	15.0	0.8	C33H2473-6S****++
0.056	17.5	18.0	11.0	15.0	0.8	C33H2563-6S****++
0.010	26.5	15.0	6.0	22.5	0.8	C33H2103-9S****++
0.012	26.5	15.0	6.0	22.5	0.8	C33H2123-9S****++
0.016	26.5	15.0	6.0	22.5	0.8	C33H2153-9S****++
0.018	26.5	15.0	6.0	22.5	0.8	C33H2183-9S****++
0.022	26.5	15.0	6.0	22.5	0.8	C33H2223-9S****++
0.027	26.5	15.0	6.0	22.5	0.8	C33H2273-9S****++
0.033	26.5	18.0	7.0	22.5	0.8	C33H2333-9S****++
0.036	26.5	18.0	7.0	22.5	0.8	C33H2363-9S****++
0.038	26.5	18.0	7.0	22.5	0.8	C33H2393-9S****++
0.047	26.5	17.0	6.5	22.5	0.8	C33H2473-9S****++
0.056	26.5	17.0	6.5	22.5	0.8	C33H2563-9S****++
0.068	26.5	18.5	10.0	22.5	0.8	C33H2683-9S****++
0.082	26.5	18.5	10.0	22.5	0.8	C33H2823-9S****++
0.10	26.5	22.0	12.0	22.5	0.8	C33H2104-9S****++
0.12	26.5	22.0	12.0	22.5	0.8	C33H2124-9S****++

备注: 1. “-”表示容量偏差。 “-”=capacitance tolerance code, K=±10%, J=±5.0%, H=±3.0%  
2. “\*\*\*\*”表示引线加工和包装代码(见表1)。“\*\*\*\*”=lead form and packing code (refer to table 1)



**C33**  
MKP23 series

■ 外形尺寸 Dimensions (mm)

600Vac						
C <sub>N</sub> (μF)	W	H	T	P	d	Part number
0.00047	10.5	8.0	4.0	7.5	0.6	C33U1471-30****++
0.00056	10.5	9.0	4.0	7.5	0.6	C33U1561-30****++
0.00062	10.5	8.0	4.0	7.5	0.6	C33U1621-30****++
0.00068	10.5	9.0	4.0	7.5	0.6	C33U1681-30****++
0.00082	10.5	8.0	4.0	7.5	0.6	C33U1821-30****++
0.0010	10.5	8.0	4.0	7.5	0.6	C33U1102-30****++
0.0012	10.5	9.0	4.0	7.5	0.6	C33U1122-30****++
0.0015	10.5	8.0	4.0	7.5	0.6	C33U1152-30****++
0.0018	10.5	11.0	5.0	7.5	0.6	C33U1182-30****++
0.0022	10.5	11.0	5.0	7.5	0.6	C33U1222-30****++
0.0027	10.5	11.0	5.0	7.5	0.6	C33U1272-30****++
0.0033	10.5	12.0	6.0	7.5	0.6	C33U1332-30****++
0.0036	10.5	12.0	6.0	7.5	0.6	C33U1362-30****++
0.0039	10.5	12.0	6.0	7.5	0.6	C33U1392-30****++
0.0047	10.5	12.0	6.0	7.5	0.6	C33U1472-30****++
0.0056	13.0	9.0	4.0	10.0	0.6	C33U1561-40****++
0.0062	13.0	9.0	4.0	10.0	0.6	C33U1621-40****++
0.0068	13.0	9.0	4.0	10.0	0.6	C33U1681-40****++
0.0082	13.0	9.0	4.0	10.0	0.6	C33U1821-40****++
0.0010	13.0	8.0	4.0	10.0	0.6	C33U1102-40****++
0.0011	13.0	9.0	4.0	10.0	0.6	C33U1112-40****++
0.0012	13.0	9.0	4.0	10.0	0.6	C33U1122-40****++
0.0013	13.0	9.0	4.0	10.0	0.6	C33U1132-40****++
0.0015	13.0	9.0	4.0	10.0	0.6	C33U1152-40****++
0.0017	13.0	9.0	4.0	10.0	0.6	C33U1172-40****++
0.0018	13.0	9.0	4.0	10.0	0.6	C33U1182-40****++
0.0020	13.0	9.0	4.0	10.0	0.6	C33U1202-40****++
0.0022	13.0	9.0	4.0	10.0	0.6	C33U1222-40****++
0.0027	13.0	9.0	4.0	10.0	0.6	C33U1272-40****++
0.0030	13.0	9.0	4.0	10.0	0.6	C33U1302-40****++
0.0033	13.0	9.0	4.0	10.0	0.6	C33U1332-40****++
0.0036	13.0	11.0	5.0	10.0	0.6	C33U1362-40****++
0.0039	13.0	11.0	5.0	10.0	0.6	C33U1392-40****++
0.0047	13.0	11.0	5.0	10.0	0.6	C33U1472-40****++
0.0056	13.0	11.0	5.0	10.0	0.6	C33U1562-40****++
0.0068	13.0	12.0	6.0	10.0	0.6	C33U1682-40****++
0.0082	13.0	12.0	6.0	10.0	0.6	C33U1822-40****++
0.010	13.0	13.0	7.0	10.0	0.6	C33U1103-40****++
0.012	13.0	14.0	8.0	10.0	0.6	C33U1123-40****++

600Vac						
C <sub>N</sub> (μF)	W	H	T	P	d	Part number
0.0010	17.5	11.0	5.0	15.0	0.8	C33U1102-80****++
0.0012	17.5	11.0	5.0	15.0	0.8	C33U1122-80****++
0.0015	17.5	11.0	5.0	15.0	0.8	C33U1152-80****++
0.0018	17.5	11.0	5.0	15.0	0.8	C33U1182-80****++
0.0022	17.5	11.0	5.0	15.0	0.8	C33U1222-80****++
0.0027	17.5	11.0	5.0	15.0	0.8	C33U1272-80****++
0.0033	17.5	11.0	5.0	15.0	0.8	C33U1332-80****++
0.0039	17.5	11.0	5.0	15.0	0.8	C33U1392-80****++
0.0047	17.5	11.0	5.0	15.0	0.8	C33U1472-80****++
0.0056	17.5	11.0	5.0	15.0	0.8	C33U1562-80****++
0.0068	17.5	11.0	5.0	15.0	0.8	C33U1682-80****++
0.0082	17.5	12.0	6.0	15.0	0.8	C33U1822-80****++
0.010	17.5	12.0	6.0	15.0	0.8	C33U1103-80****++
0.012	17.5	12.0	6.0	15.0	0.8	C33U1123-80****++
0.015	17.5	13.5	7.5	15.0	0.8	C33U1153-80****++
0.018	17.5	13.5	7.5	15.0	0.8	C33U1183-80****++
0.022	17.5	14.5	8.5	15.0	0.8	C33U1223-80****++
0.027	17.5	16.0	10.0	15.0	0.8	C33U1273-80****++
0.033	17.5	16.0	10.0	15.0	0.8	C33U1333-80****++
0.039	17.5	19.0	11.0	15.0	0.8	C33U1393-80****++
0.047	17.5	19.0	11.0	15.0	0.8	C33U1473-80****++
0.015	26.5	15.0	6.0	22.5	0.8	C33U1153-90****++
0.018	26.5	15.0	6.0	22.5	0.8	C33U1183-90****++
0.022	26.5	15.0	6.0	22.5	0.8	C33U1223-90****++
0.027	26.5	16.0	7.0	22.5	0.8	C33U1273-90****++
0.033	26.5	16.0	7.0	22.5	0.8	C33U1333-90****++
0.039	26.5	17.0	8.5	22.5	0.8	C33U1393-90****++
0.047	26.5	18.5	10.0	22.5	0.8	C33U1473-90****++
0.056	26.5	18.5	10.0	22.5	0.8	C33U1563-90****++
0.068	26.5	22.0	12.0	22.5	0.8	C33U1683-90****++
0.082	26.5	22.0	12.0	22.5	0.8	C33U1823-90****++
0.10	26.5	22.0	12.0	22.5	0.8	C33U1104-90****++

备注: 1. “-”表示容量偏差。 “-”=capacitance tolerance code, K=±10%, J=±5.0%, H=±3.0%  
2. “\*\*\*\*”表示引线加工和包装代码(见表1)。“\*\*\*\*\*”=lead form and packing code (refer to table 1)



■ 外形尺寸 Dimensions (mm)

700Vac						
C <sub>N</sub> (μF)	W	H	T	P	d	Part number
0.00056	13.0	9.0	4.0	10.0	0.8	C33V1561-40*****++
0.00062	13.0	9.0	4.0	10.0	0.8	C33V1621-40*****++
0.00068	13.0	9.0	4.0	10.0	0.8	C33V1681-40*****++
0.00082	13.0	9.0	4.0	10.0	0.8	C33V1821-40*****++
0.0010	13.0	9.0	4.0	10.0	0.8	C33V1102-40*****++
0.0012	13.0	9.0	4.0	10.0	0.8	C33V1122-40*****++
0.0015	13.0	11.0	5.0	10.0	0.8	C33V1152-40*****++
0.0018	13.0	11.0	5.0	10.0	0.8	C33V1182-40*****++
0.0022	13.0	11.0	5.0	10.0	0.8	C33V1222-40*****++
0.0027	13.0	11.0	5.0	10.0	0.8	C33V1272-40*****++
0.0033	13.0	12.0	6.0	10.0	0.8	C33V1332-40*****++
0.0038	13.0	12.0	6.0	10.0	0.8	C33V1382-40*****++
0.0056	13.0	12.0	6.0	10.0	0.8	C33V1562-40*****++
0.0068	13.0	12.0	6.0	10.0	0.8	C33V1682-40*****++
0.0082	13.0	13.0	7.0	10.0	0.8	C33V1822-40*****++
0.010	13.0	13.0	7.0	10.0	0.8	C33V1103-40*****++
0.012	13.0	14.0	8.0	10.0	0.8	C33V1123-40*****++
0.015	17.5	11.0	5.0	15.0	0.8	C33V1561-80*****++
0.0062	17.5	11.0	5.0	15.0	0.8	C33V1621-80*****++
0.0068	17.5	11.0	5.0	15.0	0.8	C33V1681-80*****++
0.0082	17.5	11.0	5.0	15.0	0.8	C33V1821-80*****++
0.0010	17.5	11.0	5.0	15.0	0.8	C33V1102-80*****++
0.0012	17.5	11.0	5.0	15.0	0.8	C33V1122-80*****++
0.0015	17.5	11.0	5.0	15.0	0.8	C33V1152-80*****++
0.0018	17.5	11.0	5.0	15.0	0.8	C33V1182-80*****++
0.0022	17.5	11.0	5.0	15.0	0.8	C33V1222-80*****++
0.0027	17.5	11.0	5.0	15.0	0.8	C33V1272-80*****++
0.0033	17.5	11.0	5.0	15.0	0.8	C33V1332-80*****++
0.0038	17.5	11.0	5.0	15.0	0.8	C33V1382-80*****++
0.0047	17.5	11.0	5.0	15.0	0.8	C33V1472-80*****++
0.0056	17.5	12.0	6.0	15.0	0.8	C33V1562-80*****++
0.0068	17.5	12.0	6.0	15.0	0.8	C33V1682-80*****++
0.0082	17.5	13.5	7.5	15.0	0.8	C33V1822-80*****++
0.010	17.5	13.5	7.5	15.0	0.8	C33V1103-80*****++
0.012	17.5	14.5	8.5	15.0	0.8	C33V1123-80*****++
0.015	17.5	14.5	8.5	15.0	0.8	C33V1153-80*****++
0.018	17.5	16.0	10.0	15.0	0.8	C33V1183-80*****++
0.022	17.5	16.0	11.0	15.0	0.8	C33V1223-80*****++
0.0068	26.5	15.0	6.0	22.5	0.8	C33V1682-90*****++
0.0082	26.5	15.0	6.0	22.5	0.8	C33V1822-90*****++
0.010	26.5	15.0	6.0	22.5	0.8	C33V1103-90*****++
0.012	26.5	15.0	6.0	22.5	0.8	C33V1123-90*****++
0.015	26.5	15.0	6.0	22.5	0.8	C33V1153-90*****++
0.018	26.5	16.0	7.0	22.5	0.8	C33V1183-90*****++
0.022	26.5	17.0	8.5	22.5	0.8	C33V1223-90*****++
0.027	26.5	17.0	8.5	22.5	0.8	C33V1273-90*****++
0.033	26.5	18.5	10.0	22.5	0.8	C33V1333-90*****++
0.038	26.5	18.5	10.0	22.5	0.8	C33V1383-90*****++
0.047	26.5	22.0	12.0	22.5	0.8	C33V1473-90*****++
0.056	26.5	22.0	12.0	22.5	0.8	C33V1563-90*****++

900Vac						
C <sub>N</sub> (μF)	W	H	T	P	d	Part number
0.00068	17.5	11.0	5.0	15.0	0.8	C33X1681-80*****++
0.00082	17.5	11.0	5.0	15.0	0.8	C33X1821-80*****++
0.0010	17.5	11.0	5.0	15.0	0.8	C33X1102-80*****++
0.0012	17.5	11.0	5.0	15.0	0.8	C33X1122-80*****++
0.0015	17.5	11.0	5.0	15.0	0.8	C33X1152-80*****++
0.0018	17.5	11.0	5.0	15.0	0.8	C33X1182-80*****++
0.0022	17.5	11.0	5.0	15.0	0.8	C33X1222-80*****++
0.0027	17.5	11.0	5.0	15.0	0.8	C33X1272-80*****++
0.0033	17.5	11.0	5.0	15.0	0.8	C33X1332-80*****++
0.0038	17.5	12.0	6.0	15.0	0.8	C33X1382-80*****++
0.0047	17.5	12.0	6.0	15.0	0.8	C33X1472-80*****++
0.0056	17.5	12.0	6.0	15.0	0.8	C33X1562-80*****++
0.0068	17.5	13.5	7.5	15.0	0.8	C33X1682-80*****++
0.0082	17.5	13.5	7.5	15.0	0.8	C33X1822-80*****++
0.010	17.5	14.5	8.5	15.0	0.8	C33X1103-80*****++
0.012	17.5	16.0	10.0	15.0	0.8	C33X1123-80*****++
0.015	17.5	16.0	10.0	15.0	0.8	C33X1153-80*****++
0.018	17.5	16.0	11.0	15.0	0.8	C33X1183-80*****++
0.0022	26.5	15.0	6.0	22.5	0.8	C33X1222-90*****++
0.0027	26.5	15.0	6.0	22.5	0.8	C33X1272-90*****++
0.0033	26.5	15.0	6.0	22.5	0.8	C33X1332-90*****++
0.0038	26.5	15.0	6.0	22.5	0.8	C33X1382-90*****++
0.0047	26.5	15.0	6.0	22.5	0.8	C33X1472-90*****++
0.0056	26.5	15.0	6.0	22.5	0.8	C33X1562-90*****++
0.0068	26.5	15.0	6.0	22.5	0.8	C33X1682-90*****++
0.0082	26.5	15.0	6.0	22.5	0.8	C33X1822-90*****++
0.010	26.5	16.0	7.0	22.5	0.8	C33X1103-90*****++
0.012	26.5	16.0	7.0	22.5	0.8	C33X1123-90*****++
0.015	26.5	17.0	8.5	22.5	0.8	C33X1153-90*****++
0.018	26.5	18.5	10.0	22.5	0.8	C33X1183-90*****++
0.022	26.5	18.5	10.0	22.5	0.8	C33X1223-90*****++
0.027	26.5	22.0	12.0	22.5	0.8	C33X1273-90*****++
0.033	26.5	22.0	12.0	22.5	0.8	C33X1333-90*****++

备注: 1. “-”表示容量偏差。 “-”=capacitance tolerance code, H=±3.0%, J=±5.0%, K=±10%  
2. “\*\*\*\*\*”表示引线加工和包装代码(见table 1)。“\*\*\*\*\*”=lead form and packing code (refer to table 1)