


## Features

### EDLC (Electric Double Layer Capacitor)

- High Power Density (Low ESR)
- Over 500,000 cycle life (semi-permanent)
- Short-term Peak Power assist applications
- RoHS compliant



## Drawing

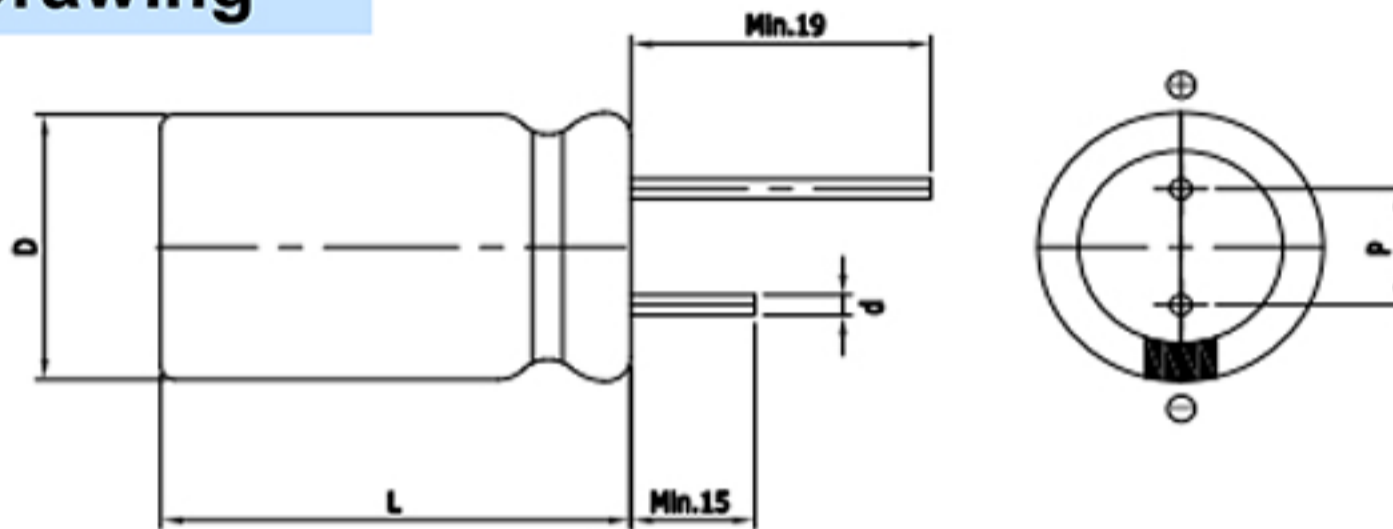

D (Φ)	8.0 +1.0 Max
L (mm)	13.0 ±1.5
d (Φ)	0.6 ±0.1
P (mm)	3.5 ±0.5

## Specification

Item	Characteristics							
Product series	EDLC							
Rated Voltage ( $V_R$ )	3.0V							
Operating Temperature	-40 ~ +65°C							
Capacitance Tolerance	-10 ~ +30%							
High Temperature Load Life	After 1,000 hours at $V_R$ loaded under +65°C, capacitors meet the following criteria.							
	Capacitance Change	≤ 30% of initial value						
	ESR	≤ 2 times of specified value						
	85°C Temperature	Max. 2.4V						
Cycle Life Characteristics	Cycle	Over 500,000						
	$\Delta C$	≤ 30% of initial value						
	ESR	≤ 2 times of specified value						
	Method	Cycle of Charge/discharge from $V_R$ to $1/2V_R$						
Shelf Life	3 Years No Electrical Charge, Temperature below 25°C ( $\Delta C$ : ≤ 10% of initial value / $\Delta ESR$ : ≤ 50% of specified value)							
Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)		Size (mm)
			AC(1kHz)	DC		@2.7V	@3.0V	D x L
VEC 3R0 105 QG	3.0	1	145	220	1.0	0.002	0.003	08 x 13