




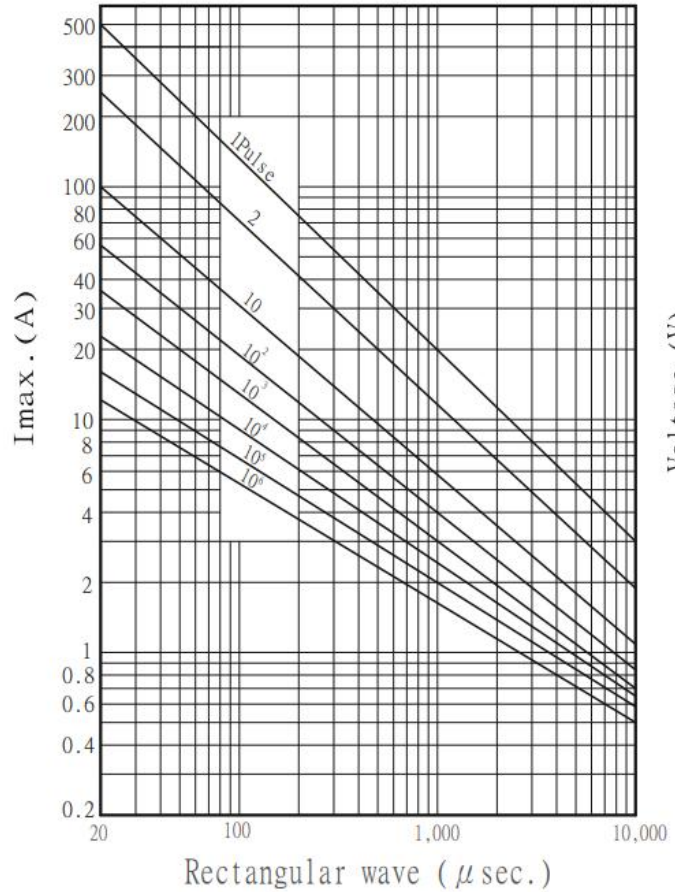
## RATING AND CHARACTERISTICS

High Surge Varistors - 7mm


Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVT 07S 180M	18	±20%	11	14	36	2.5	500	0.2	0.02	1.5	☆	☆	☆
JVT 07S 220L	22	±15%	14	18	43	2.5	500	0.2	0.02	1.7	☆	☆	☆
JVT 07S 270K	27	±10%	17	22	53	2.5	500	0.2	0.02	2.1	☆	☆	☆
JVT 07S 330K	33	±10%	20	26	65	2.5	500	0.2	0.02	2.8	☆	☆	☆
JVT 07S 390K	39	±10%	25	31	77	2.5	500	0.2	0.02	3.0	☆	☆	☆
JVT 07S 470K	47	±10%	30	38	93	2.5	500	0.2	0.02	3.8	☆	☆	☆
JVT 07S 560K	56	±10%	35	45	110	2.5	500	0.2	0.02	4.4	☆	☆	☆
JVT 07S 680K	68	±10%	40	56	135	2.5	500	0.2	0.02	5.4	☆	☆	☆
JVT 07S 820K	82	±10%	50	65	135	10	1750	0.5	0.25	7.0	☆	☆	☆
JVT 07S 101K	100	±10%	60	85	165	10	1750	0.5	0.25	9.0	☆	☆	☆
JVT 07S 121K	120	±10%	75	100	200	10	1750	0.5	0.25	11.0	☆	☆	☆
JVT 07S 151K	150	±10%	95	125	250	10	1750	0.5	0.25	13.0	☆	☆	☆
JVT 07S 181K	180	±10%	115	150	300	10	1750	0.5	0.25	16.0	☆	☆	☆
JVT 07S 201K	200	±10%	130	170	340	10	1750	0.5	0.25	17.5	☆	☆	☆
JVT 07S 221K	220	±10%	140	180	360	10	1750	0.5	0.25	19.0	☆	☆	☆

JVT 07S 241K	240	±10%	150	200	395	10	1750	0.5	0.25	21.0	☆	☆	☆
JVT 07S 271K	270	±10%	175	225	455	10	1750	0.5	0.25	24	☆	☆	☆
JVT 07S 301K	300	±10%	195	250	505	10	1750	0.5	0.25	26.0	☆	☆	☆
JVT 07S 331K	330	±10%	210	275	550	10	1750	0.5	0.25	28	☆	☆	☆
JVT 07S 361K	360	±10%	230	300	595	10	1750	0.5	0.25	32	☆	☆	☆
JVT 07S 391K	390	±10%	250	320	650	10	1750	0.5	0.25	35	☆	☆	☆
JVT 07S 431K	430	±10%	275	350	710	10	1750	0.5	0.25	40	☆	☆	☆
JVT 07S 471K	470	±10%	300	385	775	10	1750	0.5	0.25	42	☆	☆	☆
JVT 07S 511K	510	±10%	320	418	842	10	1750	0.5	0.25	45	☆	☆	☆
JVT 07S 561K	560	±10%	350	460	920	10	1750	0.5	0.25	51	☆	☆	☆
JVT 07S 621K	620	±10%	385	505	1025	10	1750	0.5	0.25	54	☆	☆	☆
JVT 07S 681K	680	±10%	420	560	1120	10	1750	0.5	0.25	56	☆	☆	☆
JVT 07S 751K	750	±10%	460	615	1240	10	1750	0.5	0.25	58	☆	☆	☆
JVT 07S 781K	780	±10%	485	640	1290	10	1750	0.5	0.25	59	☆	☆	☆
JVT 07S 821K	820	±10%	510	670	1355	10	1750	0.5	0.25	60	☆	☆	☆

Pulse Life time Ratings -7mm  
07S 180M~07 S680K




V-I Characteristic Curve -7mm  
07S 180M~07 S680K

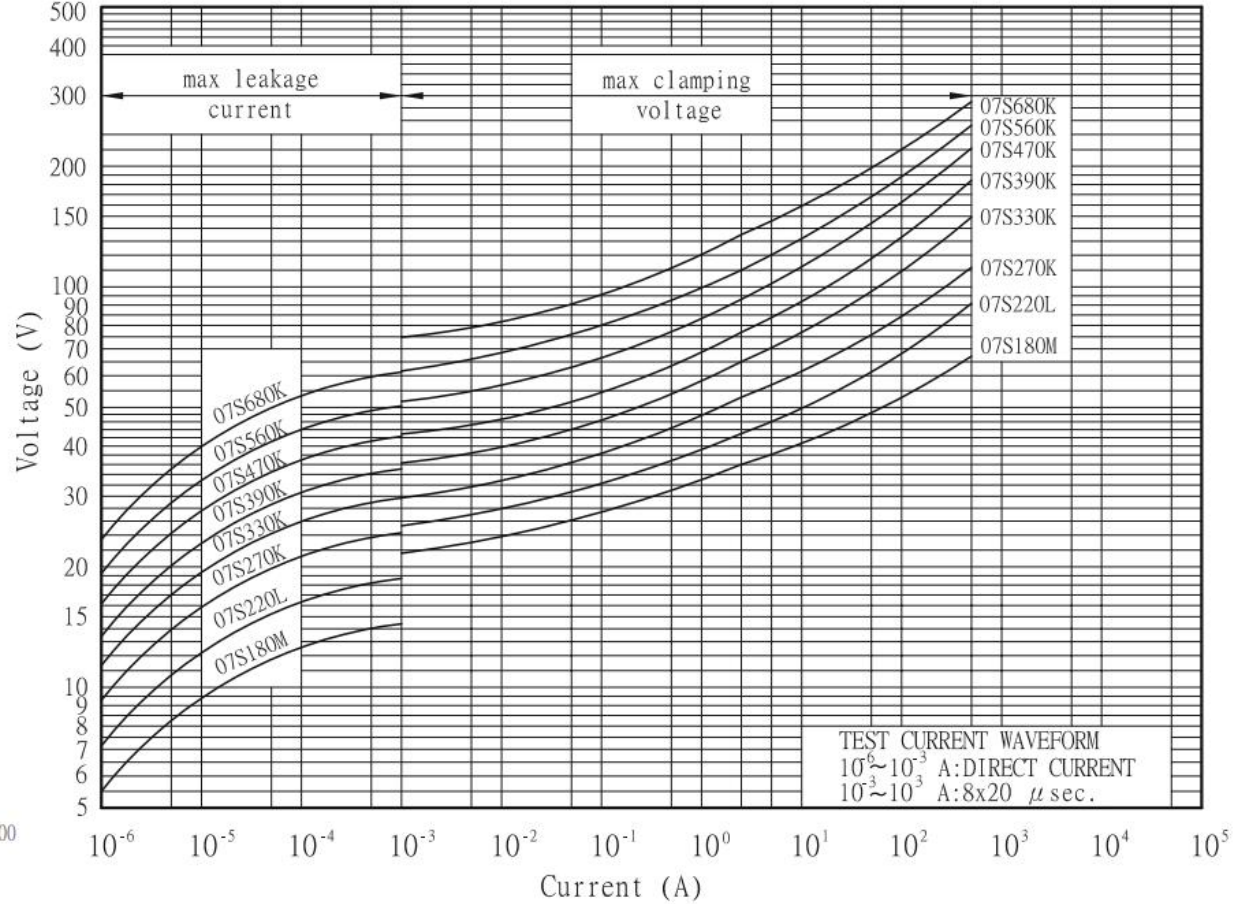

過電壓保護

07S 820K~07S 821K

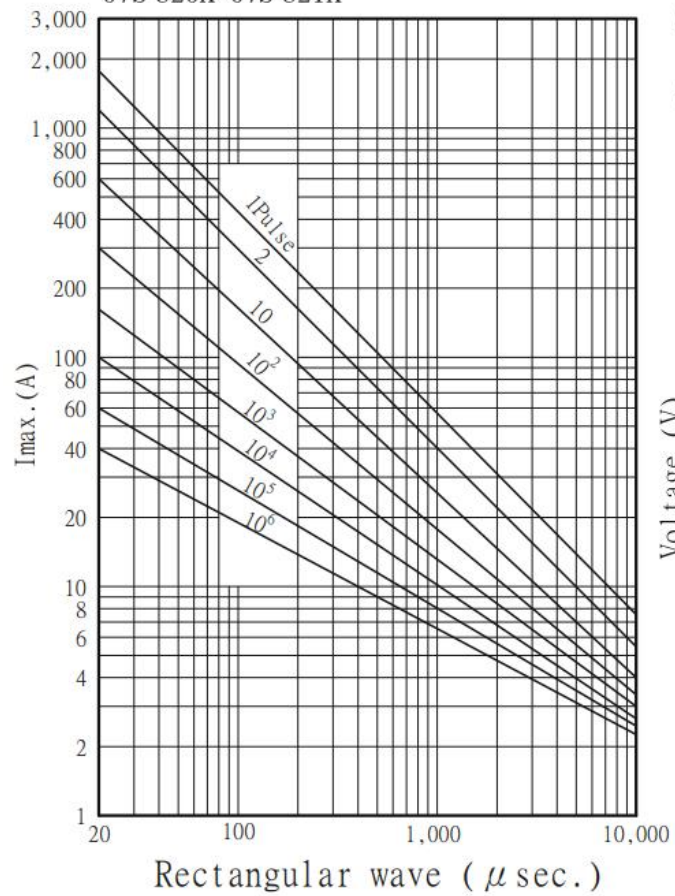

07S 820K~07S 821K

