


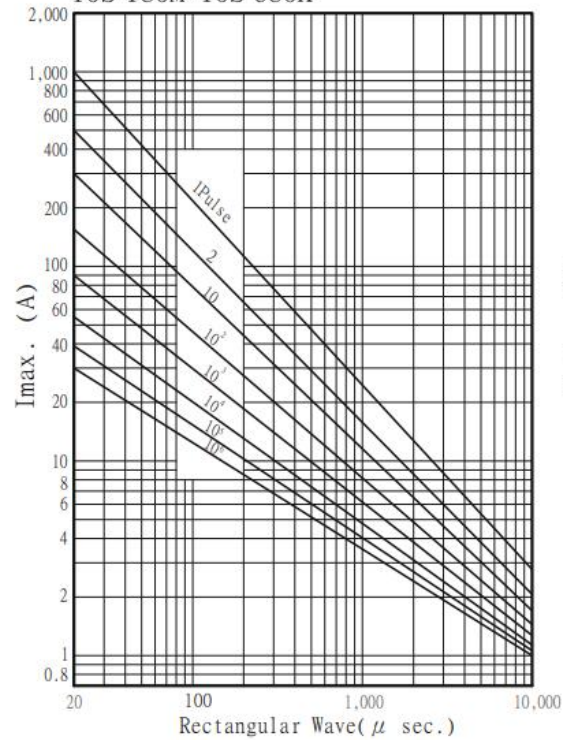


過電壓保護

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVT 10S 180M	18	±20%	11	14	36	5	1000	0.75	0.05	2.6	☆	☆	☆
JVT 10S 220L	22	±15%	14	18	43	5	1000	0.75	0.05	3.2	☆	☆	☆
JVT 10S 270K	27	±10%	17	22	53	5	1000	0.75	0.05	3.9	☆	☆	☆
JVT 10S 330K	33	±10%	20	26	65	5	1000	0.75	0.05	4.8	☆	☆	☆
JVT 10S 390K	39	±10%	25	31	77	5	1000	0.75	0.05	5.6	☆	☆	☆
JVT 10S 470K	47	±10%	30	38	93	5	1000	0.75	0.05	6.8	☆	☆	☆
JVT 10S 560K	56	±10%	35	45	110	5	1000	0.75	0.05	8.1	☆	☆	☆
JVT 10S 680K	68	±10%	40	56	150	5	1000	0.75	0.05	9.8	☆	☆	☆
JVT 10S 820K	82	±10%	50	65	135	25	3500	1.5	0.4	14.0	☆	☆	☆
JVT 10S 101K	100	±10%	60	85	165	25	3500	1.5	0.4	18.0	☆	☆	☆
JVT 10S 121K	120	±10%	75	100	200	25	3500	1.5	0.4	22.0	☆	☆	☆
JVT 10S 151K	150	±10%	95	125	250	25	3500	1.5	0.4	25.0	☆	☆	☆
JVT 10S 181K	180	±10%	115	150	300	25	3500	1.5	0.4	32.0	☆	☆	☆
JVT 10S 201K	200	±10%	130	170	340	25	3500	1.5	0.4	35.0	☆	☆	★
JVT 10S 221K	220	±10%	140	180	360	25	3500	1.5	0.4	39.0	☆	☆	★
JVT 10S 241K	240	±10%	150	200	395	25	3500	1.5	0.4	42.0	☆	☆	★
JVT 10S 271K	270	±10%	175	225	455	25	3500	1.5	0.4	49	☆	☆	★
JVT 10S 301K	300	±10%	195	250	505	25	3500	1.5	0.4	52.0	☆	☆	★

JVT 10S 331K	330	±10%	210	275	550	25	3500	1.5	0.4	58	☆	★	⊛
JVT 10S 361K	360	±10%	230	300	595	25	3500	1.5	0.4	65	☆	★	⊛
JVT 10S 391K	390	±10%	250	320	650	25	3500	1.5	0.4	70	☆	★	⊛
JVT 10S 431K	430	±10%	275	350	710	25	3500	1.5	0.4	80	☆	★	⊛
JVT 10S 471K	470	±10%	300	385	775	25	3500	1.5	0.4	85	☆	★	⊛
JVT 10S 511K	510	±10%	320	418	842	25	3500	1.5	0.4	92	☆	★	⊛
JVT 10S 561K	560	±10%	350	460	920	25	3500	1.5	0.4	102	☆	★	⊛
JVT 10S 621K	620	±10%	385	505	1025	25	3500	1.5	0.4	107	☆	★	⊛
JVT 10S 681K	680	±10%	420	560	1120	25	3500	1.5	0.4	112	☆	★	⊛
JVT 10S 751K	750	±10%	460	615	1240	25	3500	1.5	0.4	115	☆	★	⊛
JVT 10S 781K	780	±10%	485	640	1290	25	3500	1.5	0.4	116	☆	★	⊛
JVT 10S 821K	820	±10%	510	670	1355	25	3500	1.5	0.4	118	☆	★	⊛
JVT 10S 911K	910	±10%	550	745	1500	25	3500	1.5	0.4	127	☆	★	⊛
JVT 10S 102K	1000	±10%	625	825	1650	25	3500	1.5	0.4	140	☆	★	⊛
JVT 10S 112K	1100	±10%	680	895	1815	25	3500	1.5	0.4	155	☆	★	⊛

Pulse Life time Ratings-10mm
10S 180M~10S 680K



V-I Characteristic Curve-10mm
10S 180M~10S 680K

