


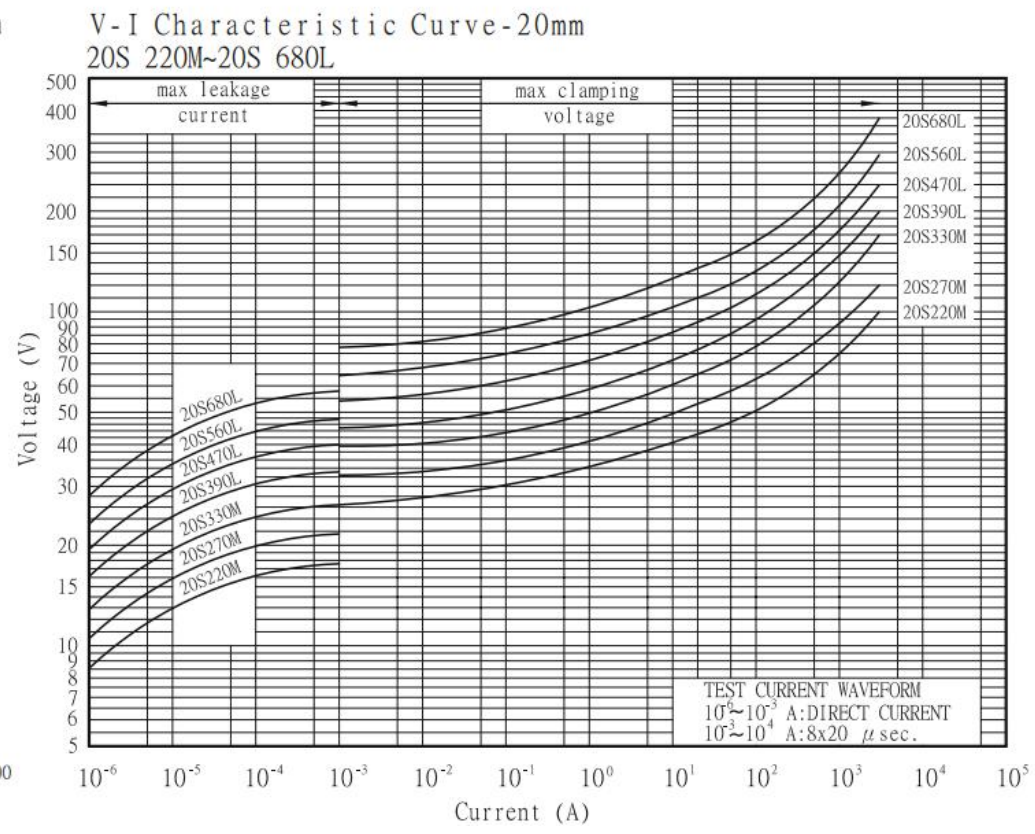
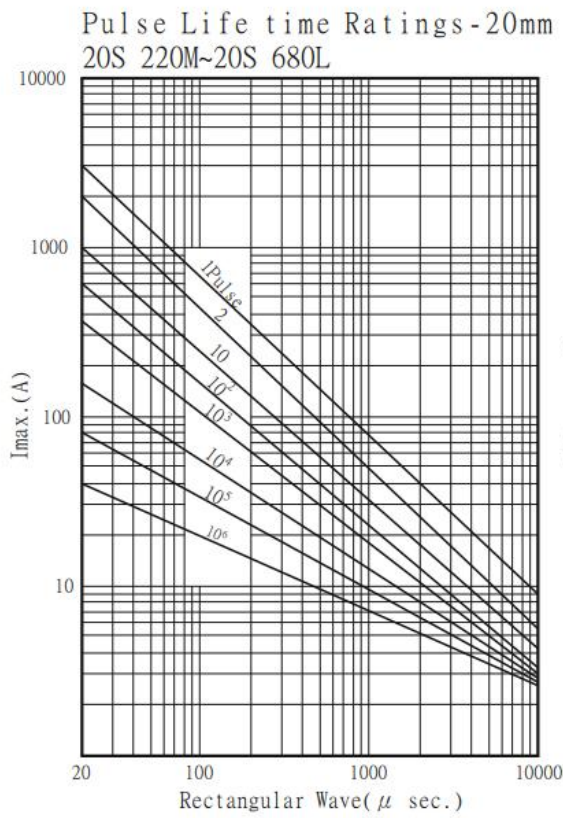


High Surge Varistors - 20mm

Part No.	Varistor Voltage at 1mA		Maximum Allowable Voltage		Maximum Clamping Voltage		Withstanding Surge Current (8/20us)	Nominal Discharge Current (8/20us)	Rated Wattage	Energy (10/1000us)	Certification		
	DC (V)	Tolerance	AC rms (V)	DC (V)	V@ ic (V)	ic (A)	1 Time (A)	In (KA)	(W)	(J)			
JVT 20S 220M	22	±20%	14	18	43	20	3000	2	0.2	16.0	☆	☆	☆
JVT 20S 270M	27	±20%	17	22	53	20	3000	2	0.2	19.0	☆	☆	☆
JVT 20S 330M	33	±20%	20	26	65	20	3000	2	0.2	24.0	☆	☆	☆
JVT 20S 390L	39	±15%	25	31	77	20	3000	2	0.2	28.0	☆	☆	☆
JVT 20S 470L	47	±15%	30	38	93	20	3000	2	0.2	34.0	☆	☆	☆
JVT 20S 560L	56	±15%	35	45	110	20	3000	2	0.2	41.0	☆	☆	☆
JVT 20S 680L	68	±15%	40	56	135	20	3000	2	0.2	49.0	☆	☆	☆
JVT 20S 820L	82	±15%	50	65	135	100	10000	4	1	56.0	☆	☆	☆
JVT 20S 101K	100	±10%	60	85	165	100	10000	4.0	1	72.0	☆	☆	☆
JVT 20S 121K	120	±10%	75	100	200	100	10000	4.0	1	88.0	☆	☆	☆
JVT 20S 151K	150	±10%	95	125	250	100	10000	4.0	1	106.0	☆	☆	☆
JVT 20S 181K	180	±10%	115	150	300	100	10000	4.0	1	130.0	☆	☆	☆
JVT 20S 201K	200	±10%	130	170	340	100	10000	4.0	1	140.0	☆	☆	★
JVT 20S 221K	220	±10%	140	180	360	100	10000	4.0	1	155.0	☆	☆	★
JVT 20S 241K	240	±10%	150	200	395	100	10000	4.0	1	168.0	☆	☆	★
JVT 20S 271K	270	±10%	175	225	455	100	10000	4.0	1	190.0	☆	☆	★
JVT 20S 301K	300	±10%	195	250	505	100	10000	4.0	1	210	☆	☆	★
JVT 20S 331K	330	±10%	210	275	550	100	10000	4.0	1	228.0	☆	☆	★

過電壓保護

JVT 20S 361K	360	±10%	230	300	595	100	10000	4.0	1	255	☆	☆	★
JVT 20S 391K	390	±10%	250	320	650	100	10000	4.0	1	275	☆	☆	★
JVT 20S 431K	430	±10%	275	350	710	100	10000	4.0	1	303	☆	☆	★
JVT 20S 471K	470	±10%	300	385	775	100	10000	4.0	1	350	☆	☆	★
JVT 20S 511K	510	±10%	320	418	842	100	10000	4.0	1	382	☆	☆	★
JVT 20S 561K	560	±10%	350	460	920	100	10000	4.0	1	410	☆	☆	★
JVT 20S 621K	620	±10%	385	505	1025	100	10000	4.0	1	420	☆	☆	★
JVT 20S 681K	680	±10%	420	560	1120	100	10000	4.0	1	430	☆	☆	★
JVT 20S 751K	750	±10%	460	615	1240	100	10000	4.0	1	440	☆	☆	★
JVT 20S 781K	780	±10%	485	640	1290	100	10000	4.0	1	450	☆	☆	★
JVT 20S 821K	820	±10%	510	670	1355	100	10000	4.0	1	460	☆	☆	★
JVT 20S 911K	910	±10%	550	745	1500	100	10000	4.0	1	510	☆	☆	★
JVT 20S 102K	1000	±10%	625	825	1650	100	10000	4.0	1	566	☆	☆	★
JVT 20S 112K	1100	±10%	680	895	1815	100	10000	4.0	1	620	☆	☆	★



過電壓保

