


BTMA Series

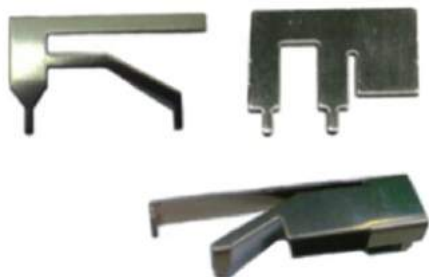


Features

- Small size low-profile, low cost and lightweight type
- Wide bandwidth and Omni-directional
- Supported with Dip-type, SMD, and Co-axial cable connecting
- Customized

Applications


- Bluetooth, Wireless Router, Set Top Box and Home digital
- ISM band, Lora, Sigfox, LTE, NB-IOT, GPS, WiFi and Car use.

Product Identification

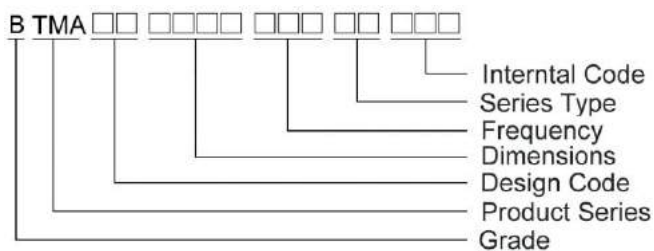


Shapes and Dimensions

BTMA0014082G4D1A01

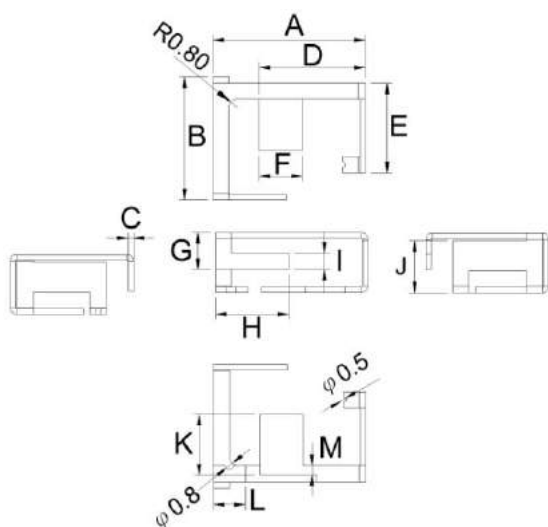

BTMA0014115G0D1A01

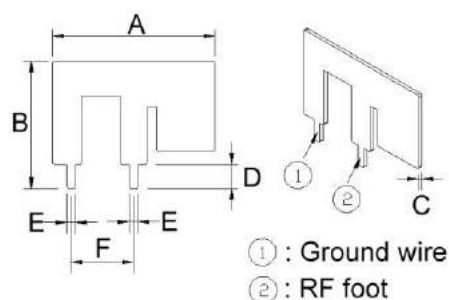


Dimensions in mm

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M
BTMA0014082G4D1A01	14.10	11.4	0.5	9.8	8.3	4.0	3.4	6.8	1.5	4.8	5.6	3	0.9
BTMA0014115G0D1A01	14.85	11.6	0.4	2.2	0.8	5.7	-	-	-	-	-	-	-


Metal Stamping Antenna BTMA Series

Shapes and Dimensions


BTMA00150925GD1A01

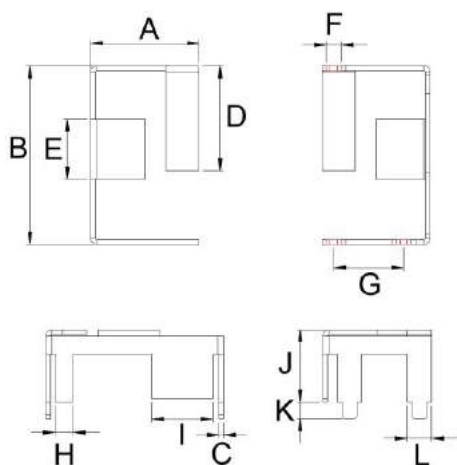


BTMA00151025GD1A02

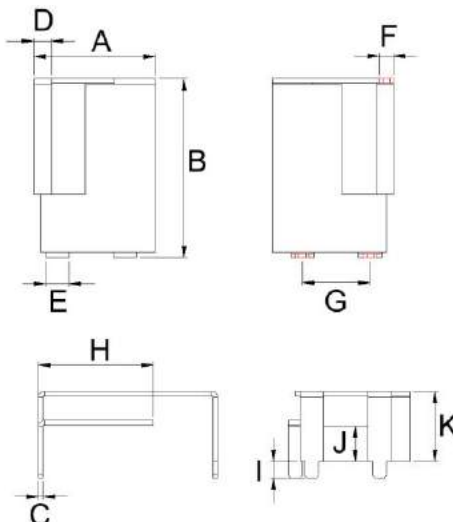


BTMA0017102G4D1A01

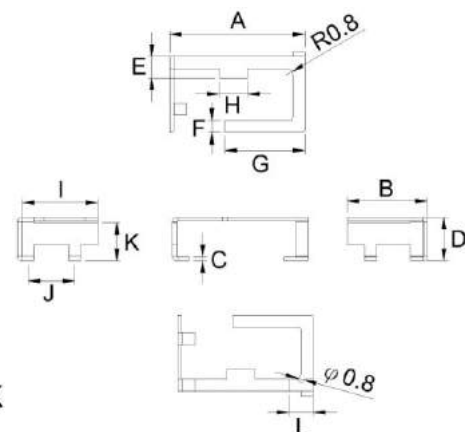


BTMA0017102G4D1A02

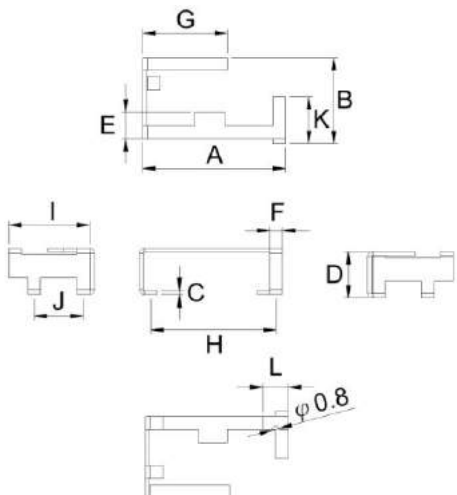

BTMA0027152G4C1A04

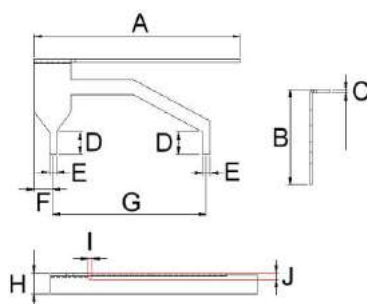

BTMA00290825GD1A02

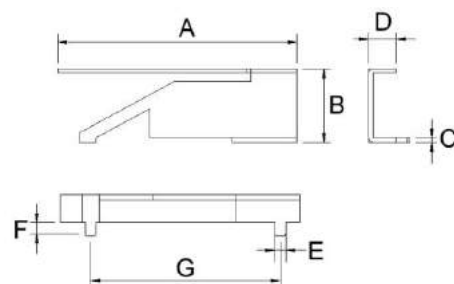

Dimensions in mm

TYPE	A	B	C	D	E	F	G	H	I	J	K	L
BTMA00150925GD1A01	9.0	14.8	0.4	8.7	5	3-1.2	5.8	1.5	5.1	6.0	1.4	2.0
BTMA00151025GD1A02	10.4	15.35	0.4	1.5	2.0	3-1.2	5.8	9.85	1.4	3.0	6.0	-
BTMA0017102G4D1A01	16.9	10.05	0.5	5.5	2.7	1.5	10.0	3.5	9.45	5.8	4.8	3.0
BTMA0017102G4D1A02	16.9	10.15	0.5	5.5	3.1	1.5	10.0	14.8	9.55	5.8	5.55	3.0
BTMA0027152G4C1A04	27.7	12.76	0.4	3.0	1.0	2.5	20.61	2.76	0.5	0.85	-	-
BTMA00290825GD1A02	26.0	8.0	0.5	3.0	1.2	1.5	20.6	-	-	-	-	-

Metal Stamping Antenna BTMA Series

Electrical Characteristics

Part Number	Frequency Range (GHz)	Impedance (Ω)	Return Loss dB(Max)	Radiation	Peak Gain (dBi)	Polarization
BTMA0014082G4D1A01	2.4~2.5	50	-7	Omni-directional	0.29	Linear Vertical
BTMA0014115G0D1A01	5.15~5.85	50	-10	Omni-directional	2.90	Linear Vertical
BTMA00150925GD1A01	2.4~2.5 5.15~5.85	50	-7	Omni-directional	2.64 4.75	Linear Vertical
BTMA00151025GD1A02	2.4~2.5 5.15~5.85	50	-6	Omni-directional	2.64 4.23	Linear Vertical
BTMA0017102G4D1A01	2.4~2.5 5.15~5.85	50	-5	Omni-directional	2.88 3.17	Linear Vertical
BTMA0017102G4D1A02	2.4~2.5 5.15~5.85	50	-4	Omni-directional	4.14 3.43	Linear Vertical
BTMA0027152G4C1A04	2.4~2.5	50	-10	Directional	3.19	Linear Vertical
BTMA00290825GD1A02	2.4~2.5 5.15~5.85	50	-10	Omni-directional	2.71 3.02	Linear Vertical



Physical Properties

Part Number	Antenna Material	Operating temperature range	Storage temperature range
BTMA0014082G4D1A01	SUS430 (First nickel plating)	- 20°C ~ +65°C	- 30°C ~ +75°C
BTMA0014115G0D1A01	SUS430 (First nickel plating)	- 20°C ~ +65°C	- 30°C ~ +75°C
BTMA00150925GD1A01	SUS430 (Nickel plating-Sn)	- 20°C ~ +65°C	- 30°C ~ +75°C
BTMA00151025GD1A02	SUS430 (Nickel plating-Sn)	- 20°C ~ +65°C	- 30°C ~ +75°C
BTMA0017102G4D1A01	SUS430 (First nickel plating)	- 20°C ~ +65°C	- 30°C ~ +75°C
BTMA0017102G4D1A02	SUS430 (First nickel plating)	- 20°C ~ +65°C	- 30°C ~ +75°C
BTMA0027152G4C1A04	SUS430 (First nickel plating)	- 20°C ~ +65°C	- 30°C ~ +75°C
BTMA00290825GD1A02	SUS430 (First nickel plating)	- 20°C ~ +65°C	- 30°C ~ +75°C


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

BTMA0014082G4D1A01

Experimental Setup

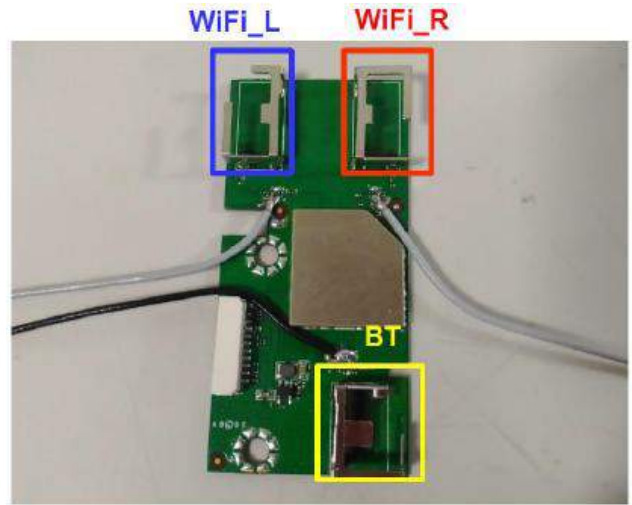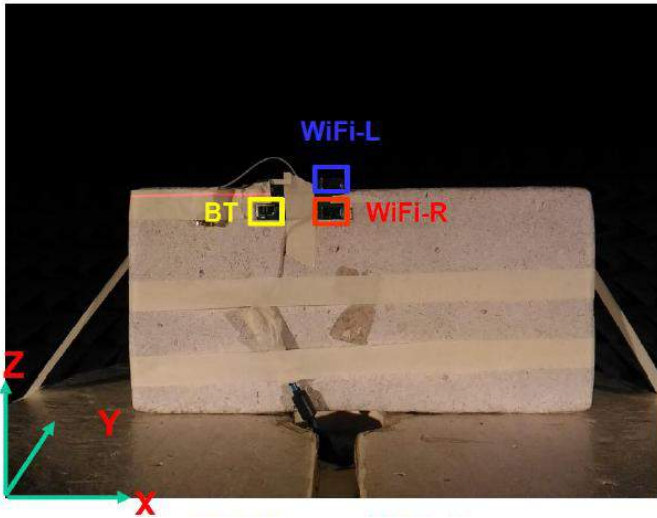


Return Loss S11

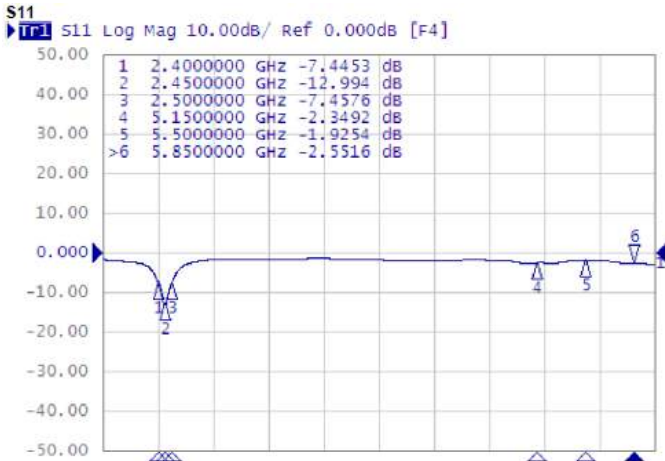


Frequency(MHz) : 2400~2500. Pattern Field : Z-X plane

Frequency(MHz) : 2400~2500. Pattern Field : Z-Y plane

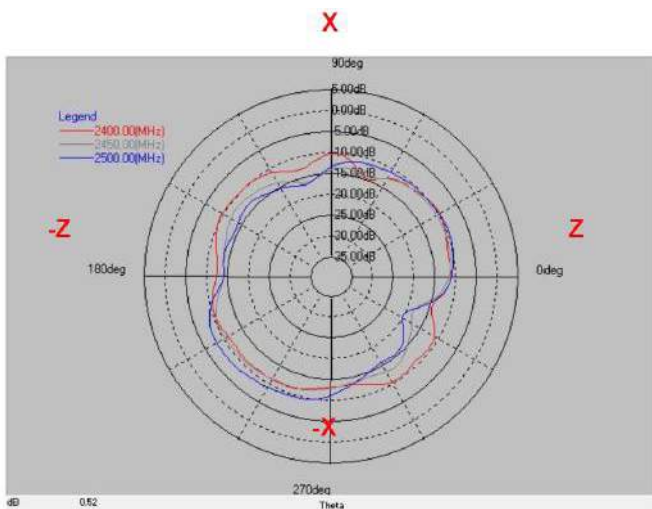


Layer	Max value	Min value	Average
2400(MHz)	-9.68 dB	-15.14 dB	-11.46 dB
2450(MHz)	-10.37 dB	-18.50 dB	-12.67 dB
2500(MHz)	-8.17 dB	-20.24 dB	-11.79 dB

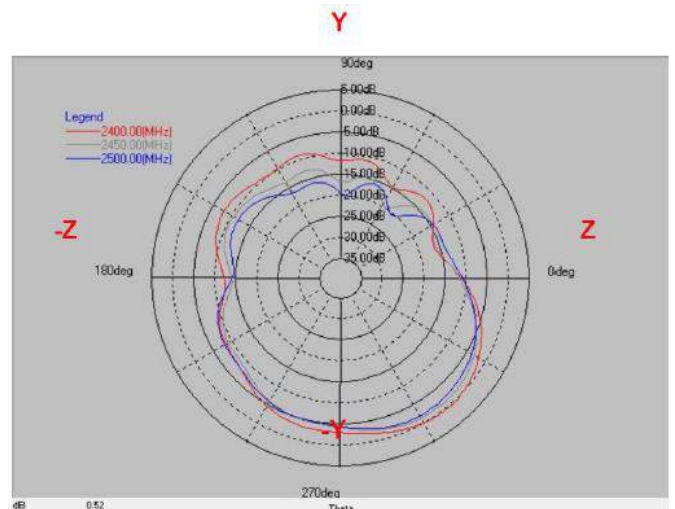


Layer	Max value	Min value	Average
2400(MHz)	0.30 dB	-16.47 dB	-5.83 dB
2450(MHz)	-1.28 dB	-20.09 dB	-7.28 dB
2500(MHz)	-1.98 dB	-20.67 dB	-7.65 dB

Metal Stamping Antenna BTMA Series

Frequency(MHz) : 2400~2500. Pattern Field : X-Y plane Peak Gain

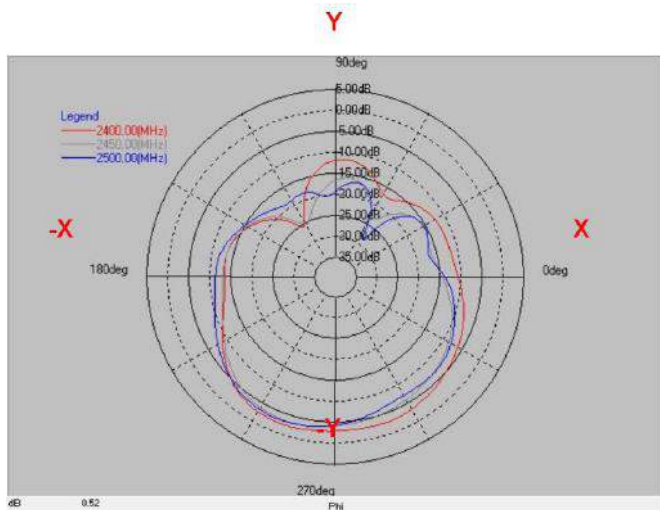

Layer	Max value	Min value	Average
2400(MHz)	-2.52 dB	-25.81 dB	-7.49 dB
2450(MHz)	-3.56 dB	-25.65 dB	-9.21 dB
2500(MHz)	-3.27 dB	-28.86 dB	-8.96 dB

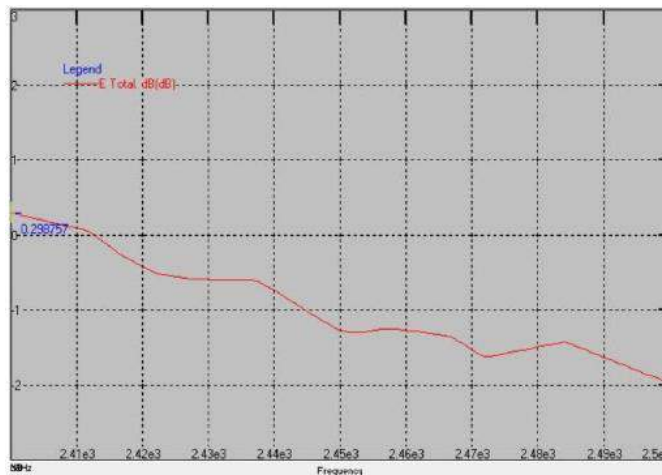


Peak Gain : Max 0.29 dBi

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Metal Stamping Antenna BTMA Series

BTMA0014115G0D1A01

Experimental Setup

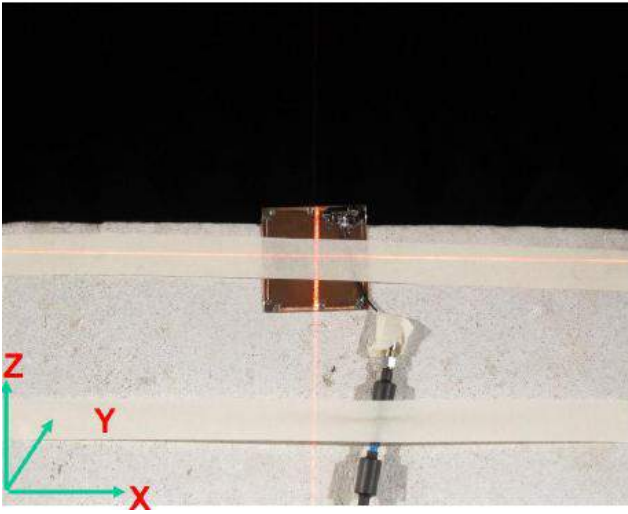


Frequency(MHz) : 5150~5850. Pattern Field : Z-X plane


Return Loss S11



Frequency(MHz) : 5150~5850. Pattern Field : Z-Y plane

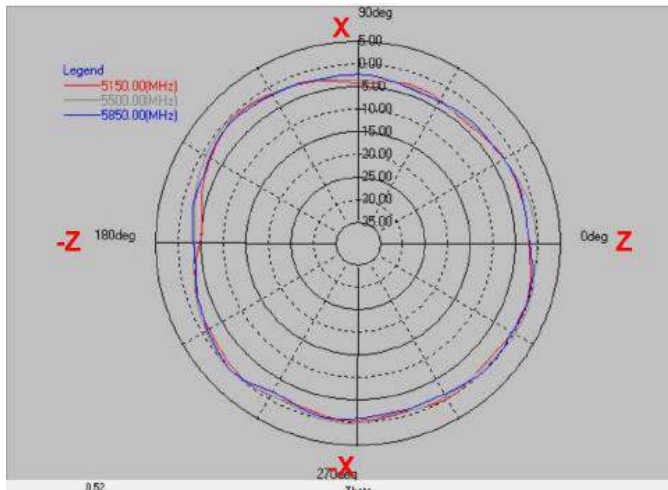


Layer	Max value	Min value	Average
5150(MHz)	-0.05 dB	-5.06 dB	-1.86 dB
5500(MHz)	0.51 dB	-3.81 dB	-1.34 dB
5850(MHz)	0.03 dB	-3.84 dB	-1.72 dB

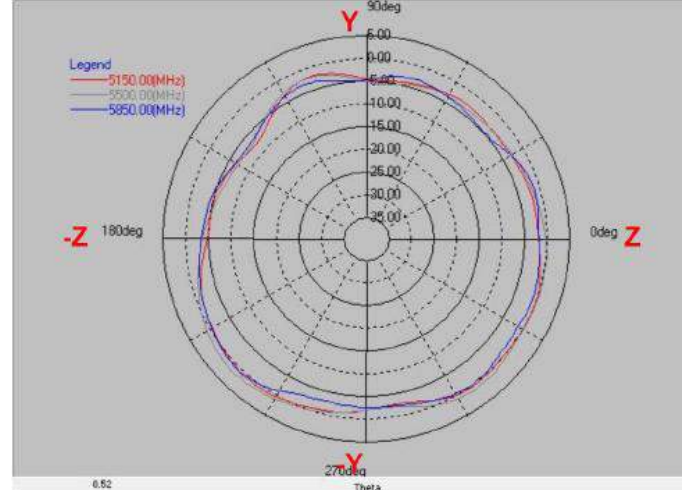


Layer	Max value	Min value	Average
5150(MHz)	0.61 dB	-7.89 dB	2.06 dB
5500(MHz)	1.60 dB	-7.46 dB	-1.51 dB
5850(MHz)	0.55 dB	-6.93 dB	-2.39 dB

Frequency(MHz) : 5150~5850. Pattern Field : X-Y plane

Peak Gain

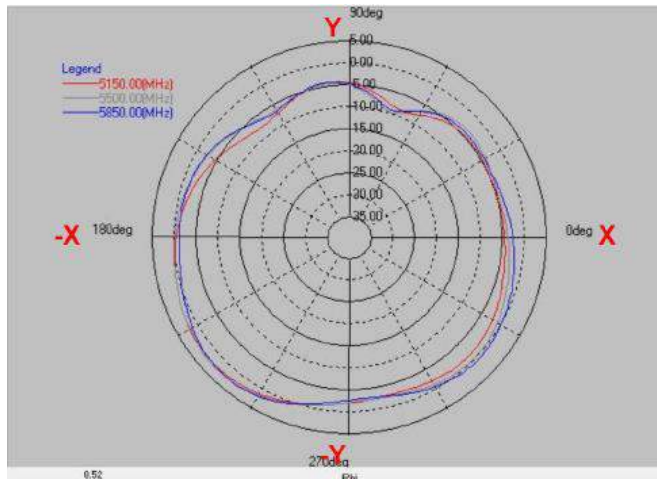

Layer	Max value	Min value	Average
5150(MHz)	2.31 dB	-8.83 dB	-2.14 dB
5500(MHz)	2.66 dB	-10.15 dB	-1.58 dB
5850(MHz)	2.51 dB	-9.38 dB	-1.60 dB

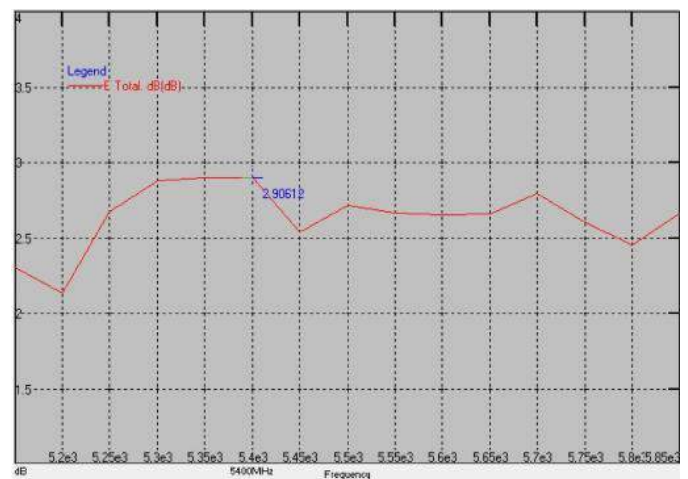



Peak Gain : Max 2.90 dBi

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.


Metal Stamping Antenna BTMA Series

BTMA00150925GD1A01

Experimental Setup

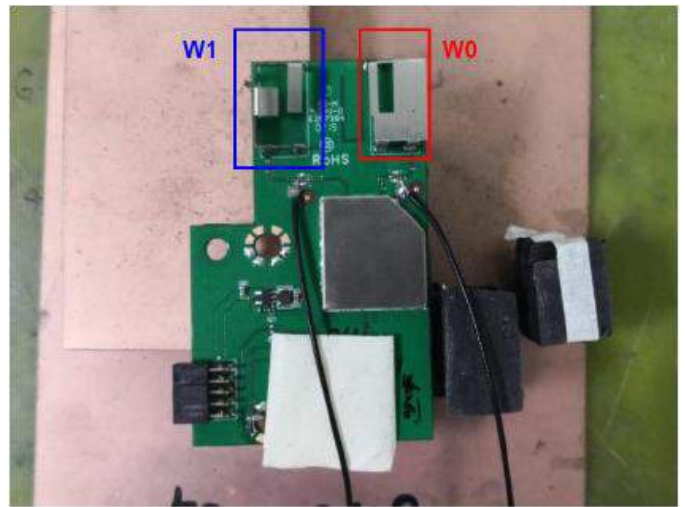
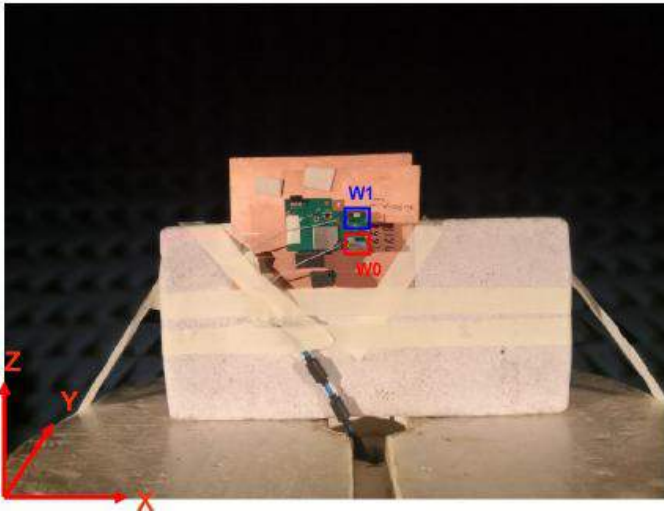


Return Loss S22

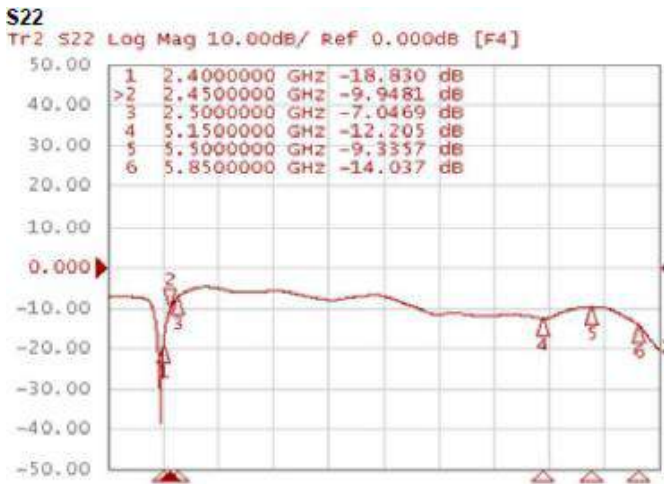

Frequency(MHz) : 2400~2500. Pattern Field : Z-X plane

Frequency(MHz) : 5150~5850. Pattern Field : Z-X plane

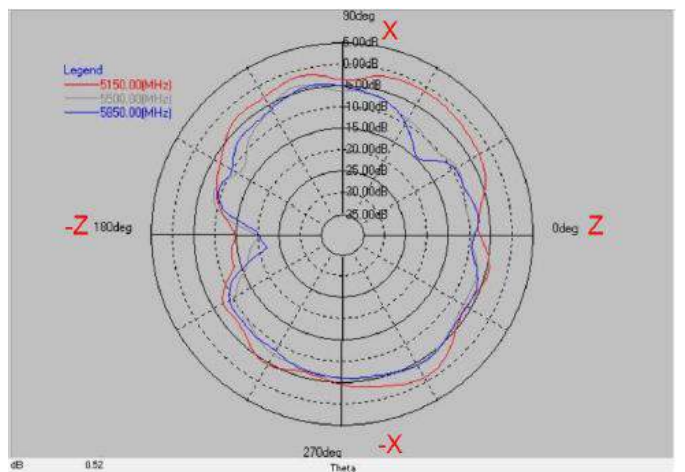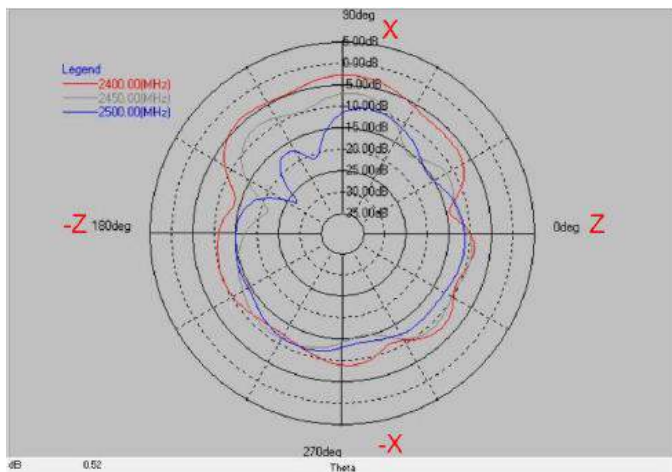


Layer	Max value	Min value	Average
2400(MHz)	-2.86 dB	-14.14 dB	-7.63 dB
2450(MHz)	-7.05 dB	-21.75 dB	-11.17 dB
2400(MHz)	-10.20 dB	-27.18 dB	-13.38 dB

Layer	Max value	Min value	Average
5150(MHz)	-1.19 dB	-14.72 dB	-4.27 dB
5500(MHz)	-3.75 dB	-20.07 dB	-7.69 dB
5850(MHz)	-4.43 dB	-21.96 dB	-7.58 dB

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.


Metal Stamping Antenna BTMA Series

Frequency(MHz) : 2400~2500. Pattern Field : Z-Y plane

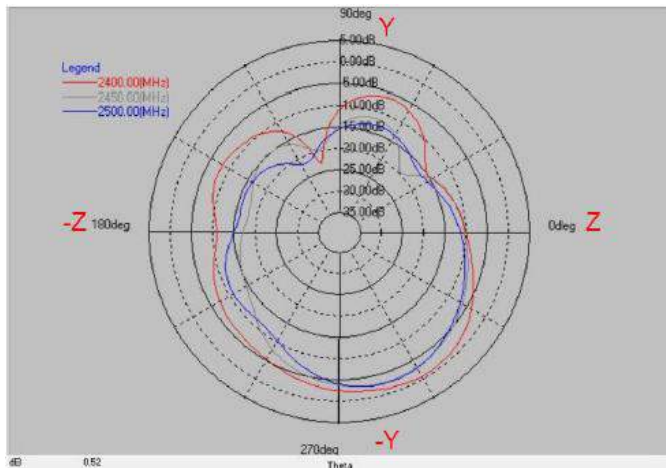


Layer	Max value	Min value	Average
2400(MHz)	-0.79 dB	-23.38 dB	-6.13 dB
2450(MHz)	-2.97 dB	-19.97 dB	-8.86 dB
2400(MHz)	-2.79 dB	-22.09 dB	-9.15 dB

Frequency(MHz) : 5150~5850. Pattern Field : Z-Y plane

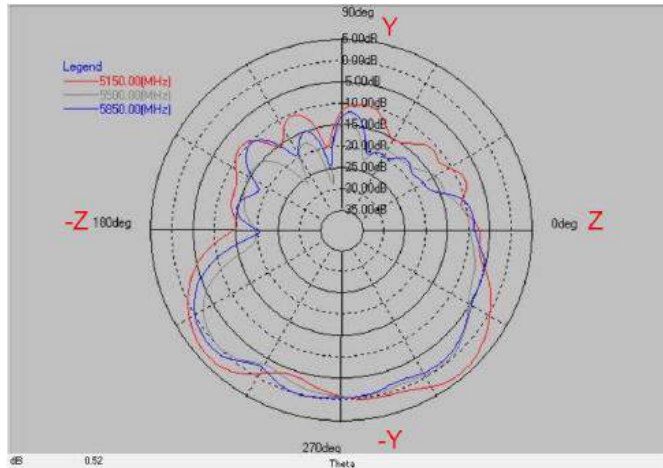


Layer	Max value	Min value	Average
5150(MHz)	3.91 dB	-20.30 dB	-2.51 dB
5500(MHz)	-0.15 dB	-28.99 dB	-5.54 dB
5850(MHz)	1.26 dB	-25.01 dB	-4.77 dB

Frequency(MHz) : 2400~2500. Pattern Field : X-Y plane

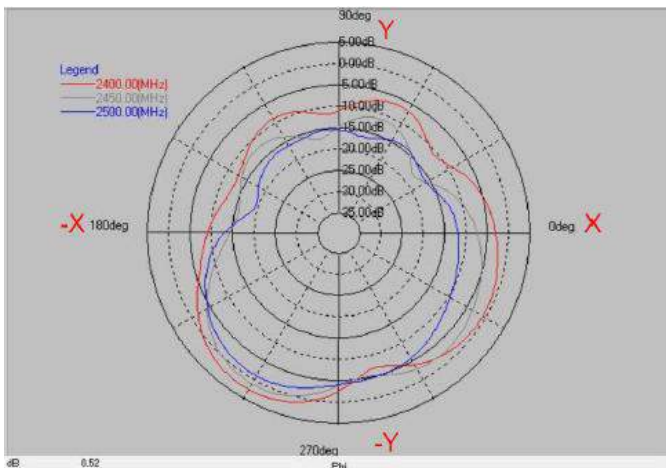

Layer	Max value	Min value	Average
2400(MHz)	2.60 dB	-13.00 dB	-3.43dB
2450(MHz)	0.96 dB	-17.80 dB	-5.47 dB
2500(MHz)	-1.16 dB	-19.46 dB	-7.55 dB

Frequency(MHz) : 5150~5850. Pattern Field : X-Y plane

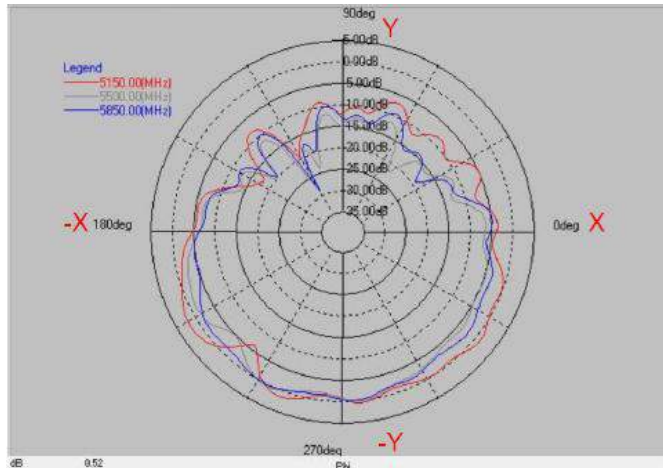

Layer	Max value	Min value	Average
5150(MHz)	2.05 dB	-19.74 dB	-2.89 dB
5500(MHz)	0.31 dB	-26.05 dB	-5.10 dB
5850(MHz)	-0.01 dB	-29.00 dB	-4.68 dB

Peak Gain

2G

Frequency (MHz)	Peak Gain (dBi)
2400	2.64
2410	2.22
2420	1.84
2430	1.85
2440	1.39
2450	1.15
2460	0.60
2470	0.07
2480	-0.18
2490	-0.67
2500	-0.56

5G



Frequency (MHz)	Peak Gain (dBi)	Frequency (MHz)	Peak Gain (dBi)
5150	4.75	5700	1.02
5200	4.65	5750	1.21
5250	3.95	5800	1.76
5300	4.44	5850	1.47
5350	3.79		
5400	3.08		
5450	1.86		
5500	1.42		
5550	1.02		
5600	0.81		
5650	1.15		

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.


Metal Stamping Antenna BTMA Series

BTMA00151025GD1A02


Experimental Setup

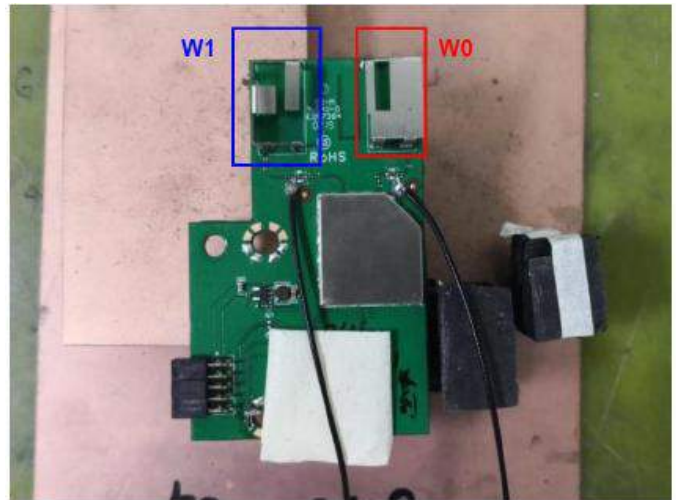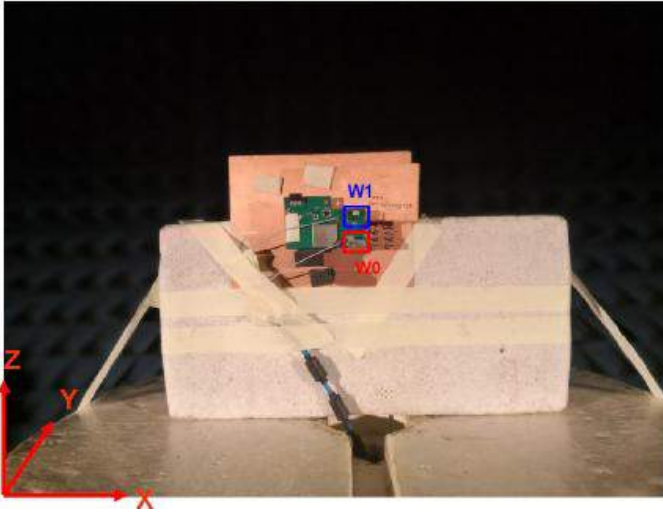

Return Loss S11

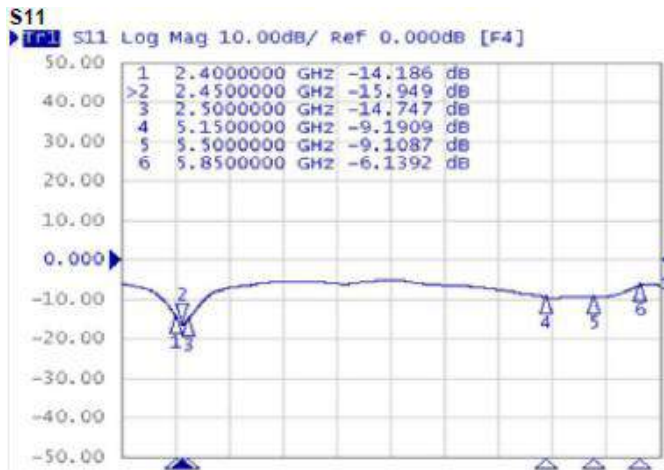


Frequency(MHz) : 2400~2500. Pattern Field : Z-X plane

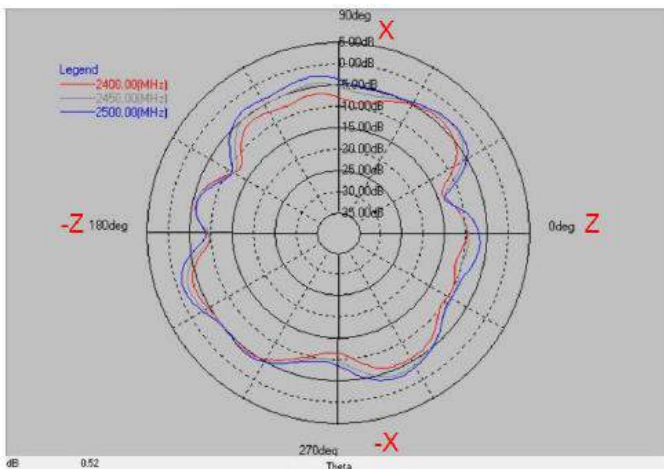

Layer	Max value	Min value	Average
2400(MHz)	-3.84 dB	-13.97 dB	-7.26 dB
2450(MHz)	-2.47 dB	-13.35 dB	-6.04 dB
2400(MHz)	-1.35 dB	-13.67 dB	-5.24 dB

Frequency(MHz) : 5150~5850. Pattern Field : Z-X plane

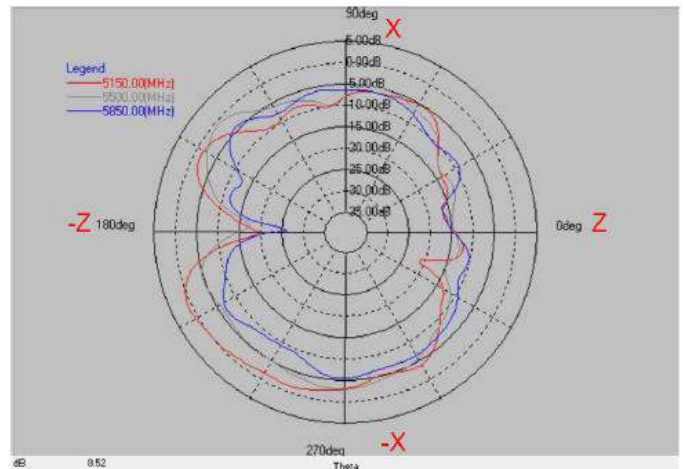


Layer	Max value	Min value	Average
5150(MHz)	0.83 dB	-21.25 dB	-5.01 dB
5500(MHz)	-0.91 dB	-17.69 dB	-6.29 dB
5850(MHz)	-4.37 dB	-26.43 dB	-8.33 dB

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.


Metal Stamping Antenna BTMA Series

Frequency(MHz) : 2400~2500. Pattern Field : Z-Y plane

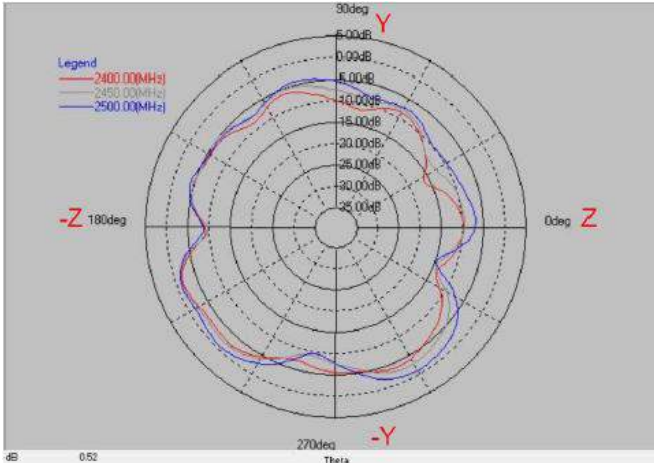


Layer	Max value	Min value	Average
2400(MHz)	-1.67 dB	-16.44 dB	-6.59 dB
2450(MHz)	-1.29 dB	-14.55 dB	-5.98 dB
2500(MHz)	-0.83 dB	-14.85 dB	-4.86 dB

Frequency(MHz) : 5150~5850. Pattern Field : Z-Y plane

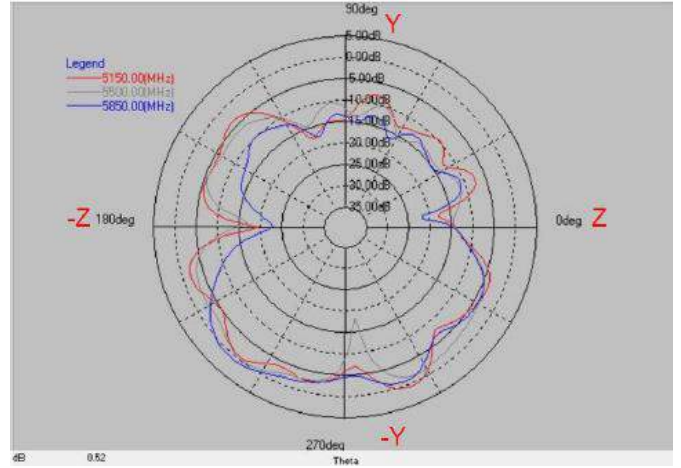


Layer	Max value	Min value	Average
5150(MHz)	0.52 dB	-19.78 dB	-5.44 dB
5500(MHz)	-0.30 dB	-18.34 dB	-5.76 dB
5850(MHz)	0.73 dB	-23.02 dB	-6.04 dB

Frequency(MHz) : 2400~2500. Pattern Field : X-Y plane

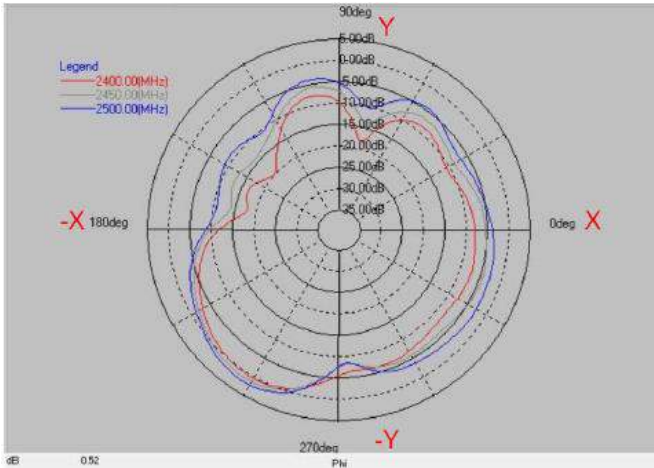

Layer	Max value	Min value	Average
2400(MHz)	0.29 dB	-20.04 dB	-6.33 dB
2450(MHz)	1.22 dB	-14.26 dB	-5.10 dB
2500(MHz)	2.17 dB	-10.99 dB	-3.75 dB

Frequency(MHz) : 5150~5850. Pattern Field : X-Y plane

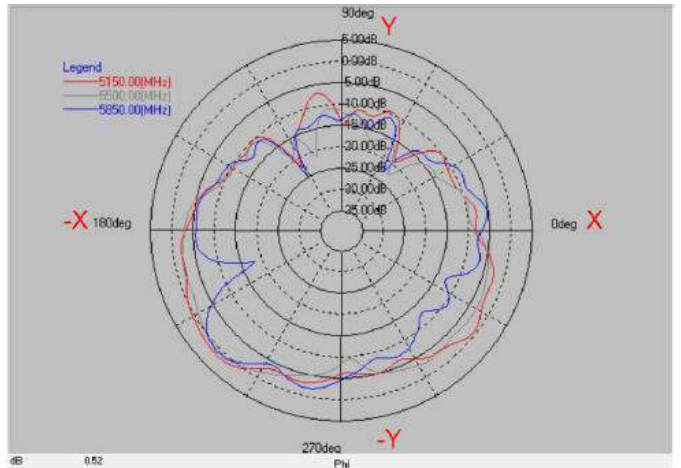

Layer	Max value	Min value	Average
5150(MHz)	1.56 dB	-22.61 dB	-4.49 dB
5500(MHz)	0.53 dB	-22.96 dB	-5.27 dB
5850(MHz)	0.92 dB	-25.04 dB	-6.77 dB

Peak Gain

2G

Frequency (MHz)	Peak Gain (dBi)
2400	1.55
2410	1.60
2420	1.58
2430	2.01
2440	2.04
2450	2.05
2460	2.42
2470	2.61
2480	2.61
2490	2.63
2500	2.64



5G

Frequency (MHz)	Peak Gain (dBi)	Frequency (MHz)	Peak Gain (dBi)
5150	4.23	5700	2.13
5200	3.90	5750	1.89
5250	3.88	5800	1.52
5300	3.97	5850	1.44
5350	3.74		
5400	1.87		
5450	1.70		
5500	1.83		
5550	2.40		
5600	2.57		
5650	2.83		


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

BTMA0017102G4D1A01

Experimental Setup

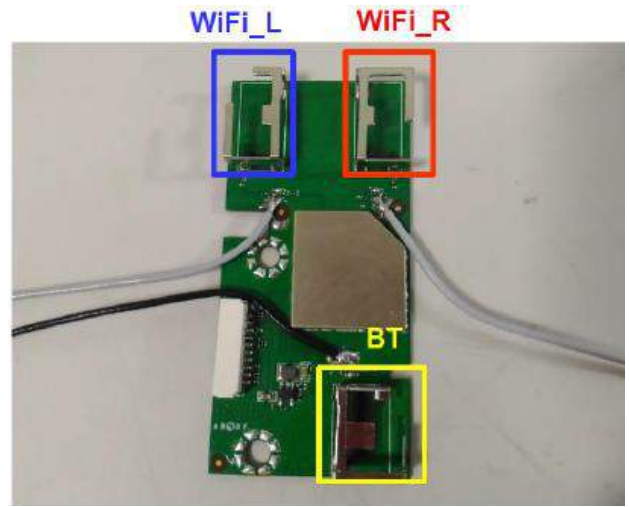
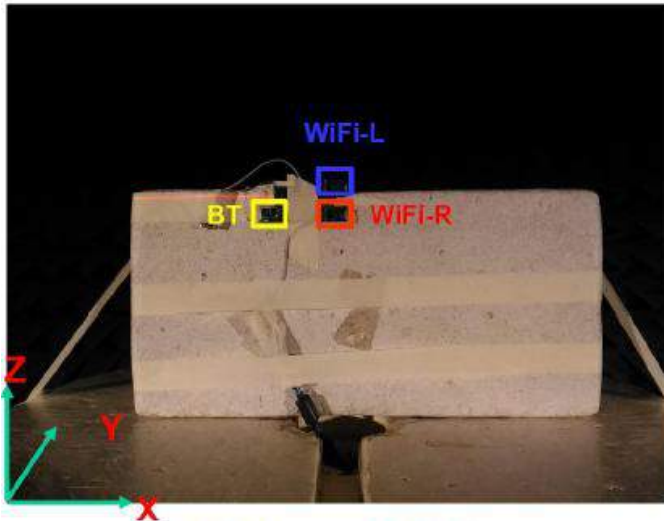


Return Loss S22

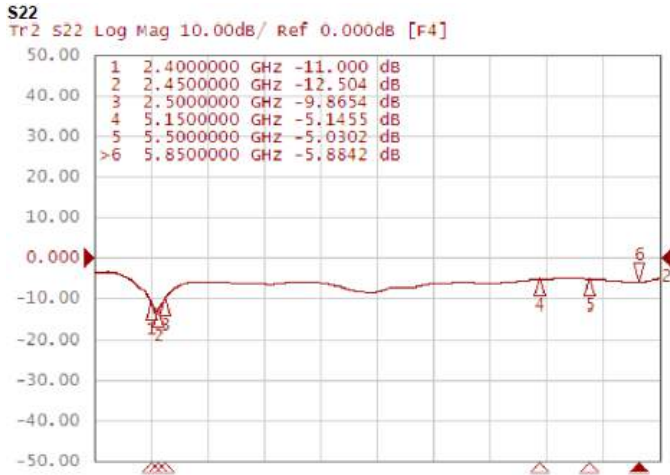

Frequency(MHz) : 2400~2500. Pattern Field : Z-X plane

Frequency(MHz) : 5150~5850. Pattern Field : Z-X plane

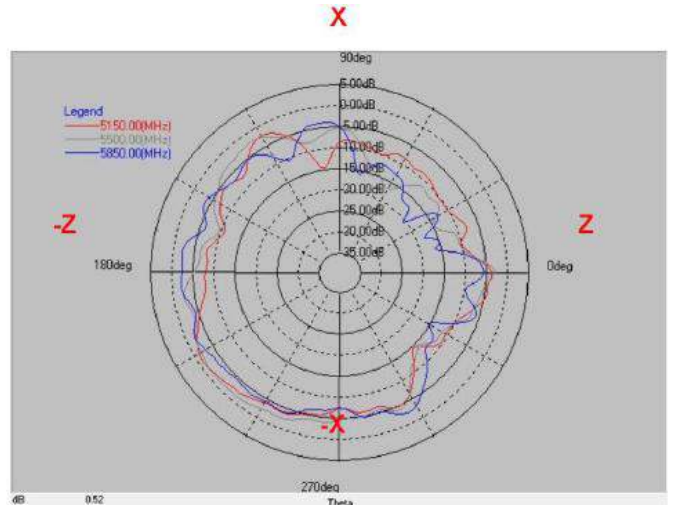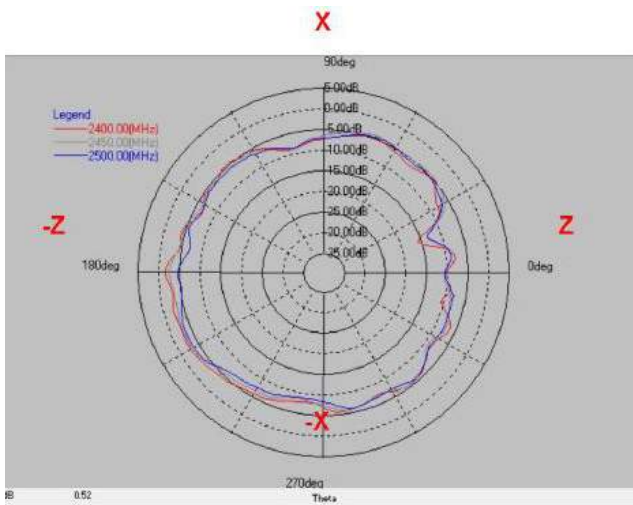


Layer	Max value	Min value	Average
2400(MHz)	-1.36 dB	-15.89 dB	-5.81 dB
2450(MHz)	-2.52 dB	-13.39 dB	-5.91 dB
2400(MHz)	-3.50 dB	-13.23 dB	-6.54 dB

Layer	Max value	Min value	Average
5150(MHz)	-1.08 dB	-14.89 dB	-6.26 dB
5500(MHz)	-1.40 dB	-16.84 dB	-5.41 dB
5850(MHz)	-2.02 dB	-20.60 dB	-6.03 dB

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.


Metal Stamping Antenna BTMA Series

Frequency(MHz) : 2400~2500. Pattern Field : Z-Y plane

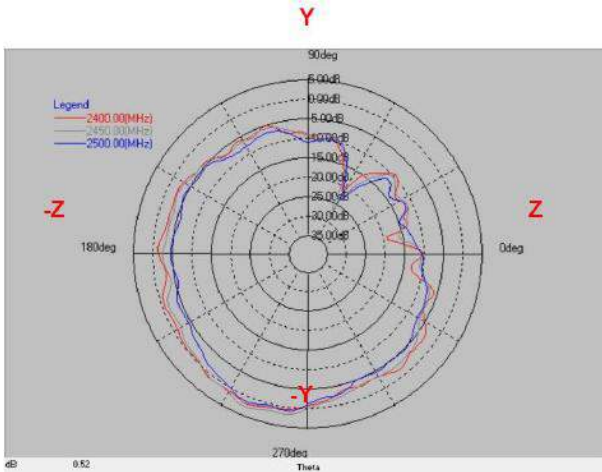


Layer	Max value	Min value	Average
2400(MHz)	1.74 dB	-20.97 dB	-3.49 dB
2450(MHz)	2.68 dB	-27.16 dB	-3.51 dB
2500(MHz)	1.21 dB	-23.67 dB	-4.97 dB

Frequency(MHz) : 5150~5850. Pattern Field : Z-Y plane

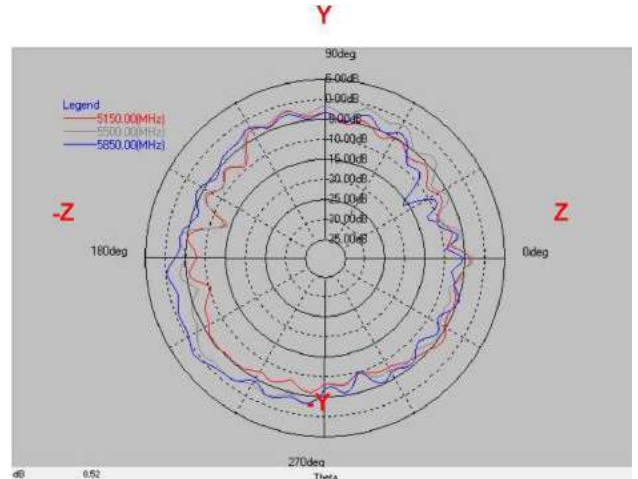


Layer	Max value	Min value	Average
5150(MHz)	-2.12 dB	-13.58 dB	-6.20 dB
5500(MHz)	-1.04 dB	-14.34 dB	-4.49 dB
5850(MHz)	0.77 dB	-16.24 dB	-4.18 dB

Frequency(MHz) : 2400~2500. Pattern Field : X-Y plane

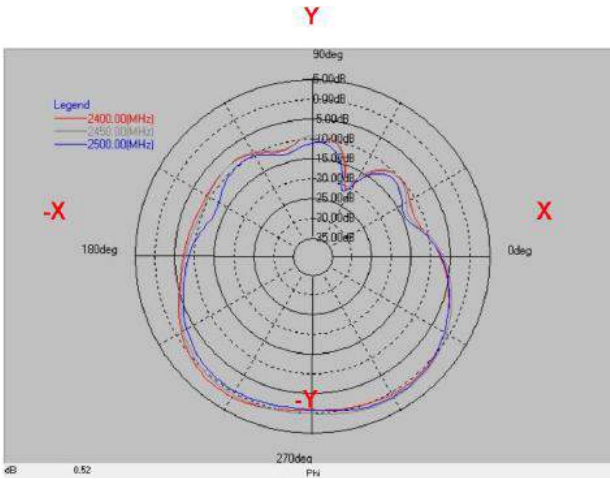

Layer	Max value	Min value	Average
2400(MHz)	1.19 dB	-21.06 dB	-3.46 dB
2450(MHz)	1.42 dB	-20.22 dB	-3.21 dB
2500(MHz)	1.14 dB	-21.85 dB	-4.01 dB


Frequency(MHz) : 5150~5850. Pattern Field : X-Y plane

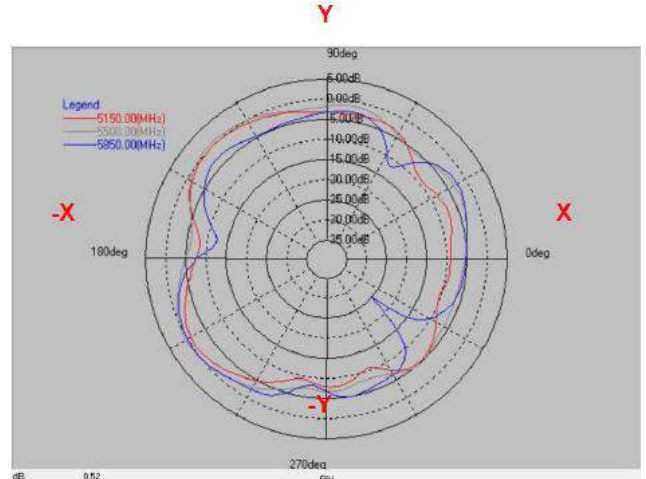

Layer	Max value	Min value	Average
5150(MHz)	-0.15 dB	-10.92 dB	-4.44 dB
5500(MHz)	0.60 dB	-8.28 dB	-2.98 dB
5850(MHz)	0.05 dB	-25.42 dB	-4.39 dB


Peak Gain

2G

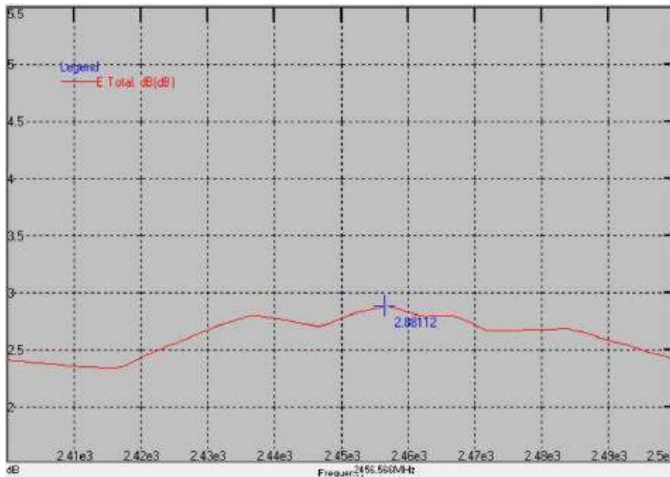

Peak Gain : Max 2.88 dBi

5G


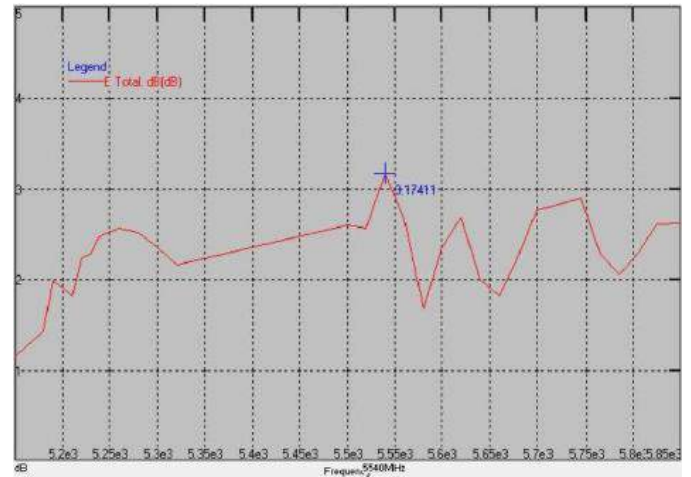


Peak Gain : Max 3.17 dBi


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

BTMA0017102G4D1A02

Experimental Setup

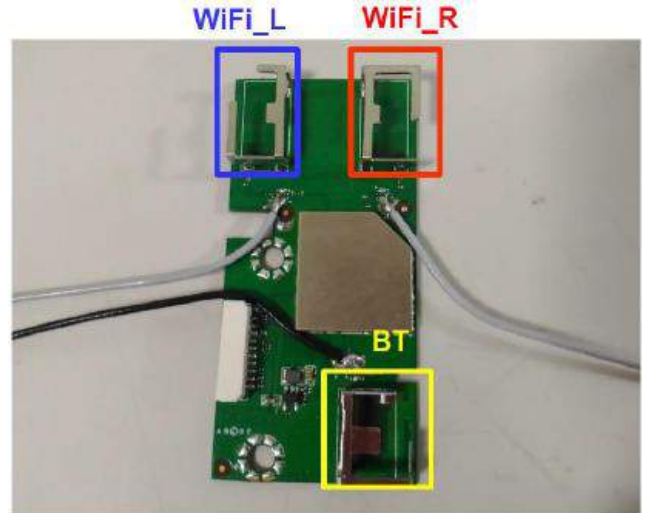
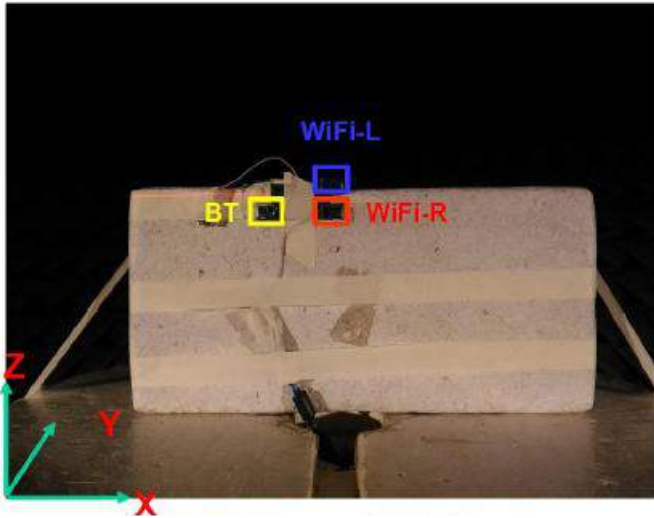


Return Loss S22

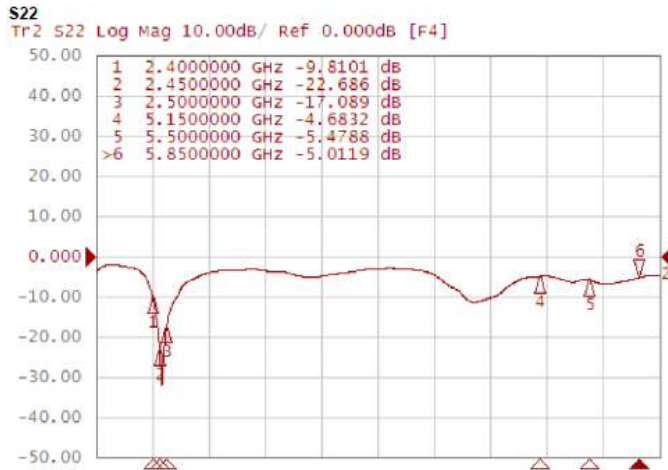

Frequency(MHz) : 2400~2500. Pattern Field : Z-X plane

Frequency(MHz) : 5150~5850. Pattern Field : Z-X plane

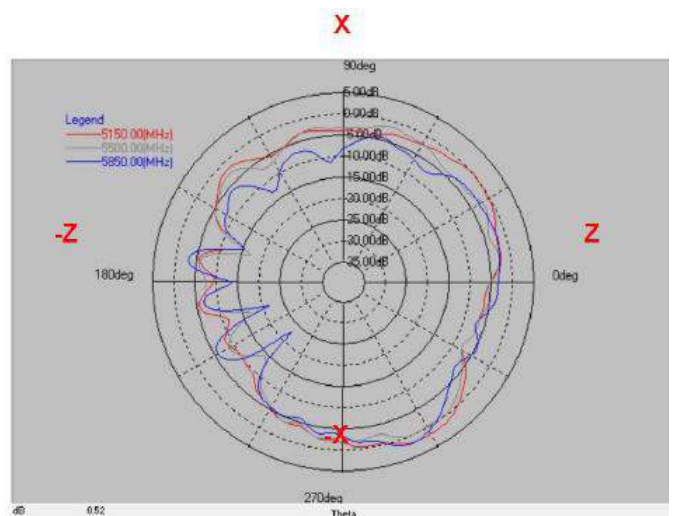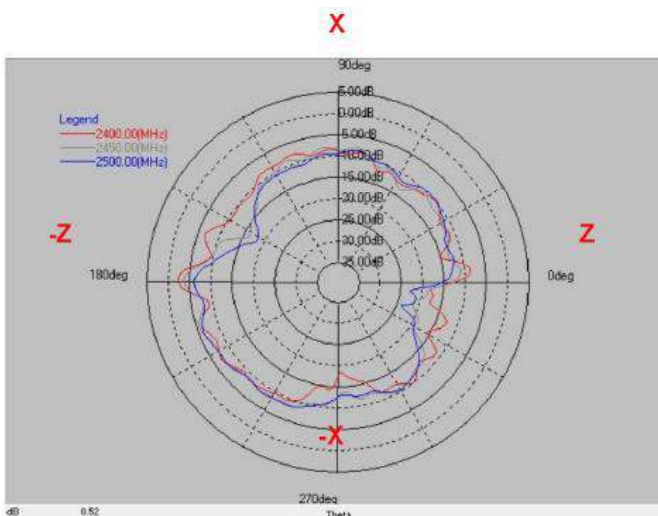


Layer	Max value	Min value	Average
2400(MHz)	-2.23 dB	-18.66 dB	-9.68 dB
2450(MHz)	-3.51 dB	-21.67 dB	-9.99 dB
2400(MHz)	-6.01 dB	-24.11 dB	-10.54 dB

Layer	Max value	Min value	Average
5150(MHz)	1.61 dB	-15.19 dB	-3.16 dB
5500(MHz)	-0.19 dB	-17.15 dB	-4.14 dB
5850(MHz)	1.72 dB	-22.93 dB	-4.75 dB

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.


Metal Stamping Antenna BTMA Series

Frequency(MHz) : 2400~2500. Pattern Field : Z-Y plane

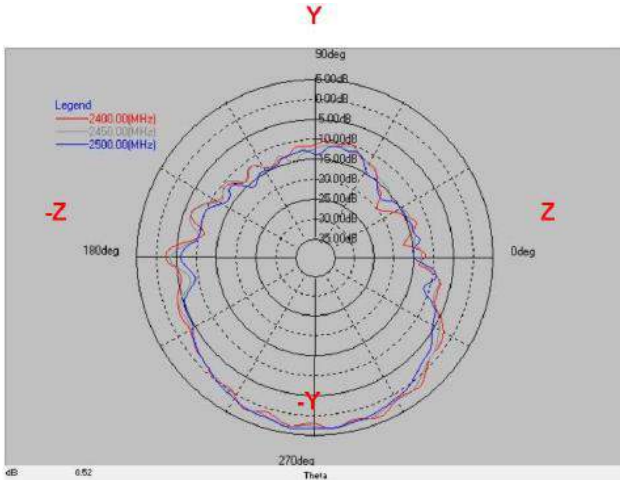


Layer	Max value	Min value	Average
2400(MHz)	3.36 dB	-20.21 dB	-2.86 dB
2450(MHz)	3.14 dB	-15.73 dB	-2.94 dB
2400(MHz)	3.39 dB	-17.57 dB	-3.19 dB

Frequency(MHz) : 5150~5850. Pattern Field : Z-Y plane

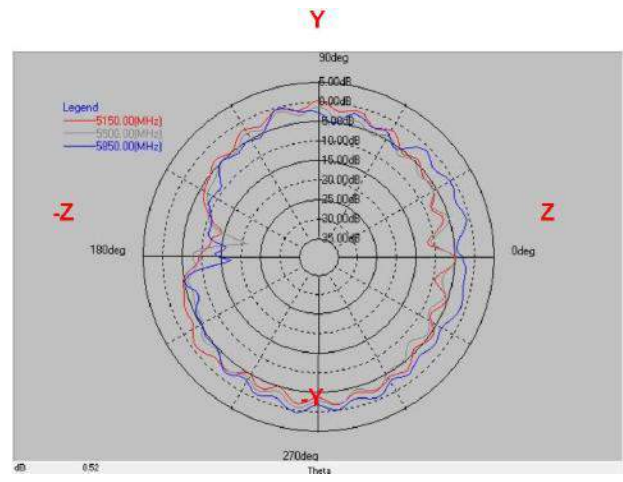


Layer	Max value	Min value	Average
5150(MHz)	0.09 dB	-14.59 dB	-4.02 dB
5500(MHz)	-0.76 dB	-21.21 dB	-4.87 dB
5850(MHz)	0.44 dB	-17.49 dB	-3.22 dB

Frequency(MHz) : 2400~2500. Pattern Field : X-Y plane

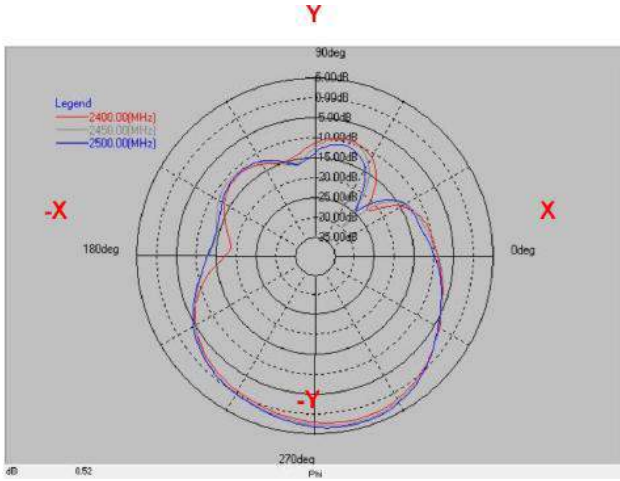

Layer	Max value	Min value	Average
2400(MHz)	2.46 dB	-22.31 dB	-3.81 dB
2450(MHz)	3.20 dB	-29.93 dB	-3.30 dB
2500(MHz)	3.64 dB	-24.60 dB	-3.05 dB


Frequency(MHz) : 5150~5850. Pattern Field : X-Y plane

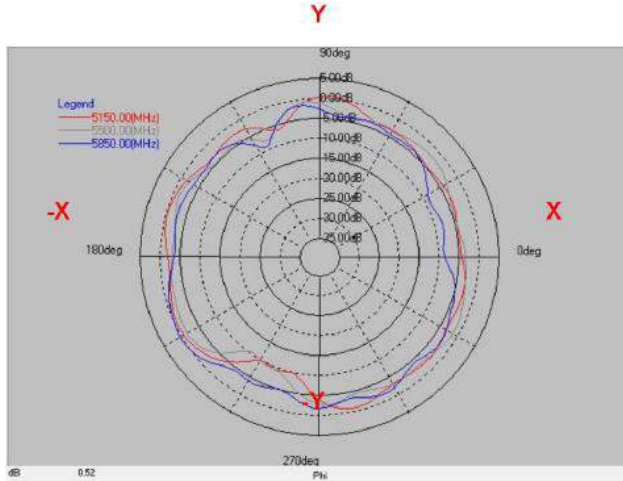

Layer	Max value	Min value	Average
5150(MHz)	0.31 dB	-10.17 dB	-2.80 dB
5500(MHz)	-0.96 dB	-10.79 dB	-3.36 dB
5850(MHz)	0.33 dB	-9.41 dB	-3.55 dB


Peak Gain

2G

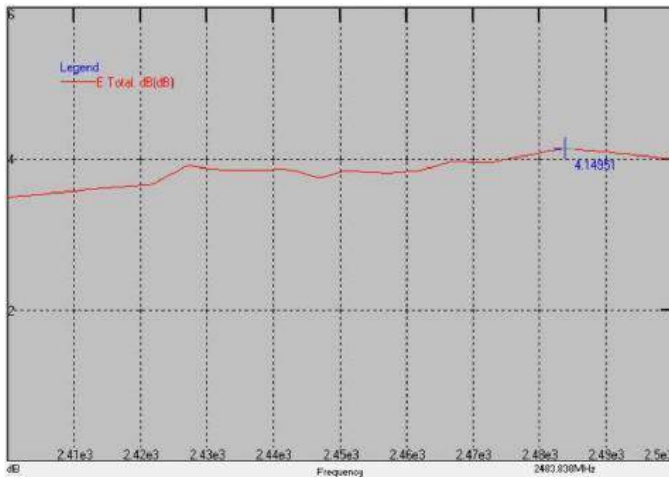

Peak Gain : Max 4.14 dBi

5G

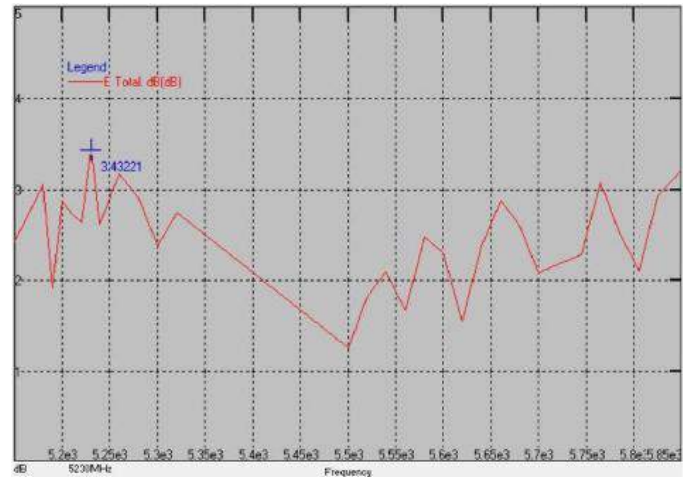

Peak Gain : Max 3.43 dBi

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.


Metal Stamping Antenna BTMA Series

BTMA0027152G4C1A04

Return Loss S11 : 2G Ant 1 → 25G Ant 2




Frequency(MHz) : 2400~2500. Z-X Plane

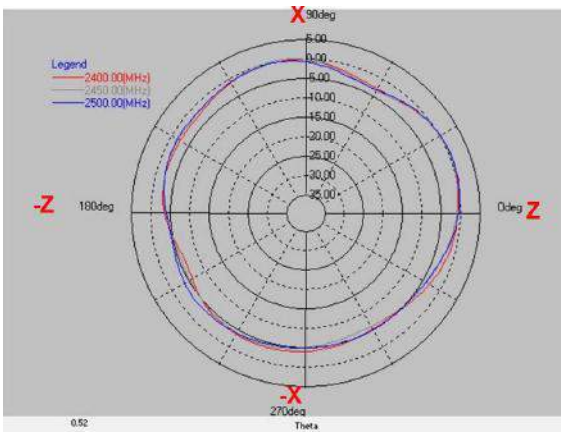


Layer	Max value	Min value	Average
2400(MHz)	0.31 dB	-6.50 dB	-2.43 dB
2450(MHz)	0.22 dB	-6.28 dB	-2.59 dB
2500(MHz)	0.48 dB	-5.27 dB	-2.44 dB

Frequency(MHz) : 2400~2500. Z-Y Plane

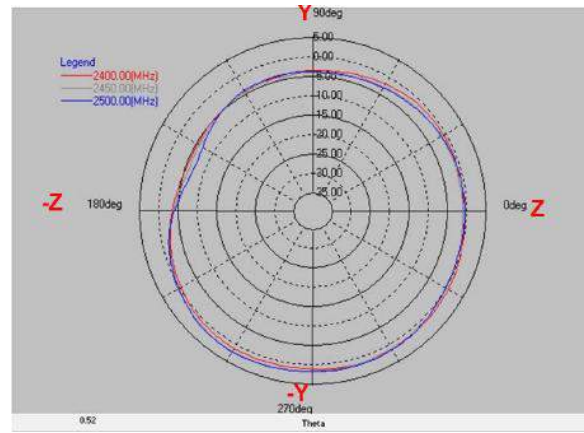


Layer	Max value	Min value	Average
2400(MHz)	1.34 dB	-5.51 dB	-0.89 dB
2450(MHz)	1.91 dB	-6.13 dB	-0.92 dB
2500(MHz)	2.07 dB	-7.38 dB	-0.80 dB

Frequency(MHz) : 2400~2500. X-Y Plane

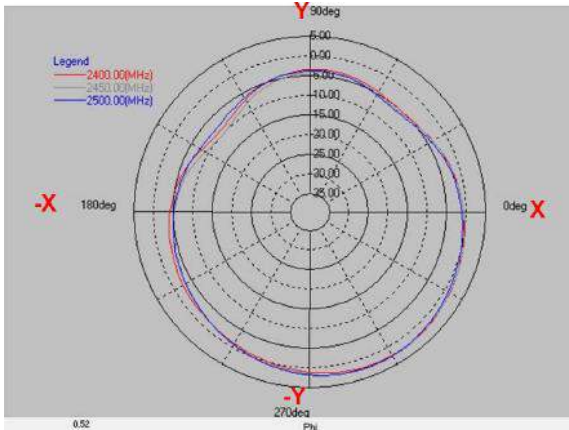

Layer	Max value	Min value	Average
2400(MHz)	2.27 dB	-9.20 dB	-1.54 dB
2450(MHz)	2.60 dB	-10.29 dB	-1.50 dB
2500(MHz)	2.40 dB	-8.04 dB	-1.62 dB

Peak Gain

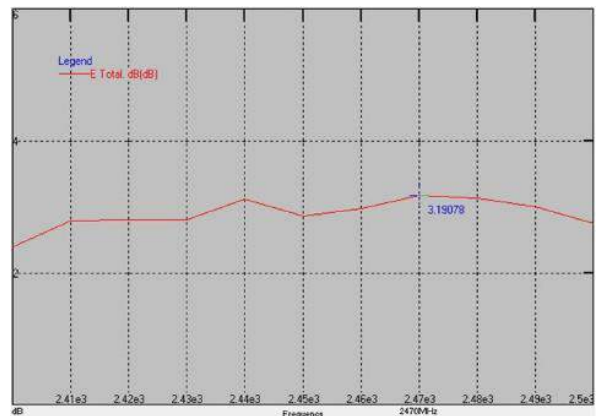



Peak Gain : Max 3.1993.19 dBi

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Metal Stamping Antenna BTMA Series

BTMA00290825GD1A02

Experimental Setup

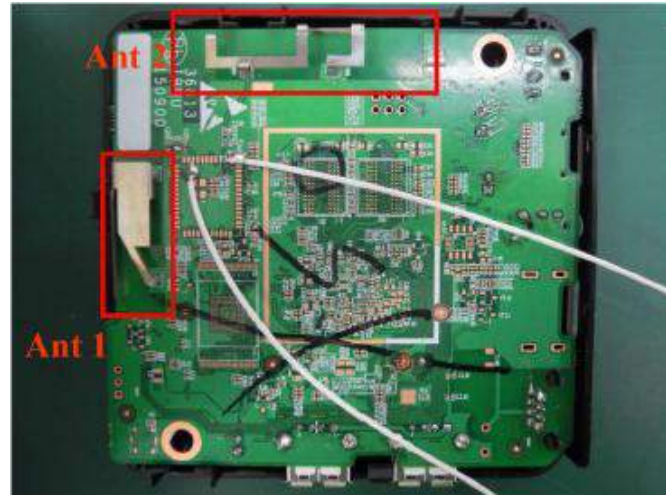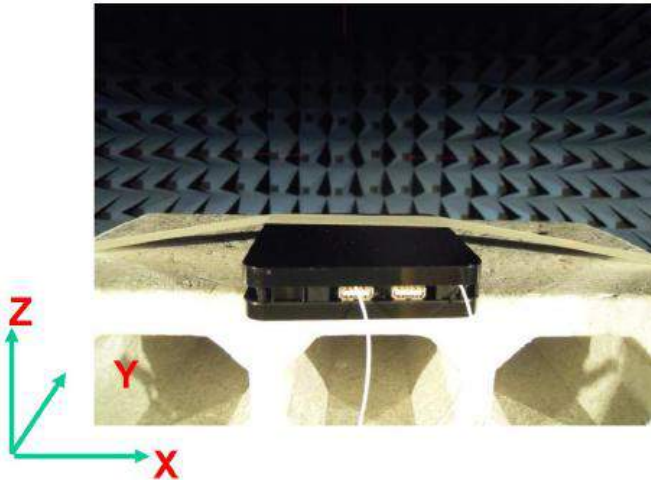


Return Loss Ant 1 → Ant 2



Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.


Metal Stamping Antenna BTMA Series

Frequency(MHz) : 2400~2500. Pattern Field : X-Z plane

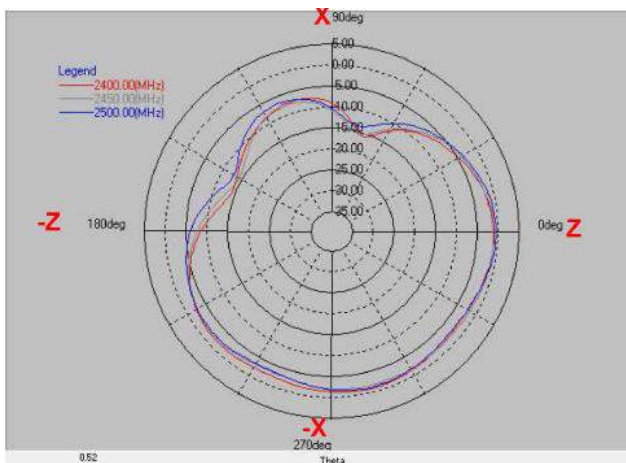


Layer	Max value	Min value	Average
2400(MHz)	-0.89 dB	-16.13 dB	-3.98 dB
2450(MHz)	-1.06 dB	-15.91 dB	-4.19 dB
2500(MHz)	-0.51 dB	-11.13 dB	-3.95 dB

Frequency(MHz) : 2400~2500. Pattern Field : Y-Z plane

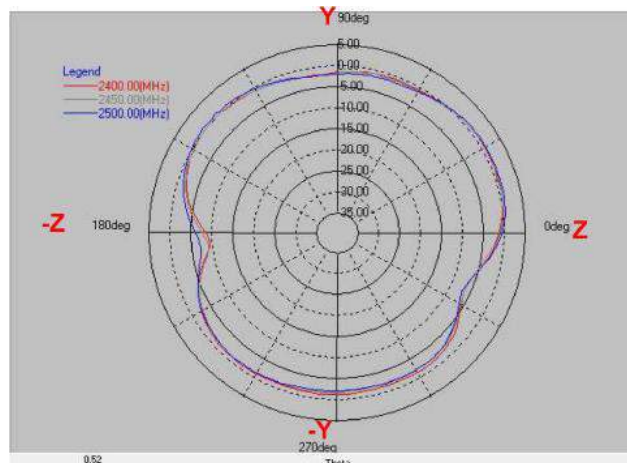


Layer	Max value	Min value	Average
2400(MHz)	0.76 dB	-9.47 dB	-1.56 dB
2450(MHz)	0.94 dB	-9.03 dB	-1.73 dB
2500(MHz)	1.04 dB	-7.20 dB	-1.56 dB

Frequency(MHz) : 2400~2500. Pattern Field : X-Y plane

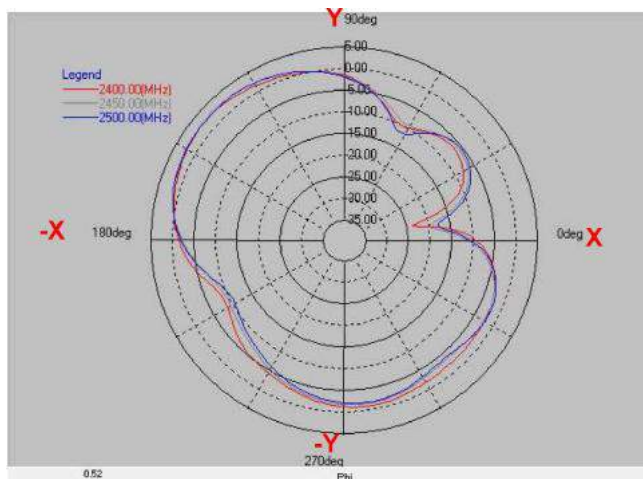


Layer	Max value	Min value	Average
2400(MHz)	2.47 dB	-23.81 dB	-2.21 dB
2450(MHz)	2.71 dB	-19.78 dB	-2.28 dB
2500(MHz)	2.55 dB	-17.95 dB	-2.40 dB

Frequency(MHz) : 5150~5850. Pattern Field : Z-X plane

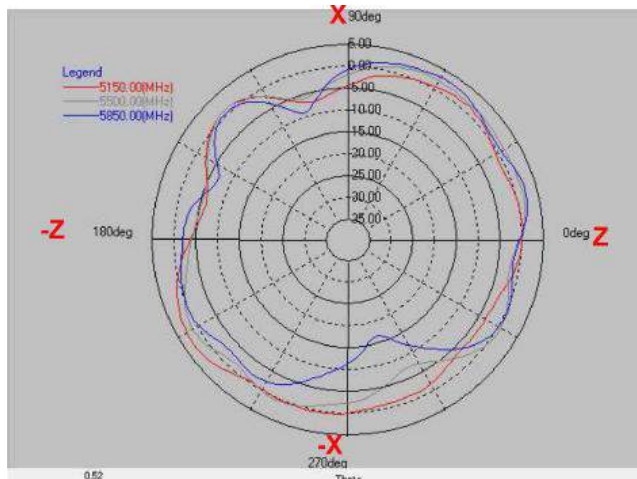


Layer	Max value	Min value	Average
5150(MHz)	2.83 dB	-7.47 dB	-0.79 dB
5500(MHz)	2.08 dB	-7.55 dB	-0.73 dB
5850(MHz)	3.02 dB	-16.98 dB	-1.22 dB

Frequency(MHz) : 5150~5850. Pattern Field : Z-Y plane

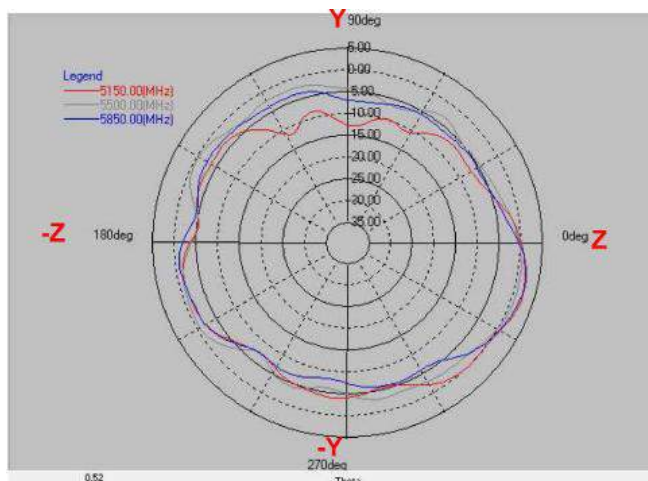

Layer	Max value	Min value	Average
5150(MHz)	2.33 dB	-13.06 dB	-3.37 dB
5500(MHz)	0.82 dB	-7.57 dB	-2.62 dB
5850(MHz)	2.27 dB	-8.44 dB	-3.28 dB

Frequency(MHz) : 5150~5850. Pattern Field : X-Y plane

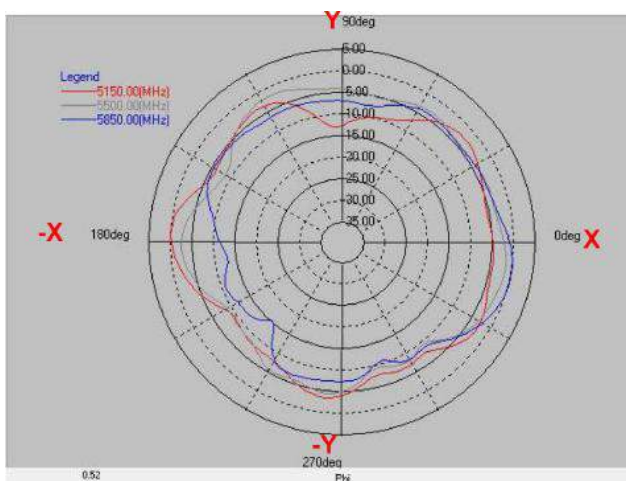

Layer	Max value	Min value	Average
5150(MHz)	-0.04 dB	-13.16 dB	-4.88 dB
5500(MHz)	-1.42 dB	-9.61 dB	-4.62 dB
5850(MHz)	0.25 dB	-15.48 dB	-5.55 dB

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.