

SAW Filter 460 MHz

MODEL NO.: TA0312A

REV. NO.:3.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dB_m
2. DC voltage: 3 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitivity Level: Level 1 (MSL1)

RoHS Compliant
Lead free
Lead-free soldering


Electrostatic Sensitive Device

B. ELECTRICAL CHARACTERISTICS:



| Item | Unit | Min. | Type. | Max. | |
|---|------|------|-------|------|---|
| Center frequency Fc | MHz | - | 460 | - | |
| Insertion Loss IL _{min} (reference level) | dB | - | 1.5 | 3.0 | |
| 1dB Bandwidth BW _{-1dB} | MHz | - | 21.6 | - | |
| 3dB Bandwidth BW _{-3dB} | MHz | 20 | 24.5 | - | |
| Absolute Attenuation:(Reference level from 0dB) | | | | | |
| F _c -40.8 to F _c -100 | MHz | dB | 42 | 57 | - |
| F _c +40 to F _c +100 | MHz | dB | 40 | 46 | - |
| Source impedance Z _s | Ω | - | 50 | - | |
| Load impedance Z _L | Ω | - | 50 | - | |

Note: IL_{min} is the minimum of the pass band attenuation. The center frequency F_c is the mean value of the upper and lower frequencies at the 3dB filter attenuation level relative to the IL_{min}.

C. Frequency Characteristics :

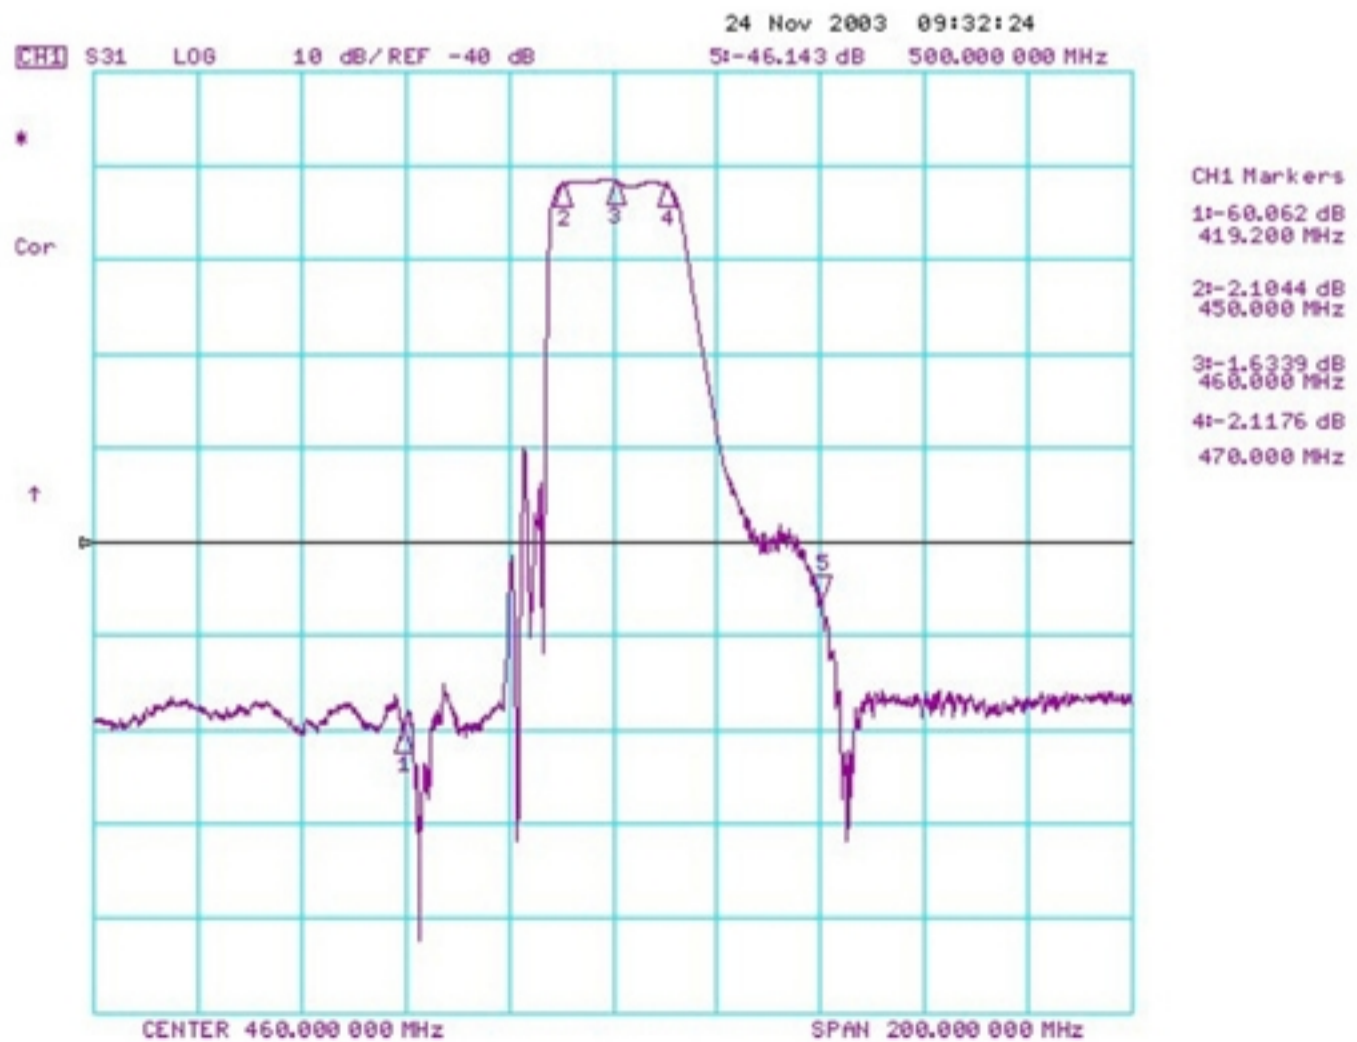

D. OUTLINE DRAWING:

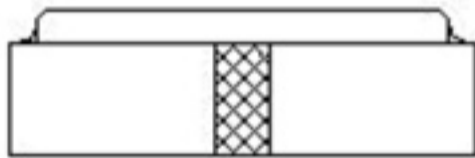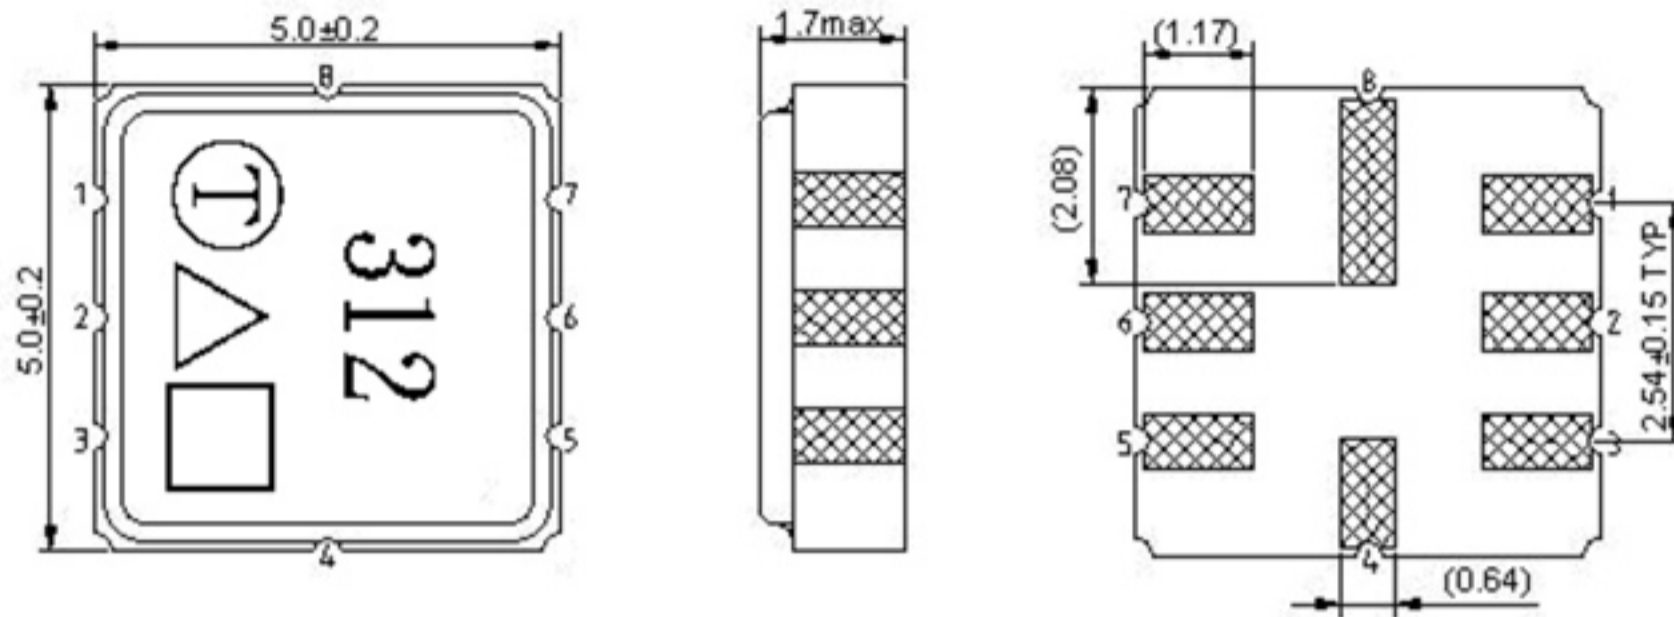

- #2 : Input
- #6 : Output
- #1、3、4、5、7、8 : Ground
- △ : Year code
- : Date code
- Unit : mm

Product / Year Code- 4year cycle

| Year | 2017 2021 | 2018 2022 | 2019 2023 | 2020 2024 |
|--------------|--------------|--------------|--------------|--------------|
| Product Code | A | a | <u>A</u> | <u>a</u> |

Week Code Table


| | | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|------|
| WK01 | WK02 | WK03 | WK04 | WK05 | WK06 | WK07 | WK08 | WK09 | WK10 | WK11 | WK12 | WK13 |
| A | B | C | D | E | F | G | H | I | J | K | L | M |
| WK14 | WK15 | WK16 | WK17 | WK18 | WK19 | WK20 | WK21 | WK22 | WK23 | WK24 | WK25 | WK26 |
| N | O | P | Q | R | S | T | U | V | W | X | Y | Z |
| WK27 | WK28 | WK29 | WK30 | WK31 | WK32 | WK33 | WK34 | WK35 | WK36 | WK37 | WK38 | WK39 |
| a | b | c | d | e | f | g | h | i | j | k | l | m |
| WK40 | WK41 | WK42 | WK43 | WK44 | WK45 | WK46 | WK47 | WK48 | WK49 | WK50 | WK51 | WK52 |
| n | o | p | q | r | s | t | u | v | w | x | y | z |

E. MEASUREMENT CIRCUIT:

HP Network analyzer




F. PCB FOOTPRINT:

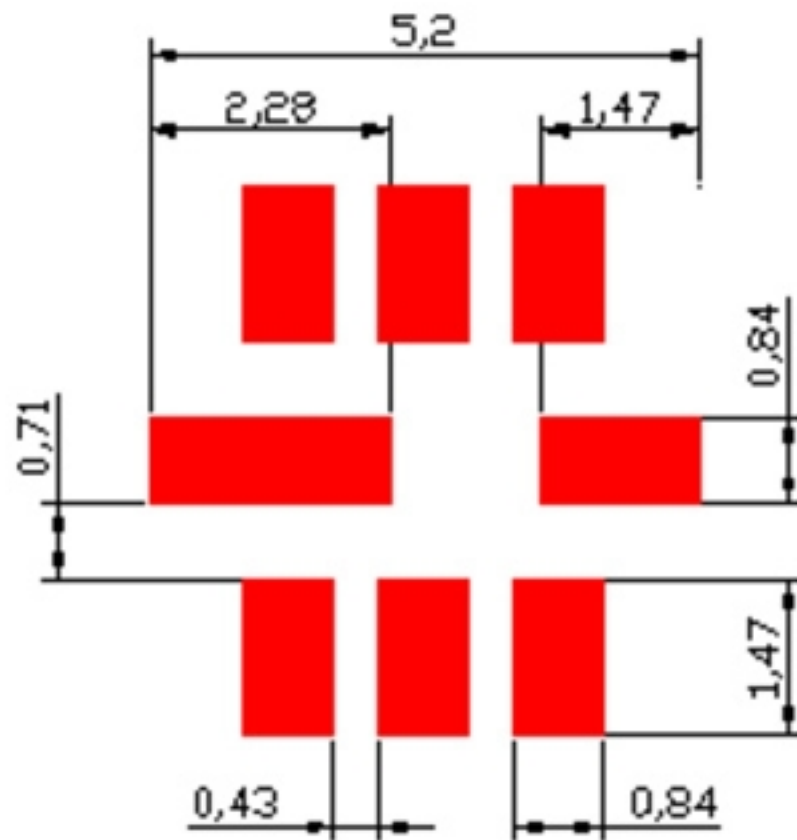


G. PACKING:

1. REEL DIMENSION

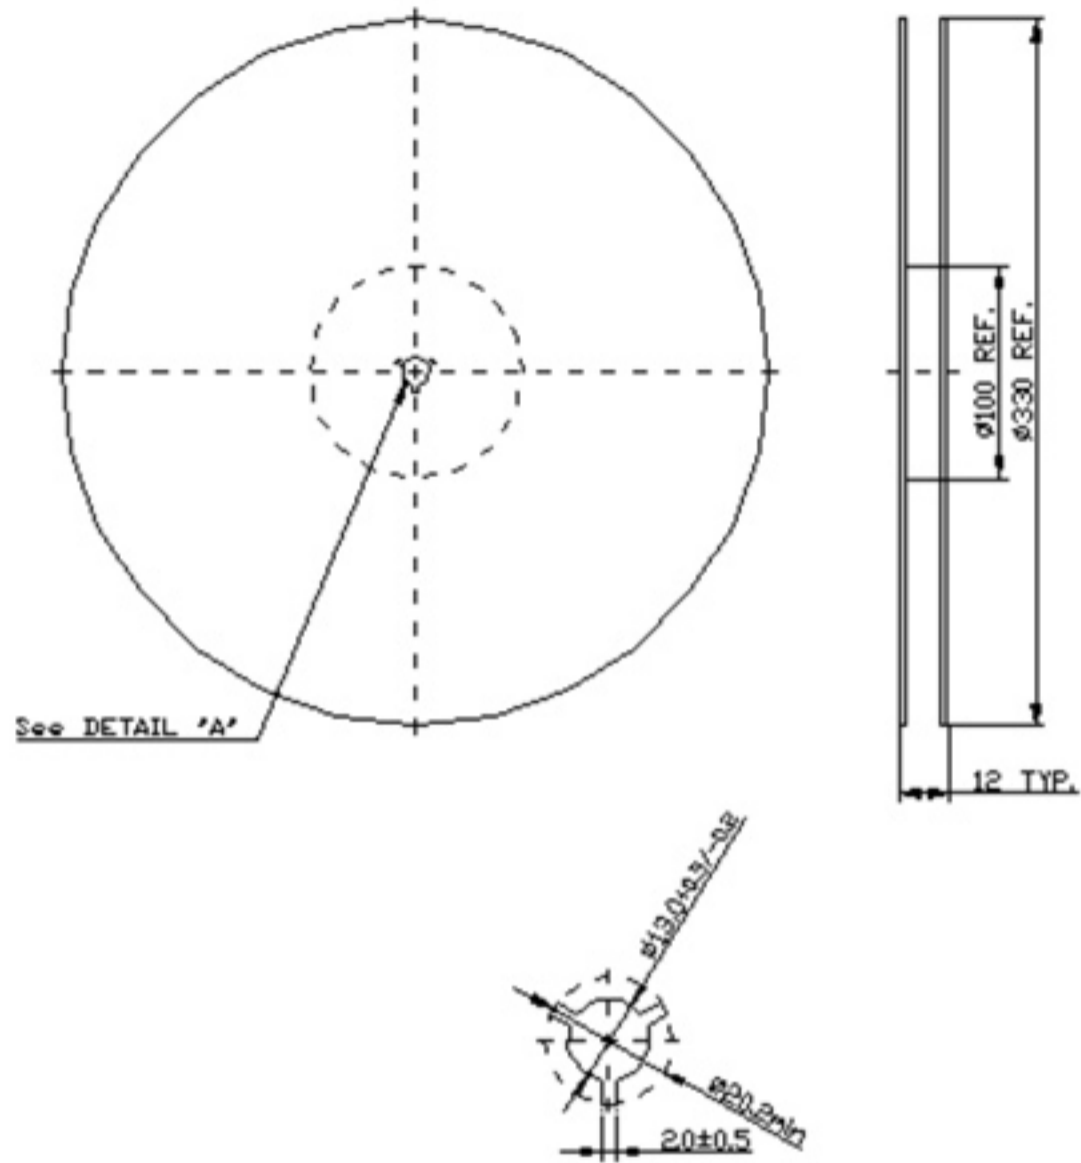

2. TAPE DIMENSION

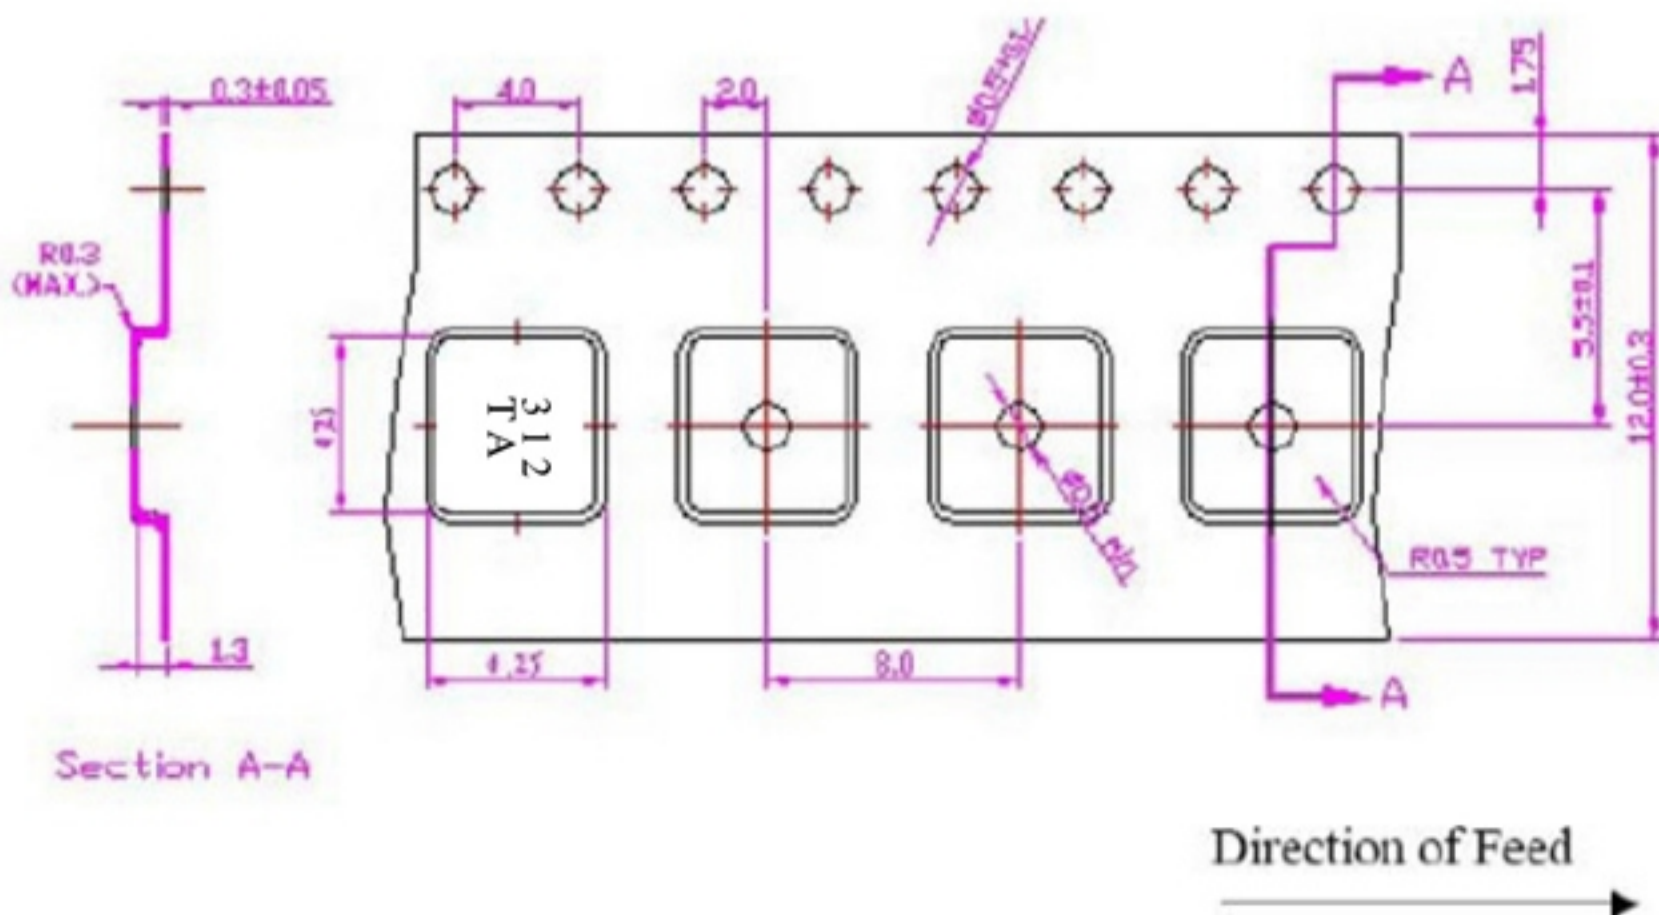

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

