


SAW Filter 428 MHz

MODEL NO.:TA1589A

REV. NO.:2.0

A. MAXIMUM RATING:

1. Input Power Level: 15 dBm
2. DC Voltage : 3 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitivity Level: Level 1(MSL1)

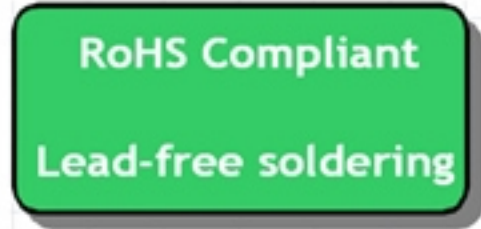


Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Type.	Max.	
Center frequency Fc	MHz	-	428	-	
Insertion Loss (426~430 MHz) IL	dB	-	1.8	3.5	
Amplitude Ripple (426~430 MHz)	dB	-	0.2	1.8	
VSWR (426~430 MHz)	-	-	1.3	2.4	
Attenuation (Reference level from 0 dB)					
10 ~ 400 MHz	dB	55	70	-	
400 ~ 415 MHz	dB	45	59	-	
445 ~ 455 MHz	dB	30	42	-	
455 ~ 810 MHz	dB	50	59	-	
810 ~ 1000 MHz	dB	45	58	-	
Temperature coefficient of frequency	ppm/°C	-	-36	-	

C. MEASUREMENT CIRCUIT:

HP Network analyzer

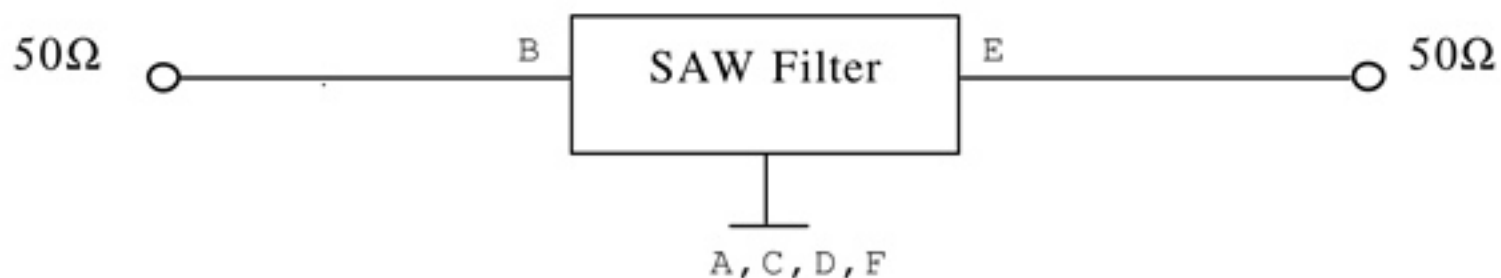

D. OUTLINE DRAWING:

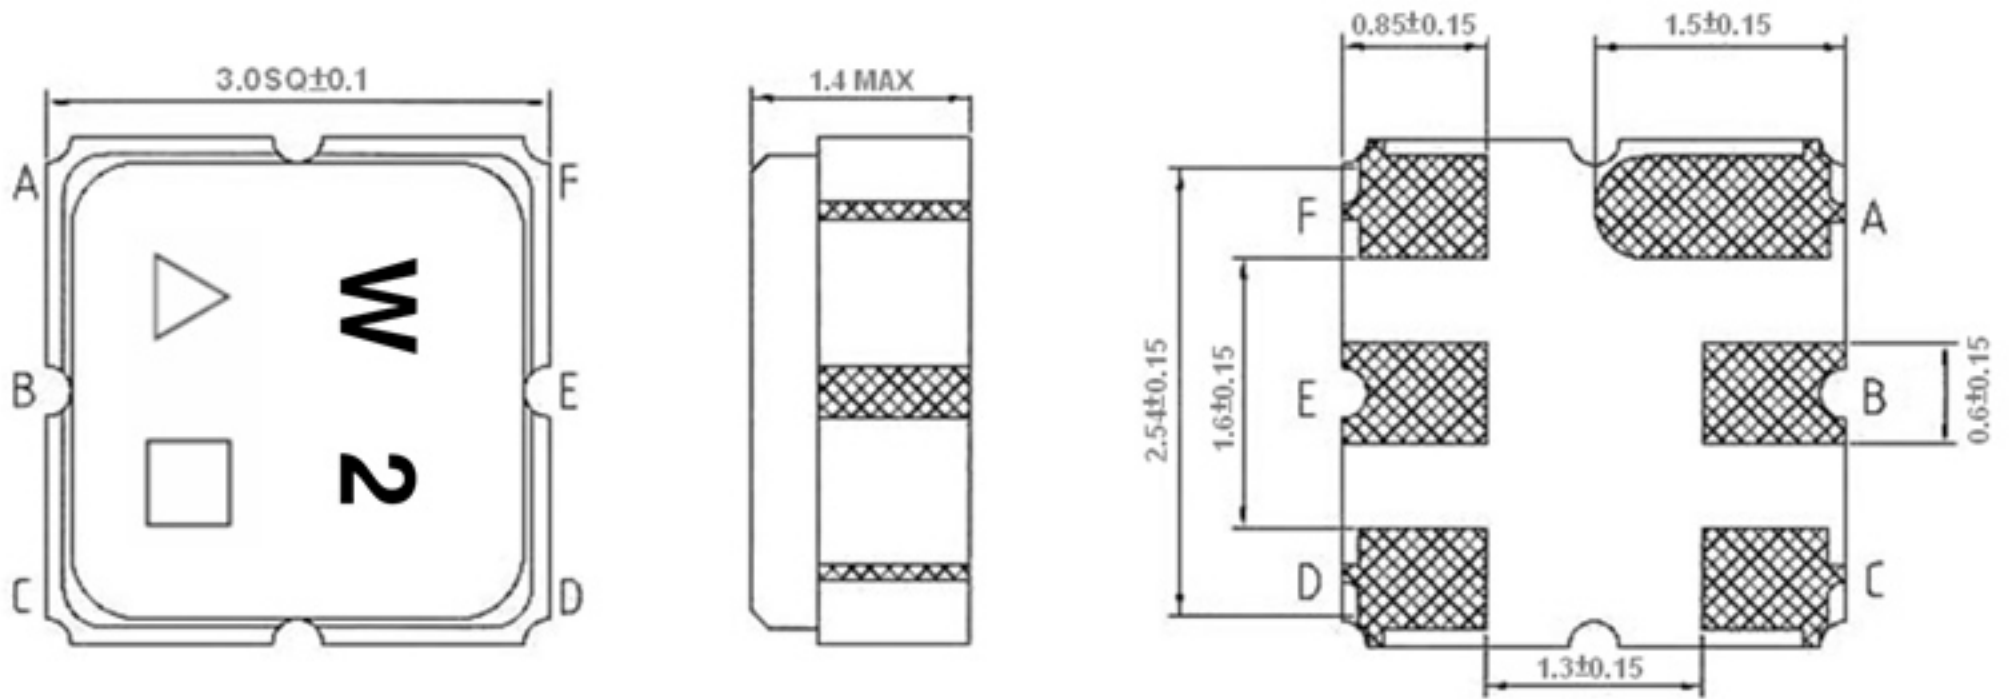

B: Input

E: Output

A, C, D, F: Ground

Unit: mm


△ : Year Code (2011->1, 2012->2, ..., 2019->9, 2020->0)

□ : Date Code



Date Code Table:

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

E. PCB Footprint:

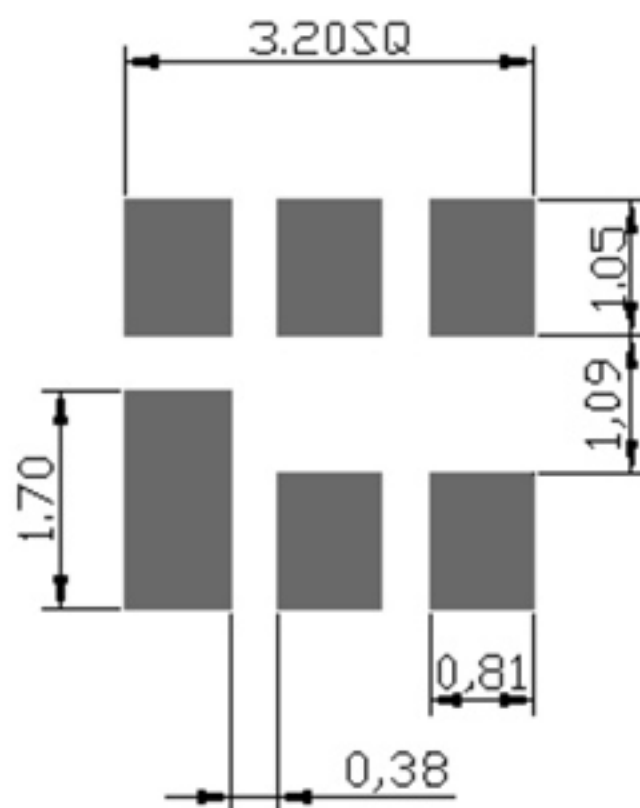


F. Frequency Characteristics:

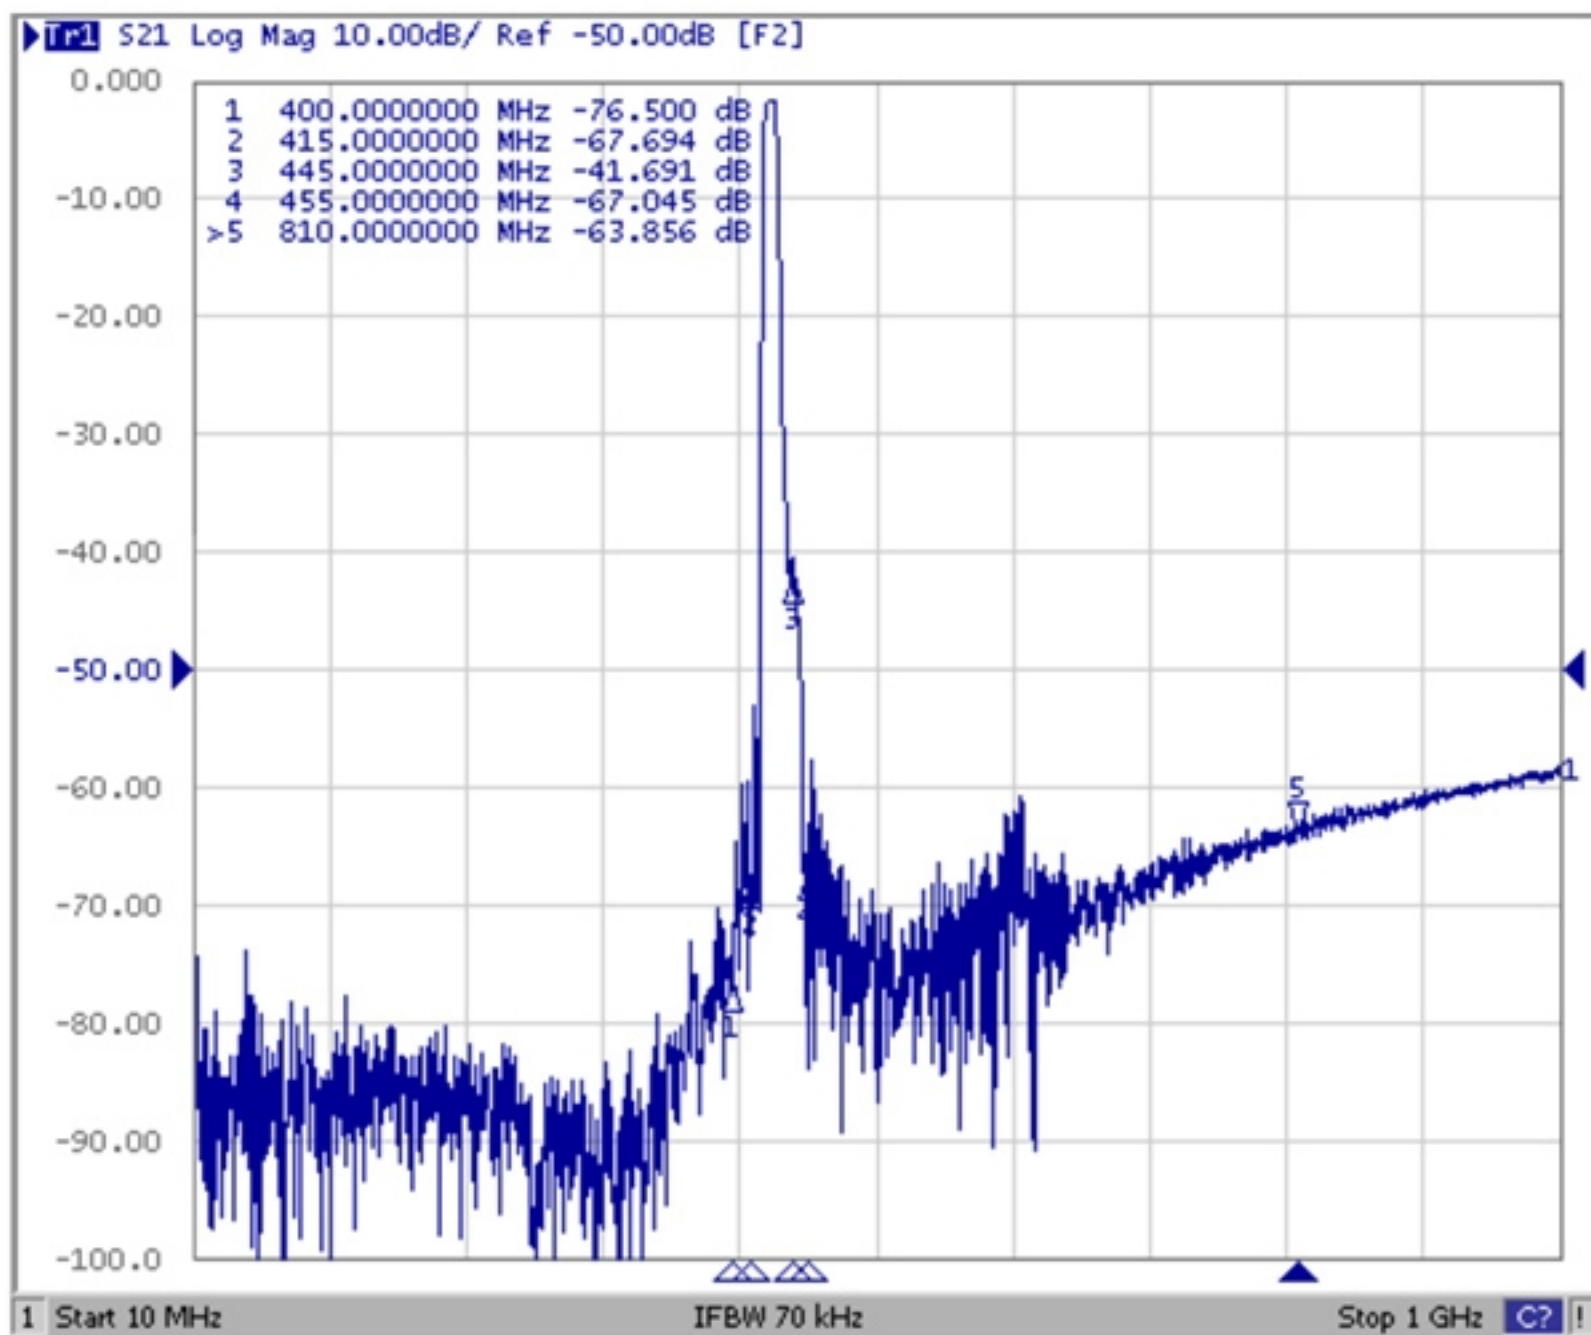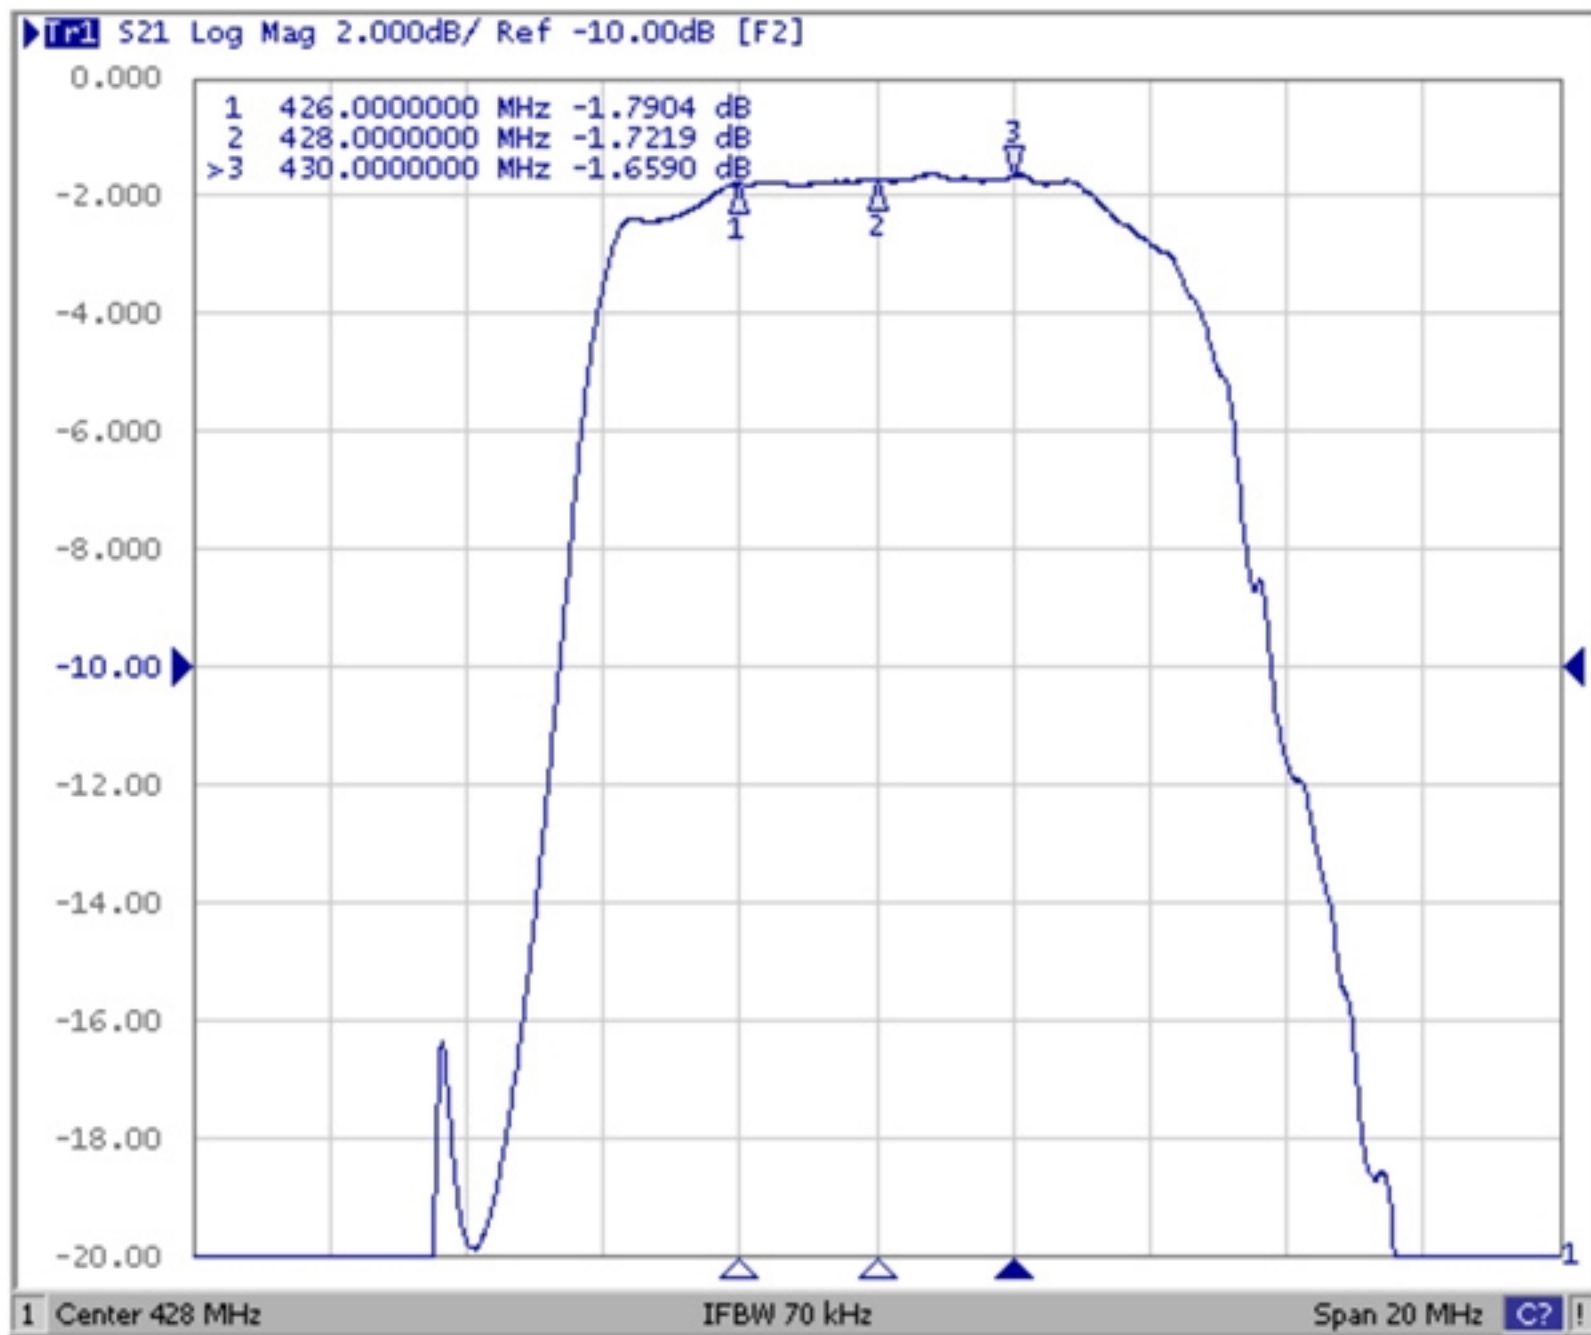


Reflection Functions:

S11

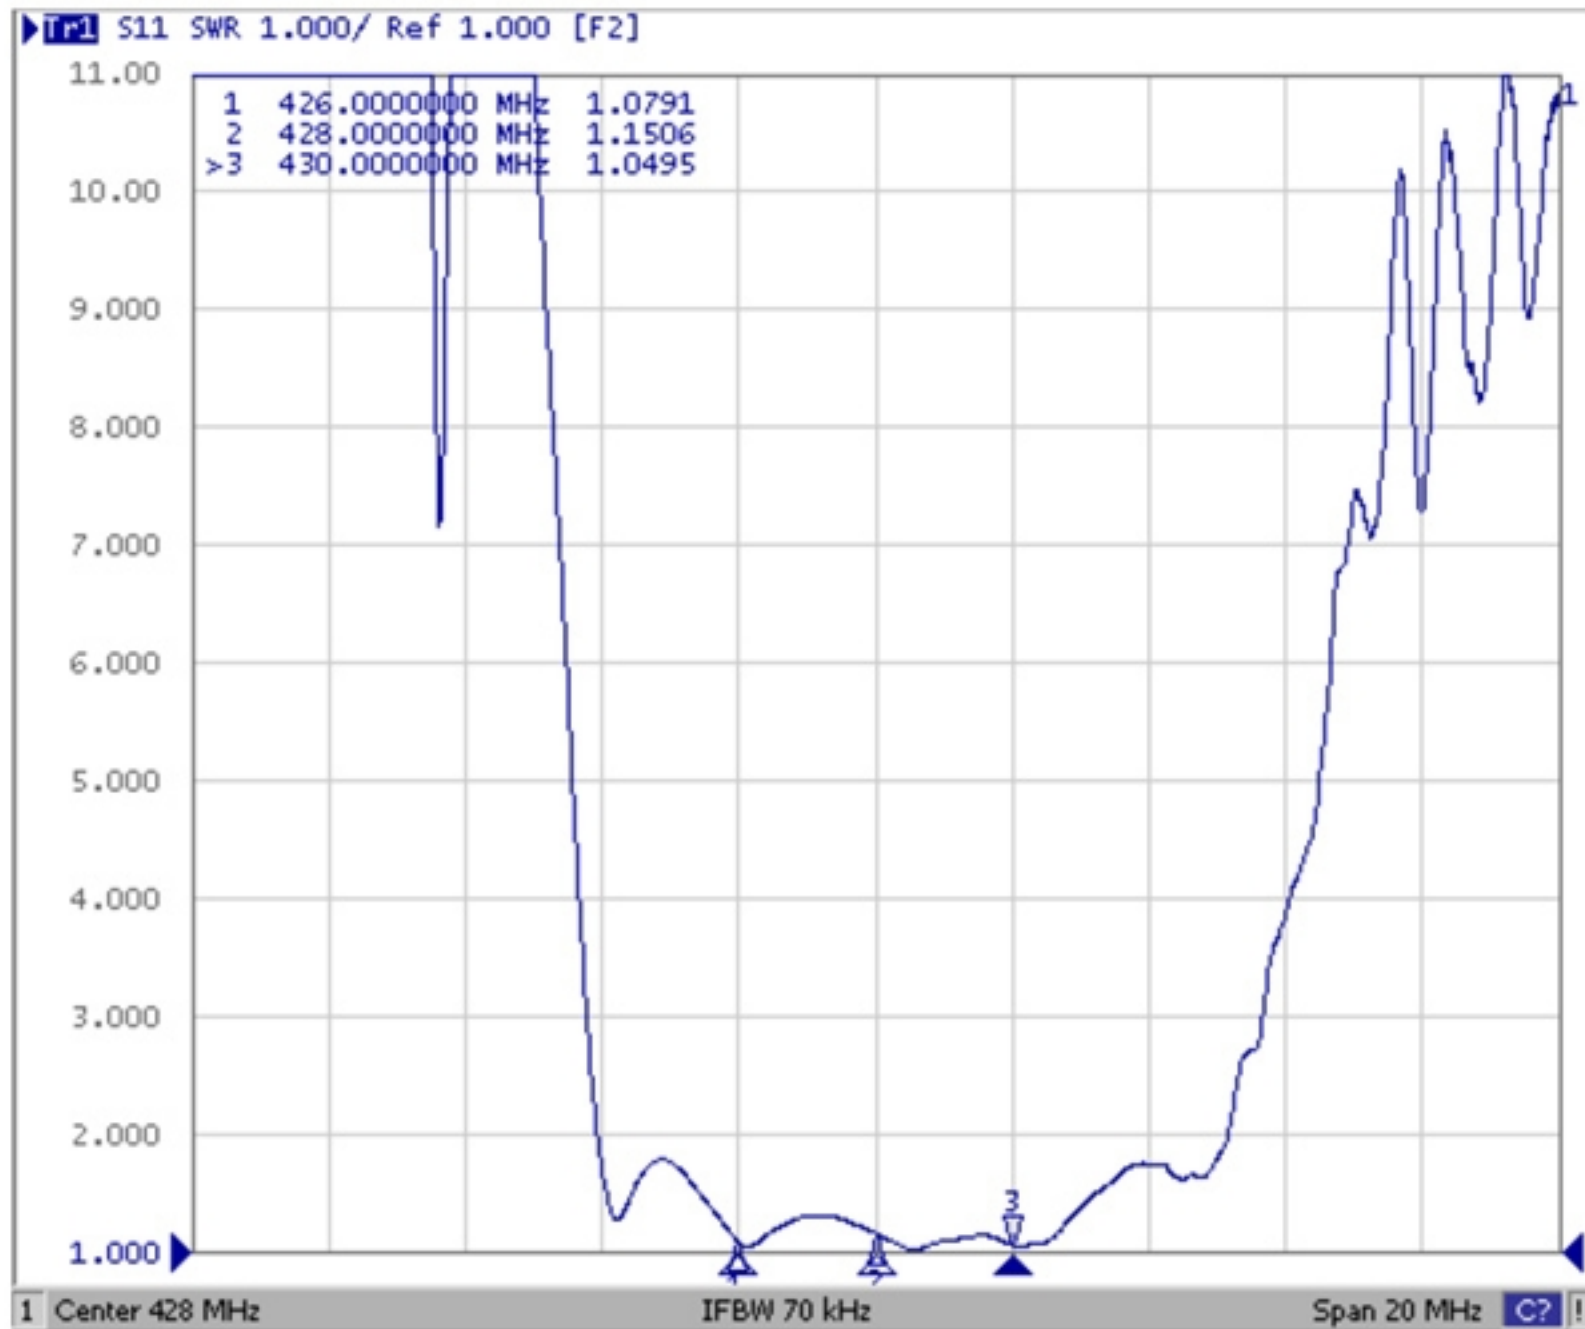


S22

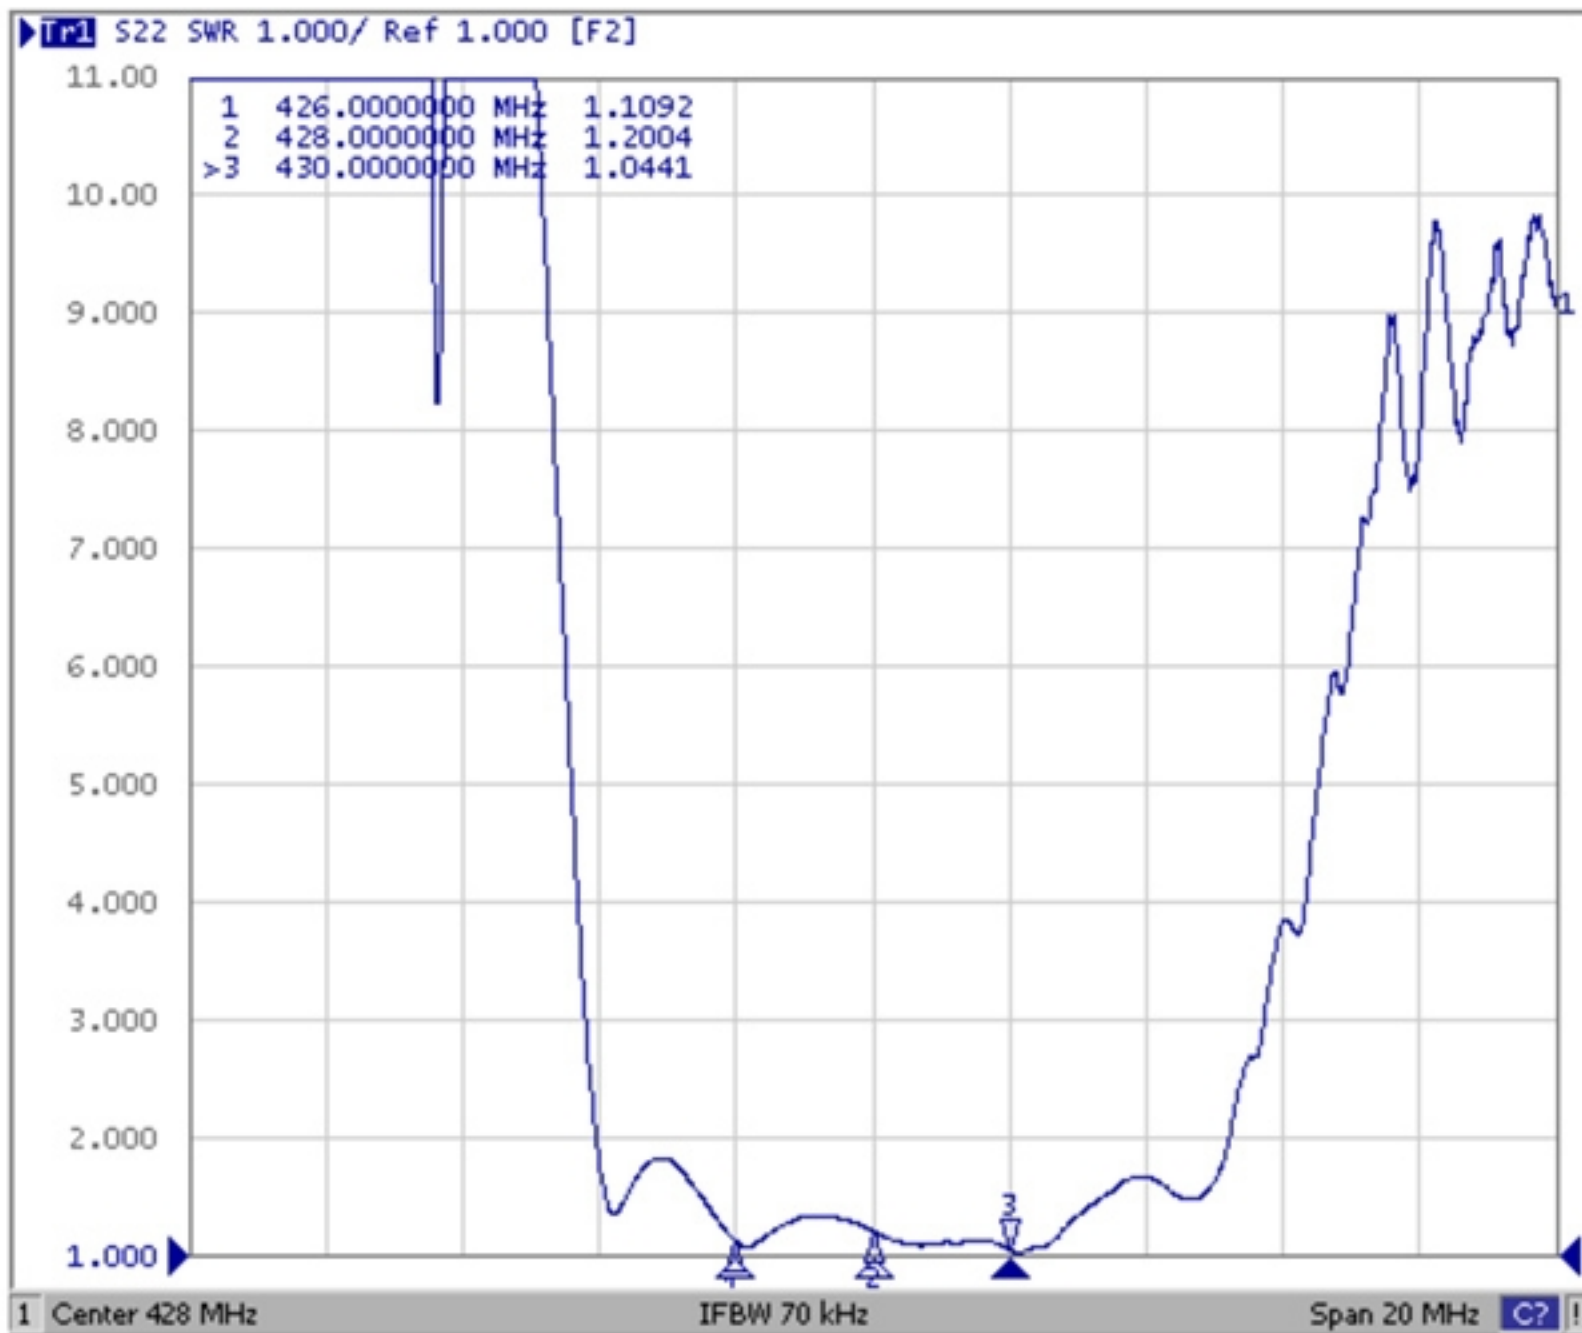


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

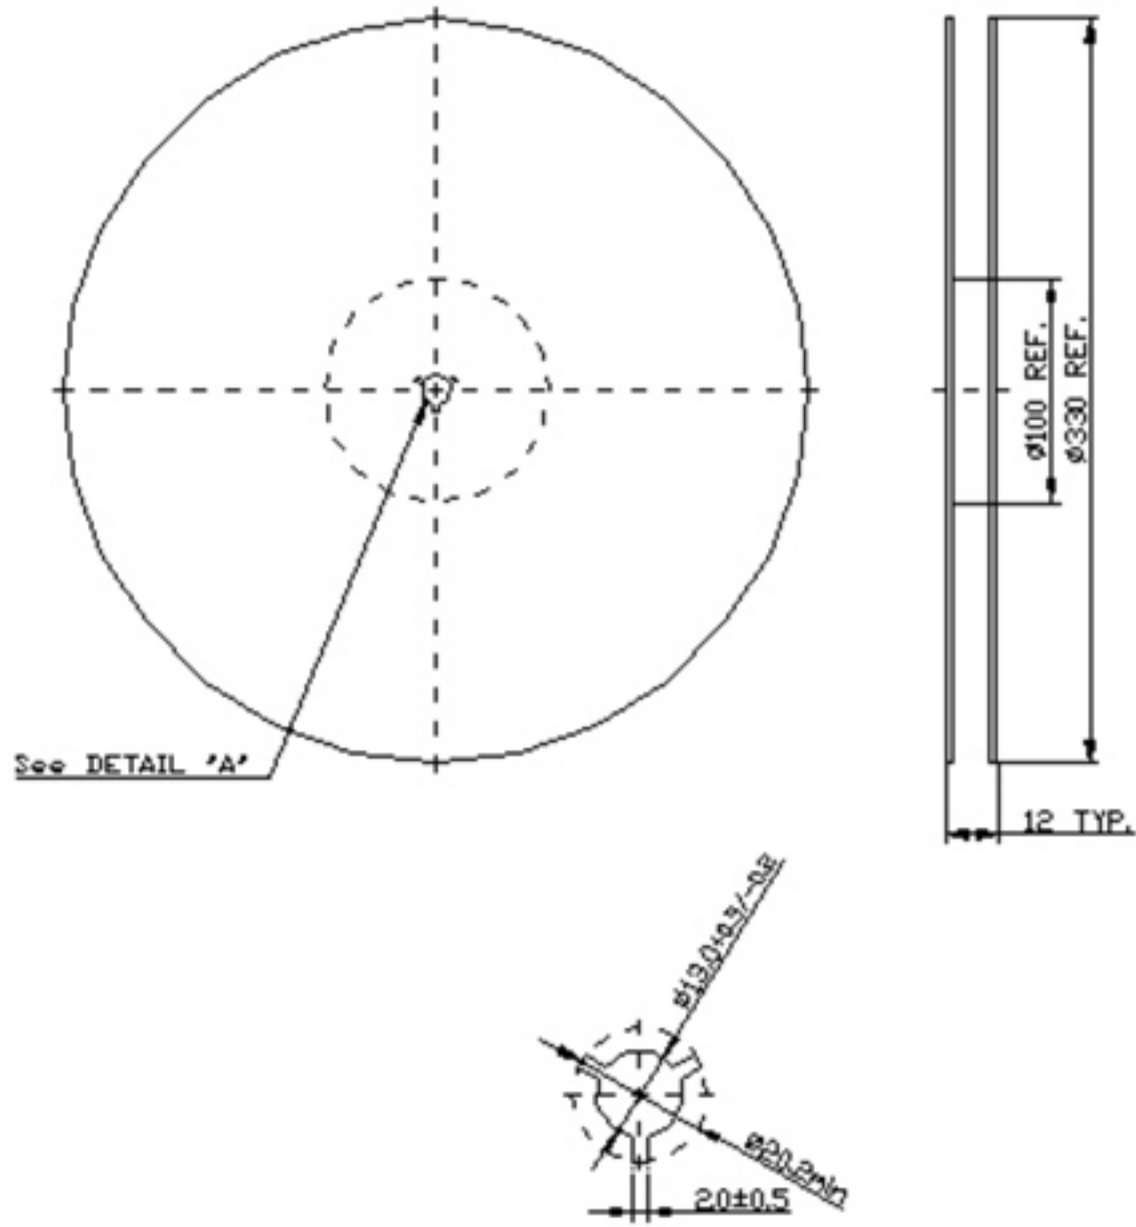

2. TAPE DIMENSION

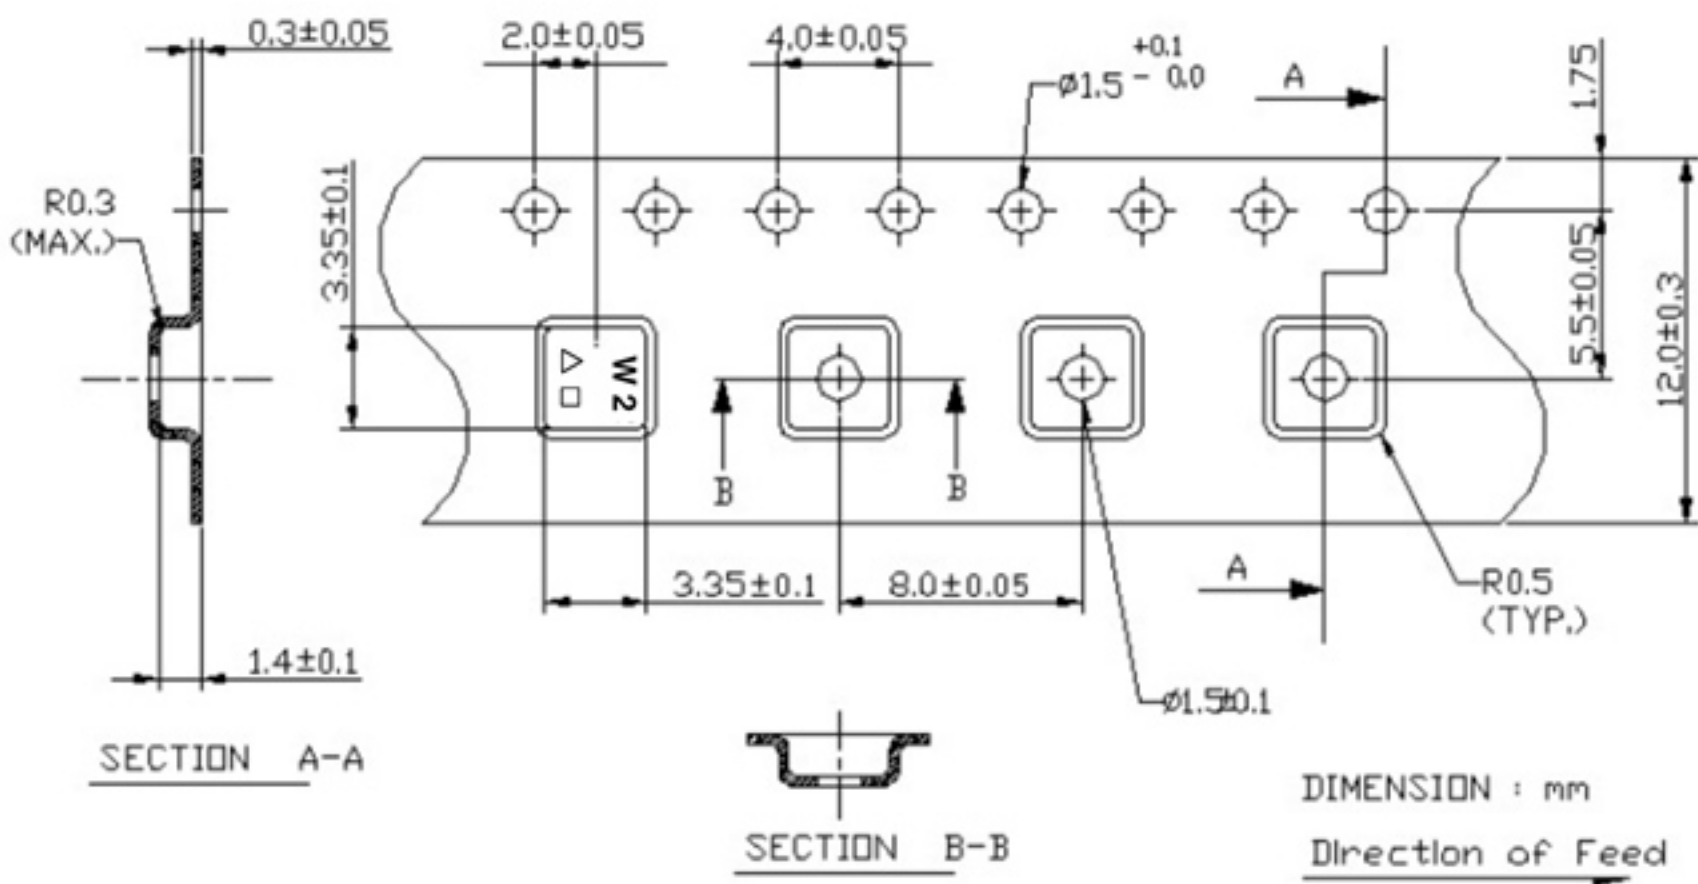

H. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 250 10°C peak (max. 10sec).
4. Time: 2 times.

