

# SAW Filter 869.5 MHz

MODEL NO.: TA1868B

REV. NO.:1

## A. MAXIMUM RATING:

1. Input Power Level: 10 dB<sub>m</sub>
2. DC voltage: 3 V
3. Operating Temperature: -40°C to 85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitivity Level: Level 1(MSL1)




Electrostatic Sensitive Device (ESD)

## B. CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.	
Center frequency <b>Fc</b>	MHz	-	869.5	-	
Insertion loss (863~876 MHz) <b>IL</b>	dB	-	2.5	3.5	
Amplitude ripple (863~876 MHz)	dB	-	0.8	1.5	
VSWR (863~876 MHz)	-	-	1.6	2.0	
<b>Attenuation</b> (reference from 0dB)					
10 ~ 820 MHz	dB	40	53	-	
820 ~ 835 MHz	dB	35	49	-	
912 ~ 927 MHz	dB	25	34	-	
927 ~ 972 MHz	dB	35	41	-	
972 ~ 1300 MHz	dB	40	55	-	
Temperature coefficient of frequency	ppm/k	-	-36	-	

## C. MEASUREMENT CIRCUIT:

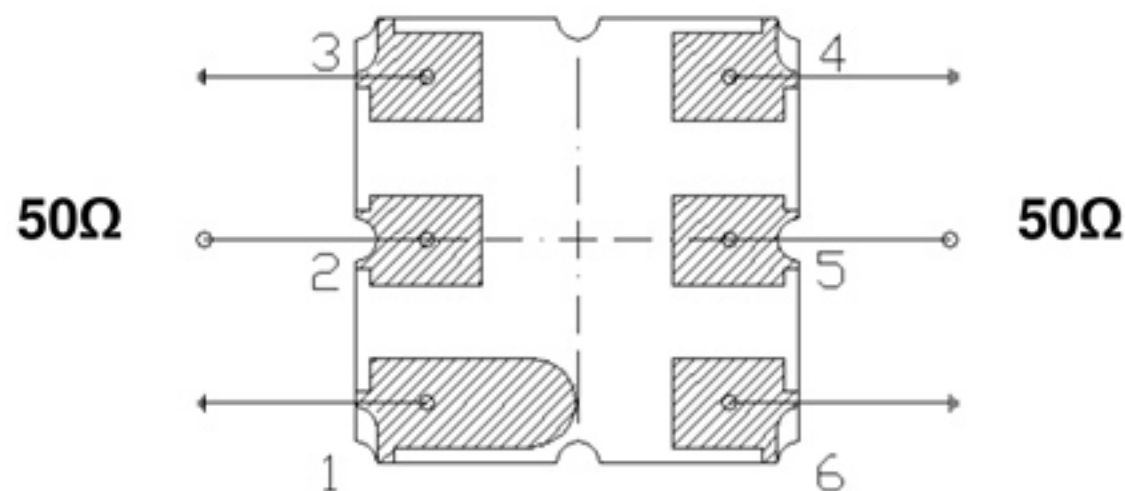


(2): Unbalance Port

(5): Unbalance Port


Others: Ground

**D. OUTLINE DRAWING:**

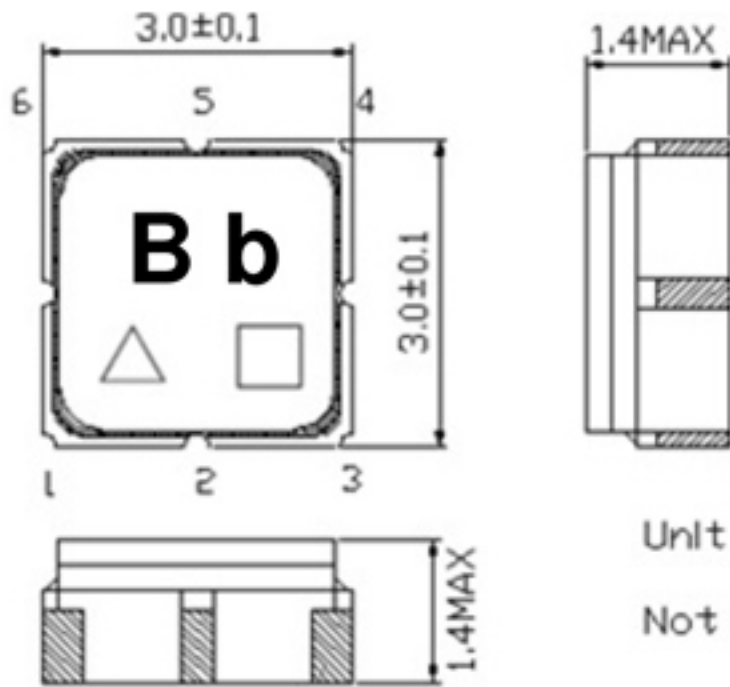

Unit : mm

Not Specified Tolerance : +/-0.15 mm

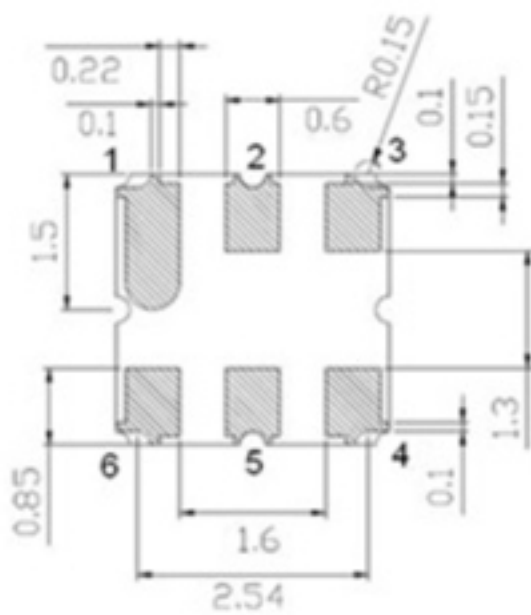

Pin No.	Symbol	Function
1	GND	Ground
2	IN	Input
3	GND	Ground
4	GND	Ground
5	OUT	Output
6	GND	Ground


△ : Year Code (2011->1, 2012->2, ..., 2019->9, 2020->0)

□ : Date Code



Date Code Table:

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

**E. PCB Footprint:**

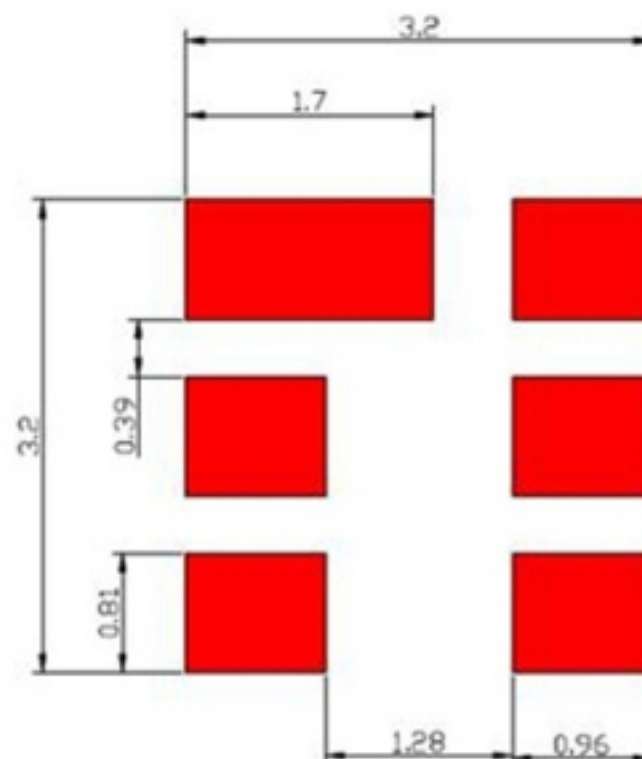


## F. Transfer Function:

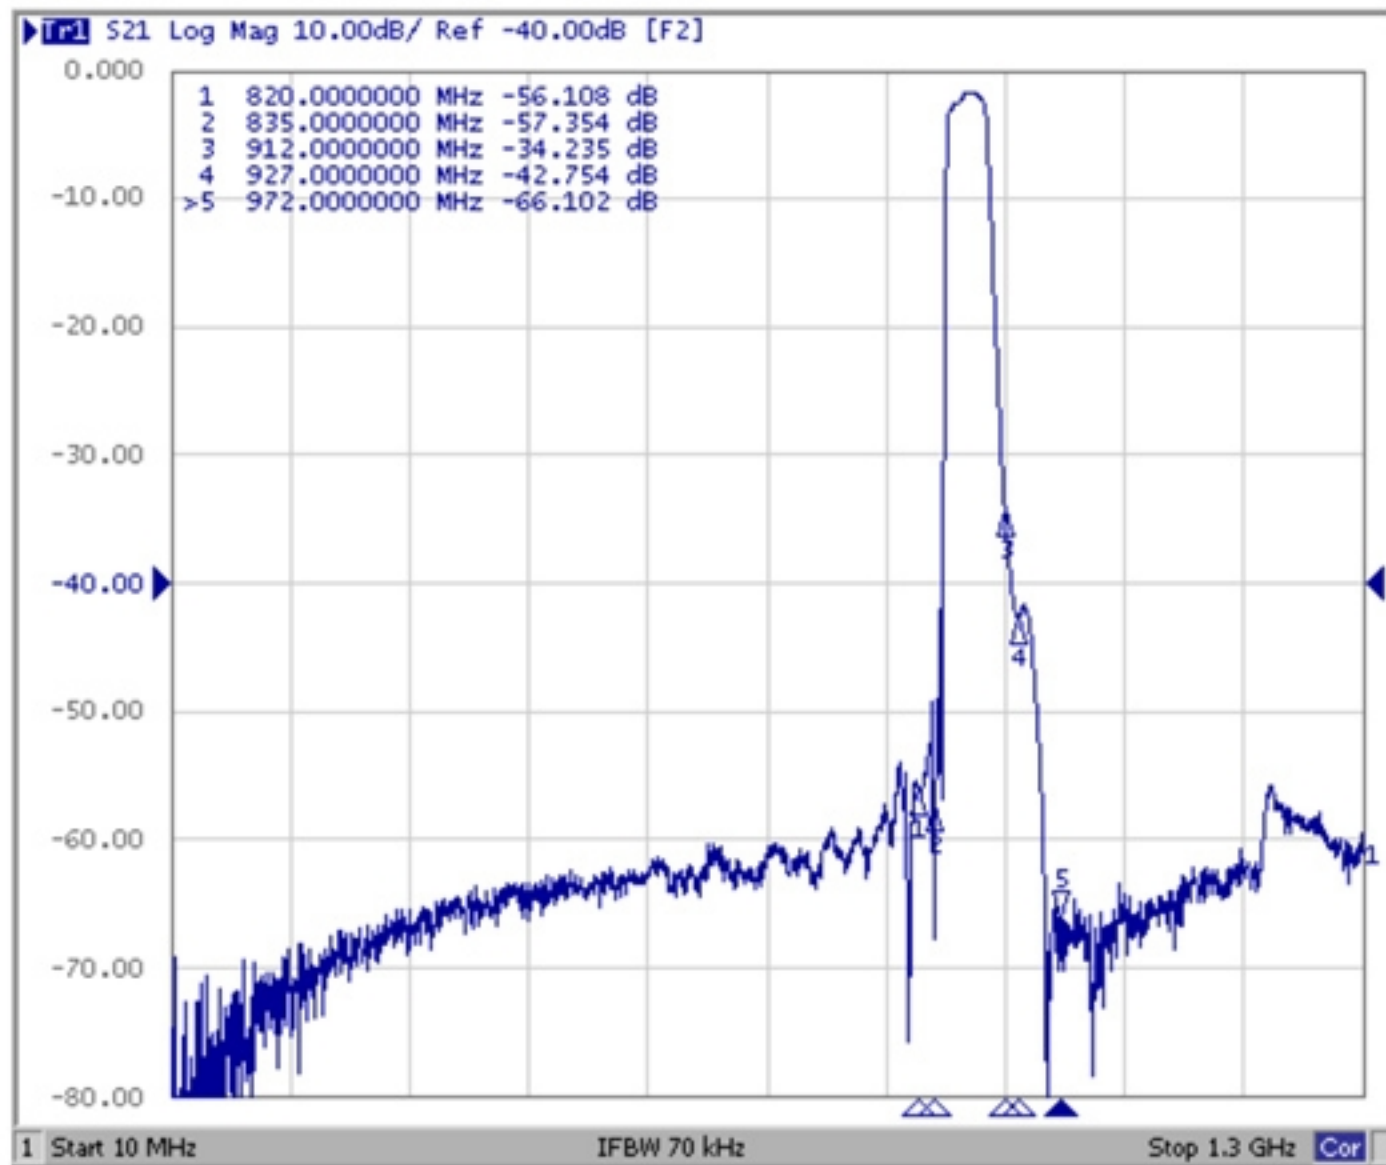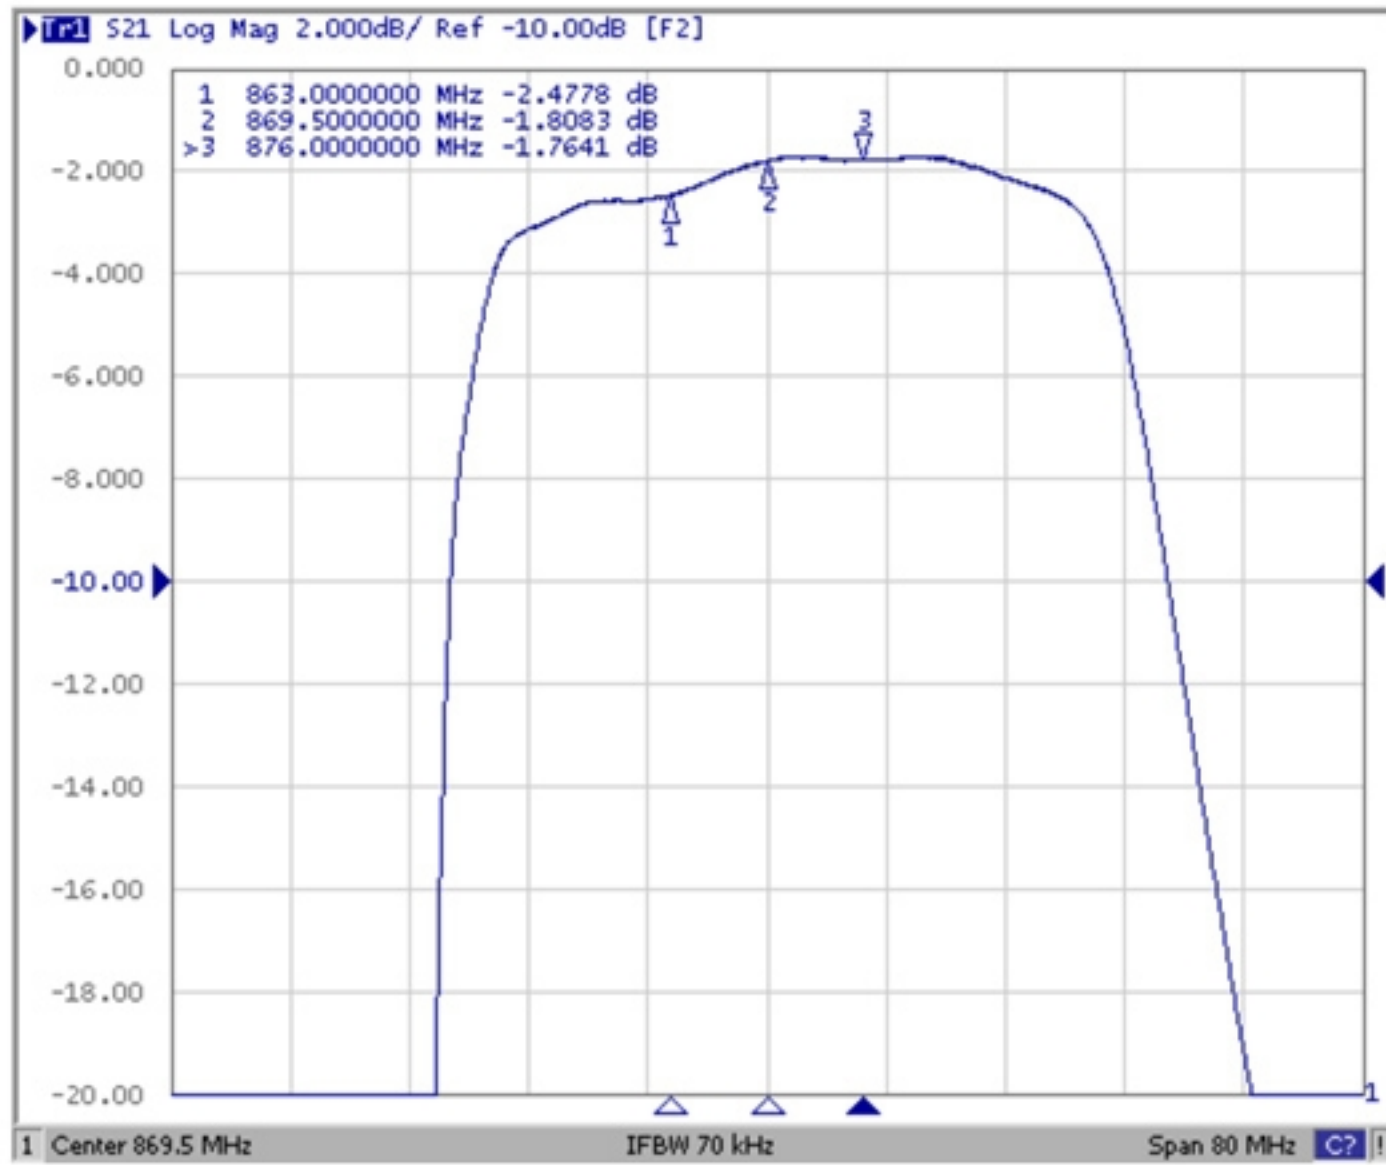


# Reflection Functions:

## S11

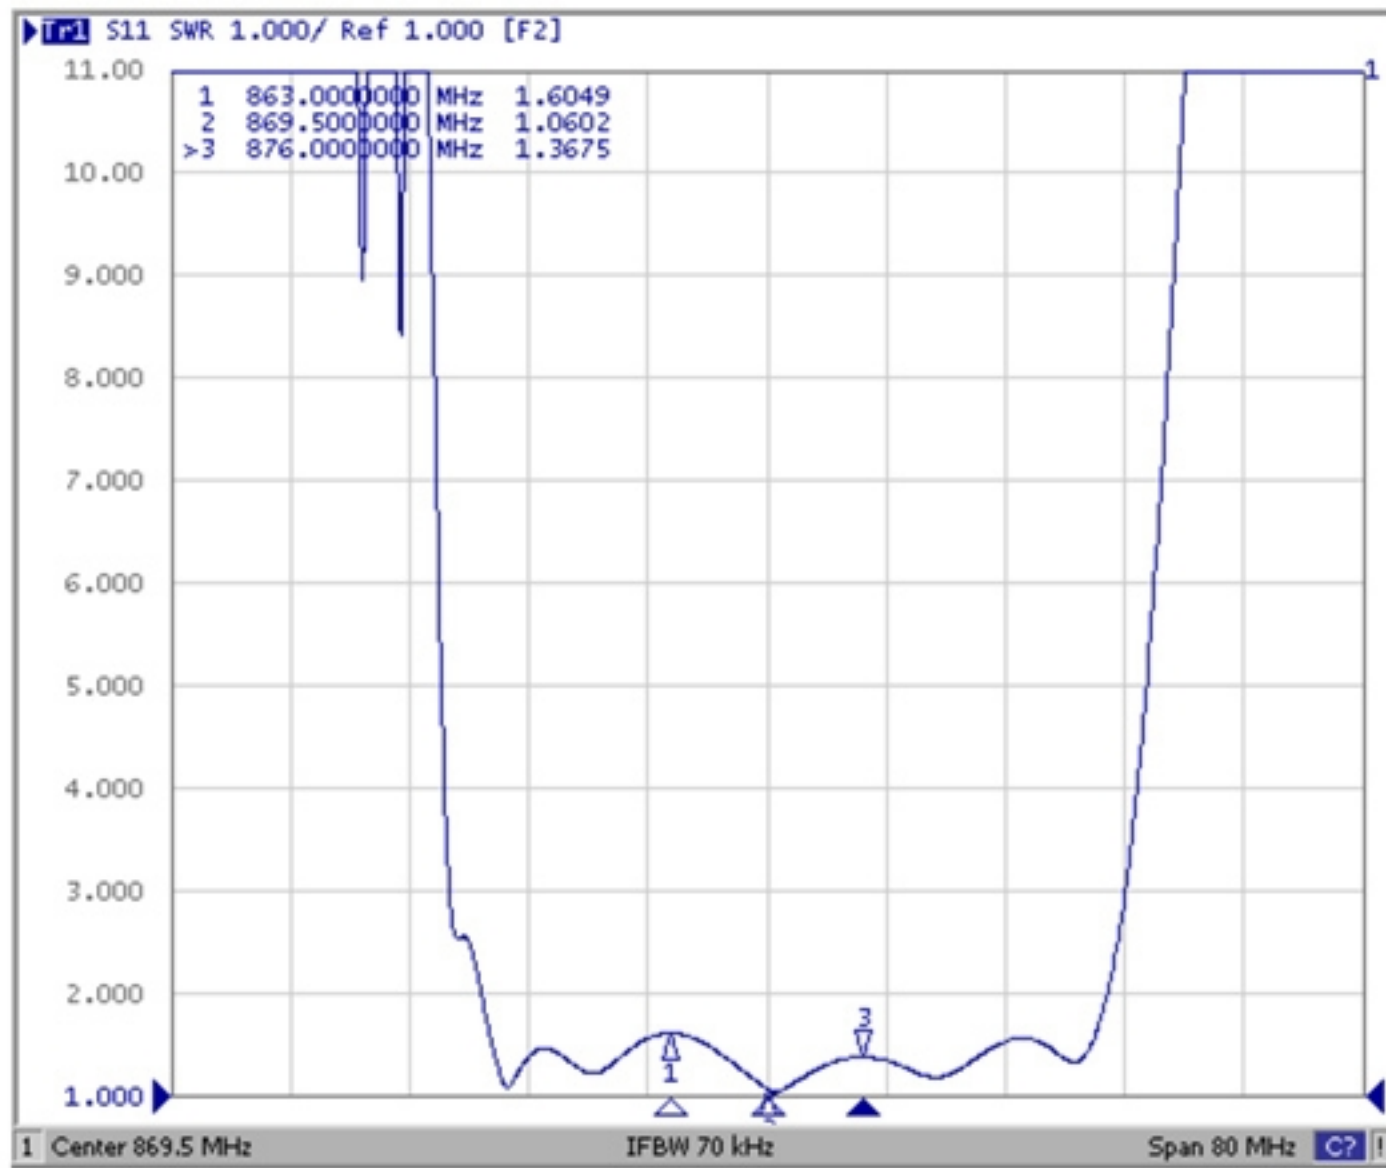


## S22

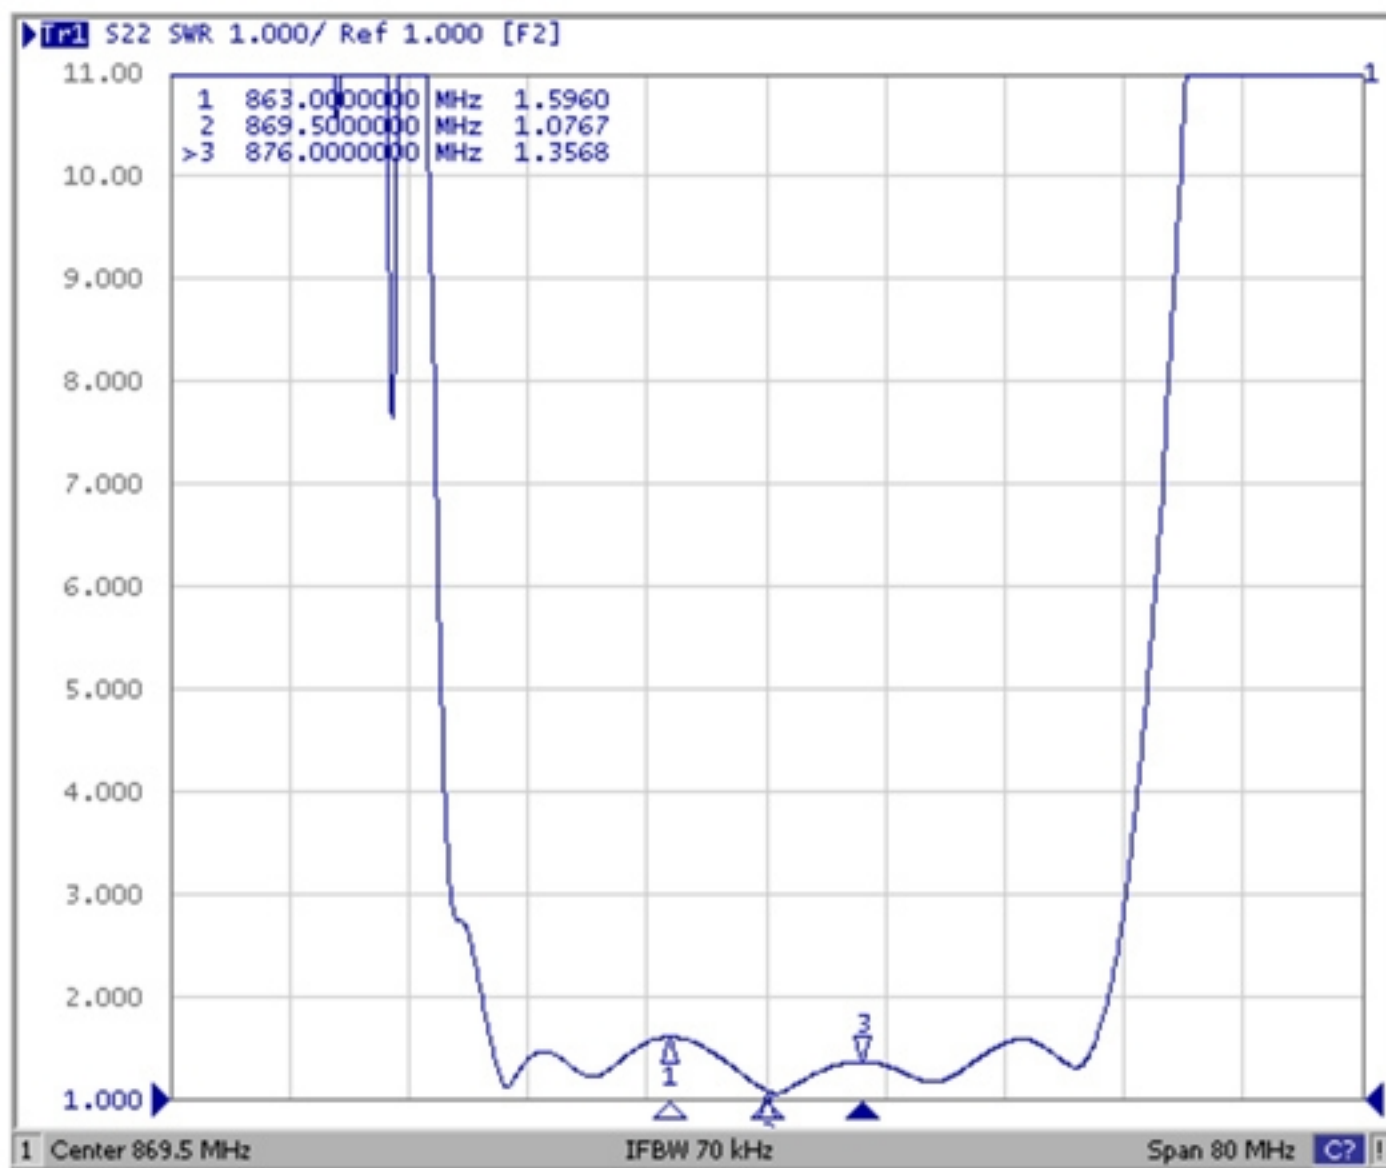


**G. PACKING: (Ref. WI-75M03)**

**1. REEL DIMENSION**

**(Please refer to FR-75D10 for packing quantity)**

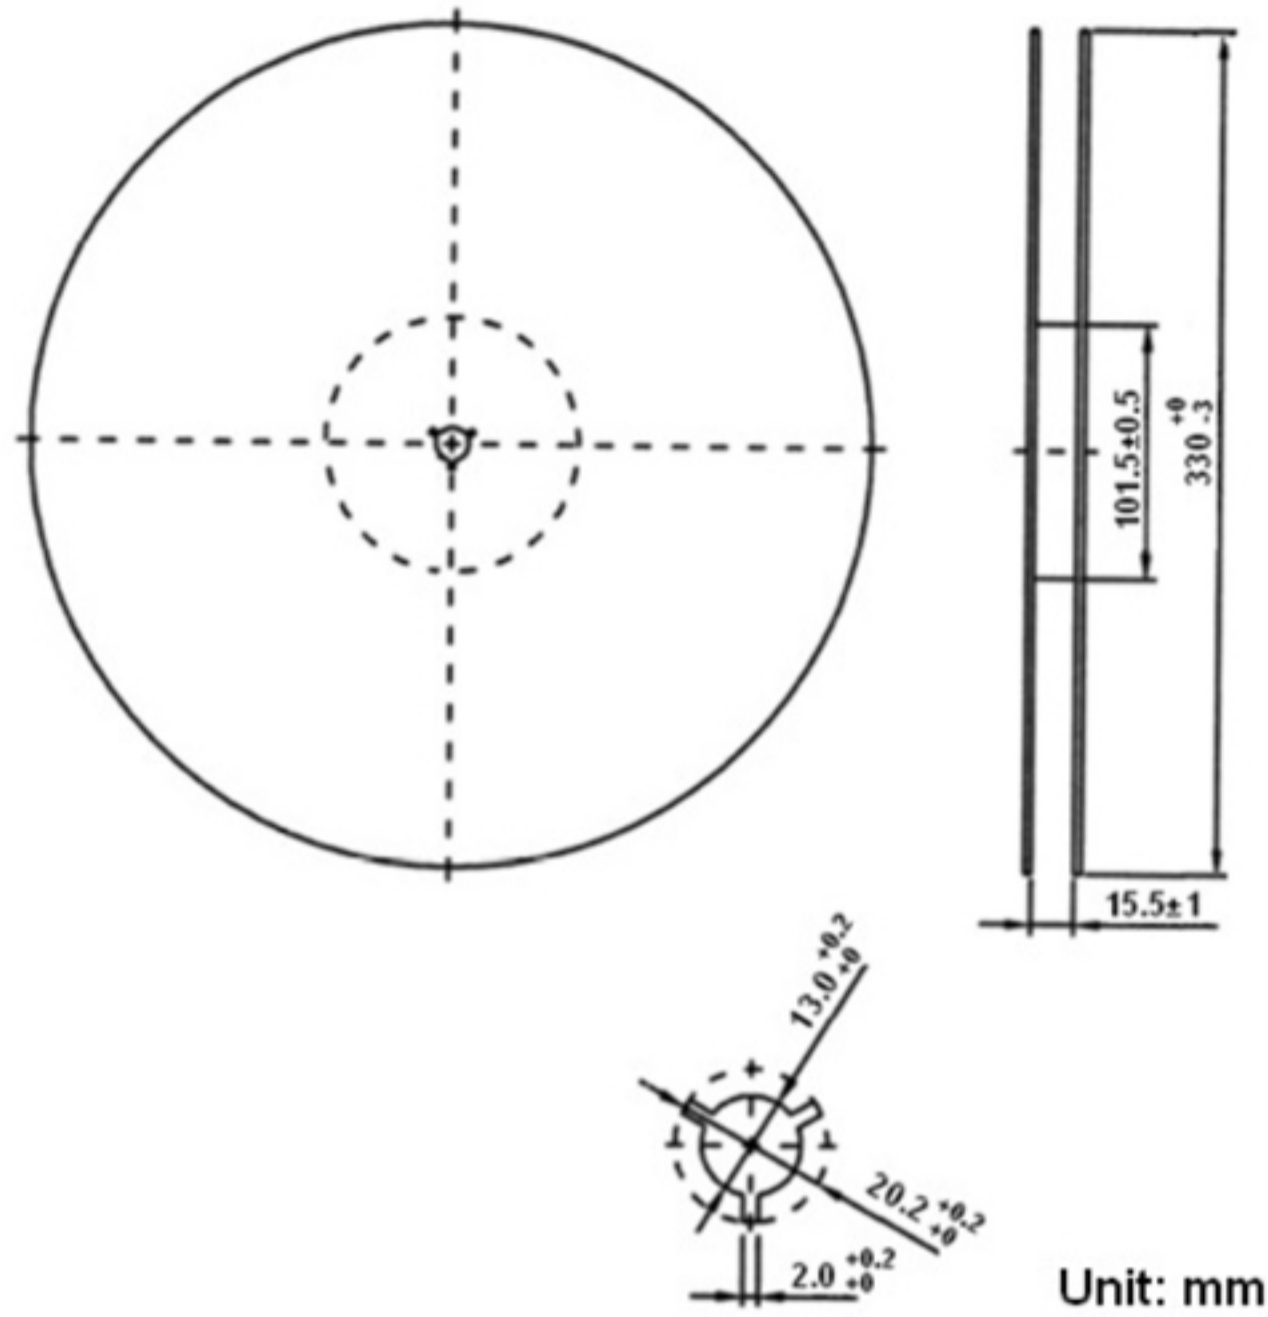

**2. TAPE DIMENSION**

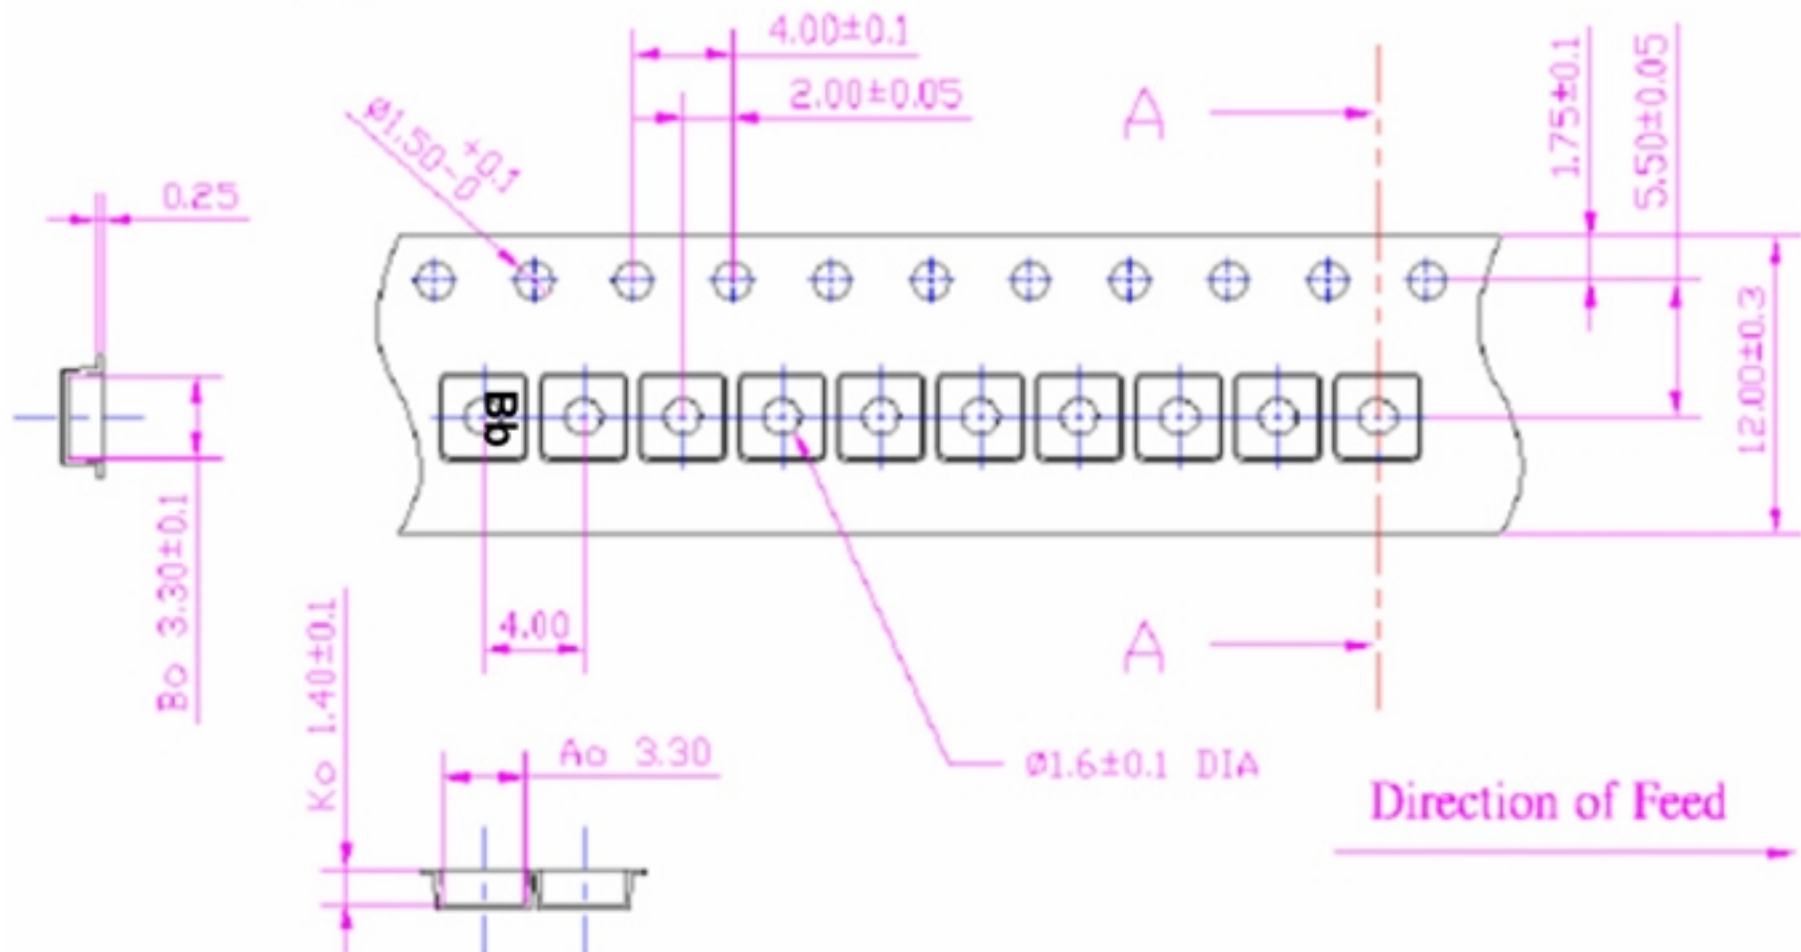

### H. Recommended Reflow Profile:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

