

SAW Filter 1150MHz

MODEL NO.:TA0620A

REV. NO.:2.0

A. MAXIMUM RATING:

1. Input Power Level: 15 dBm
2. DC Voltage : 3V
3. Operating Temperature: -20 °C to +70 °C
4. Storage Temperature: -30 °C to +85 °C
5. Moisture Sensitive Level: Level 1 (MSL1)

RoHS Compliant
Lead free
Lead-free soldering


Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Item		Unit	Min.	Type.	Max.	Note
Center Frequency	Fc	MHz	-	1150	-	-
Min. Insertion loss	IL	dB	-	1.7	3	-
1 dB bandwidth	BW ₁	MHz	32	38	-	-
3 dB bandwidth	BW ₃	MHz	33.5	43	-	-
35 dB bandwidth	BW ₃₅	MHz	-	80	90	-
Ripple in 27 MHz BW		dB	-	0.4	0.8	-
Return Loss		dB	10	13	-	-
GDV in 27 MHz BW		ns	-	20	40	-
Temp tolerance		Ppm/c	-	36	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

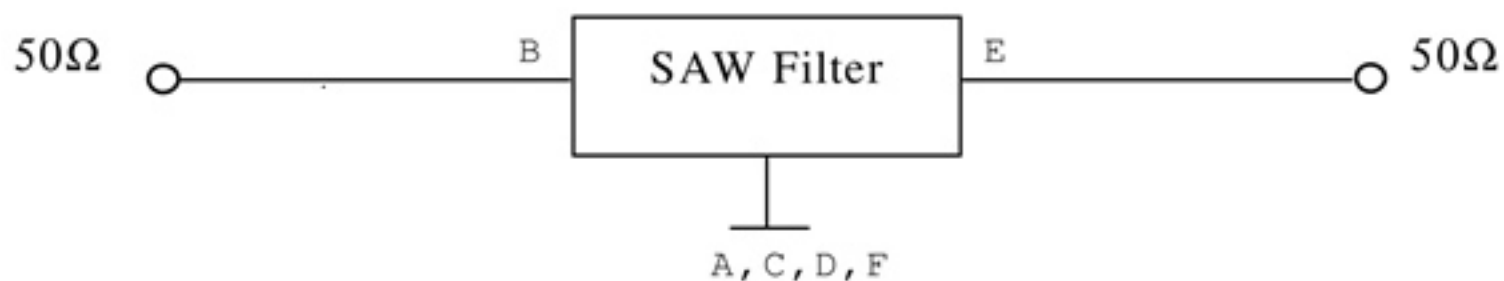

D. OUTLINE DRAWING:

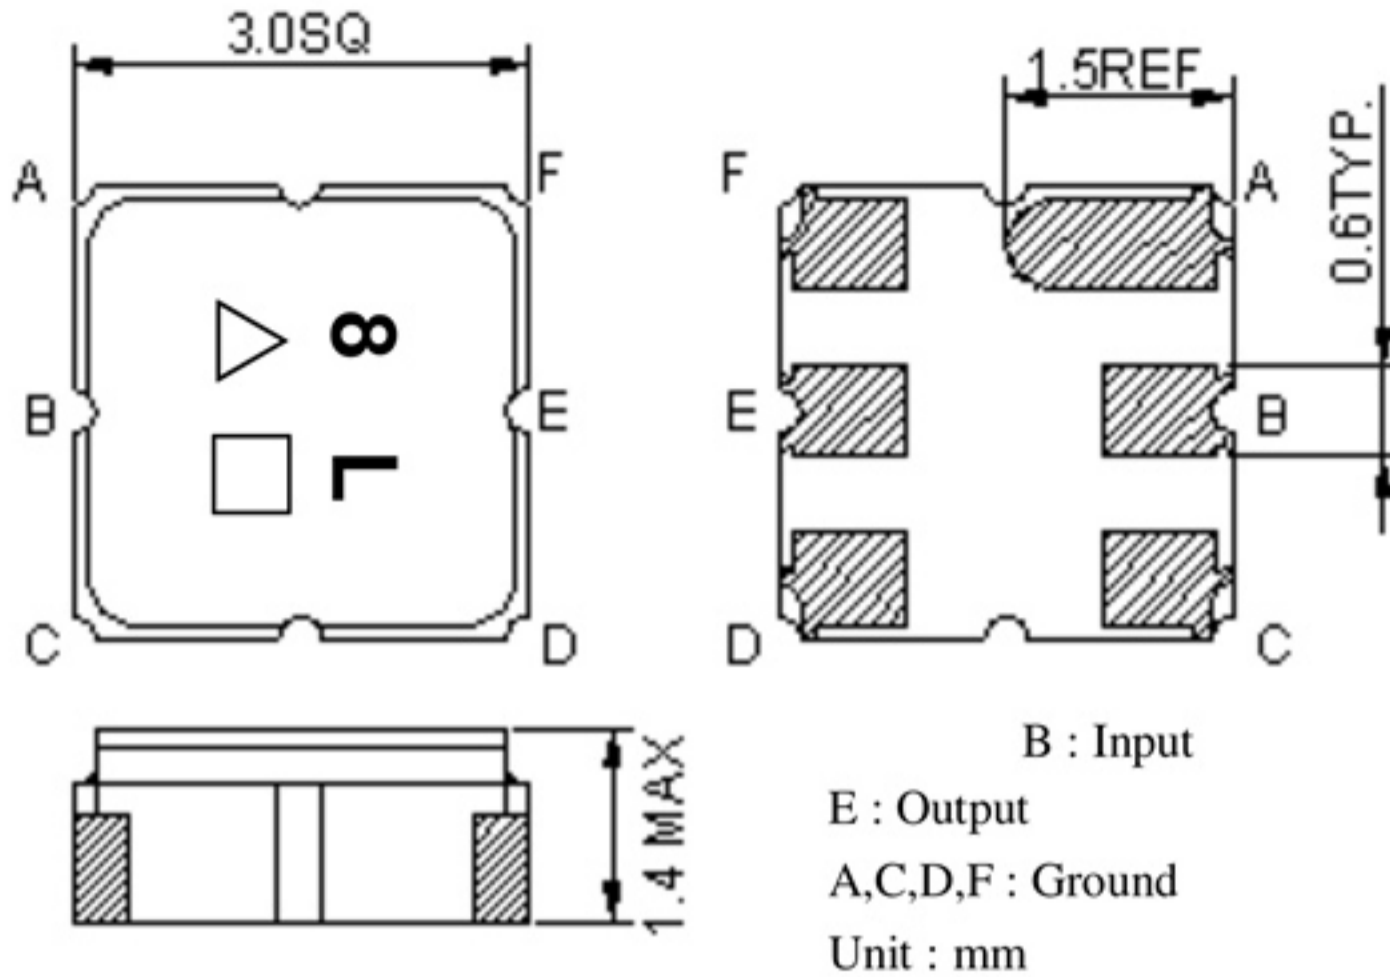


△ : Year Code (2006->6, ..., 2009->9)



□ : Date Code (Follow the table from planner each year)

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

E. PCB Footprint:

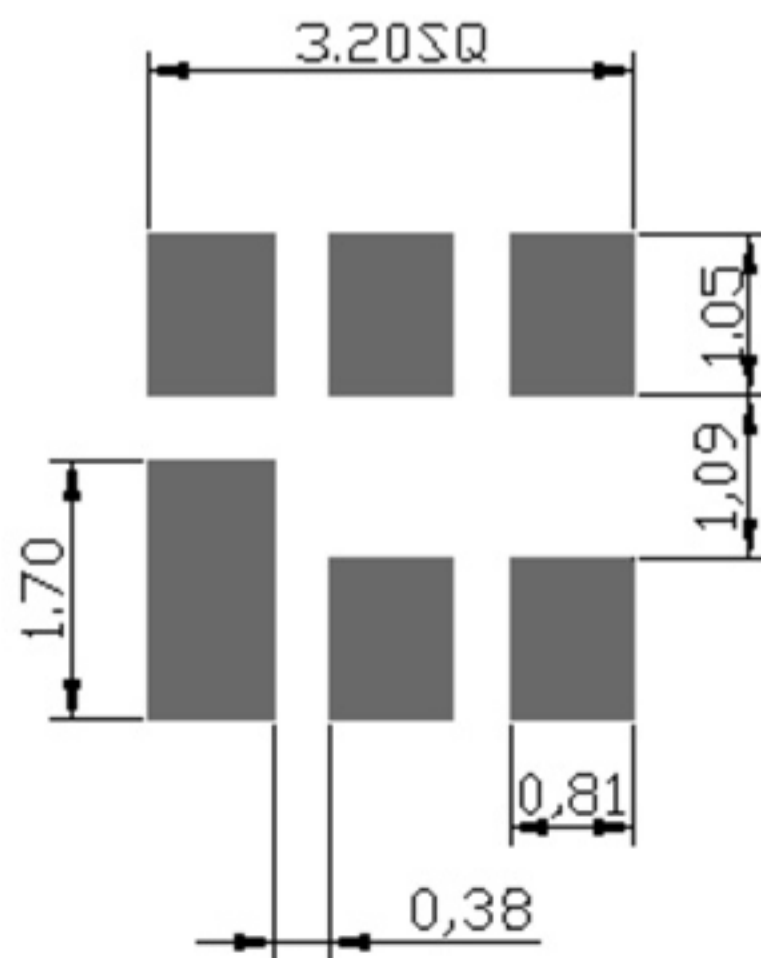


F. Frequency Characteristics:

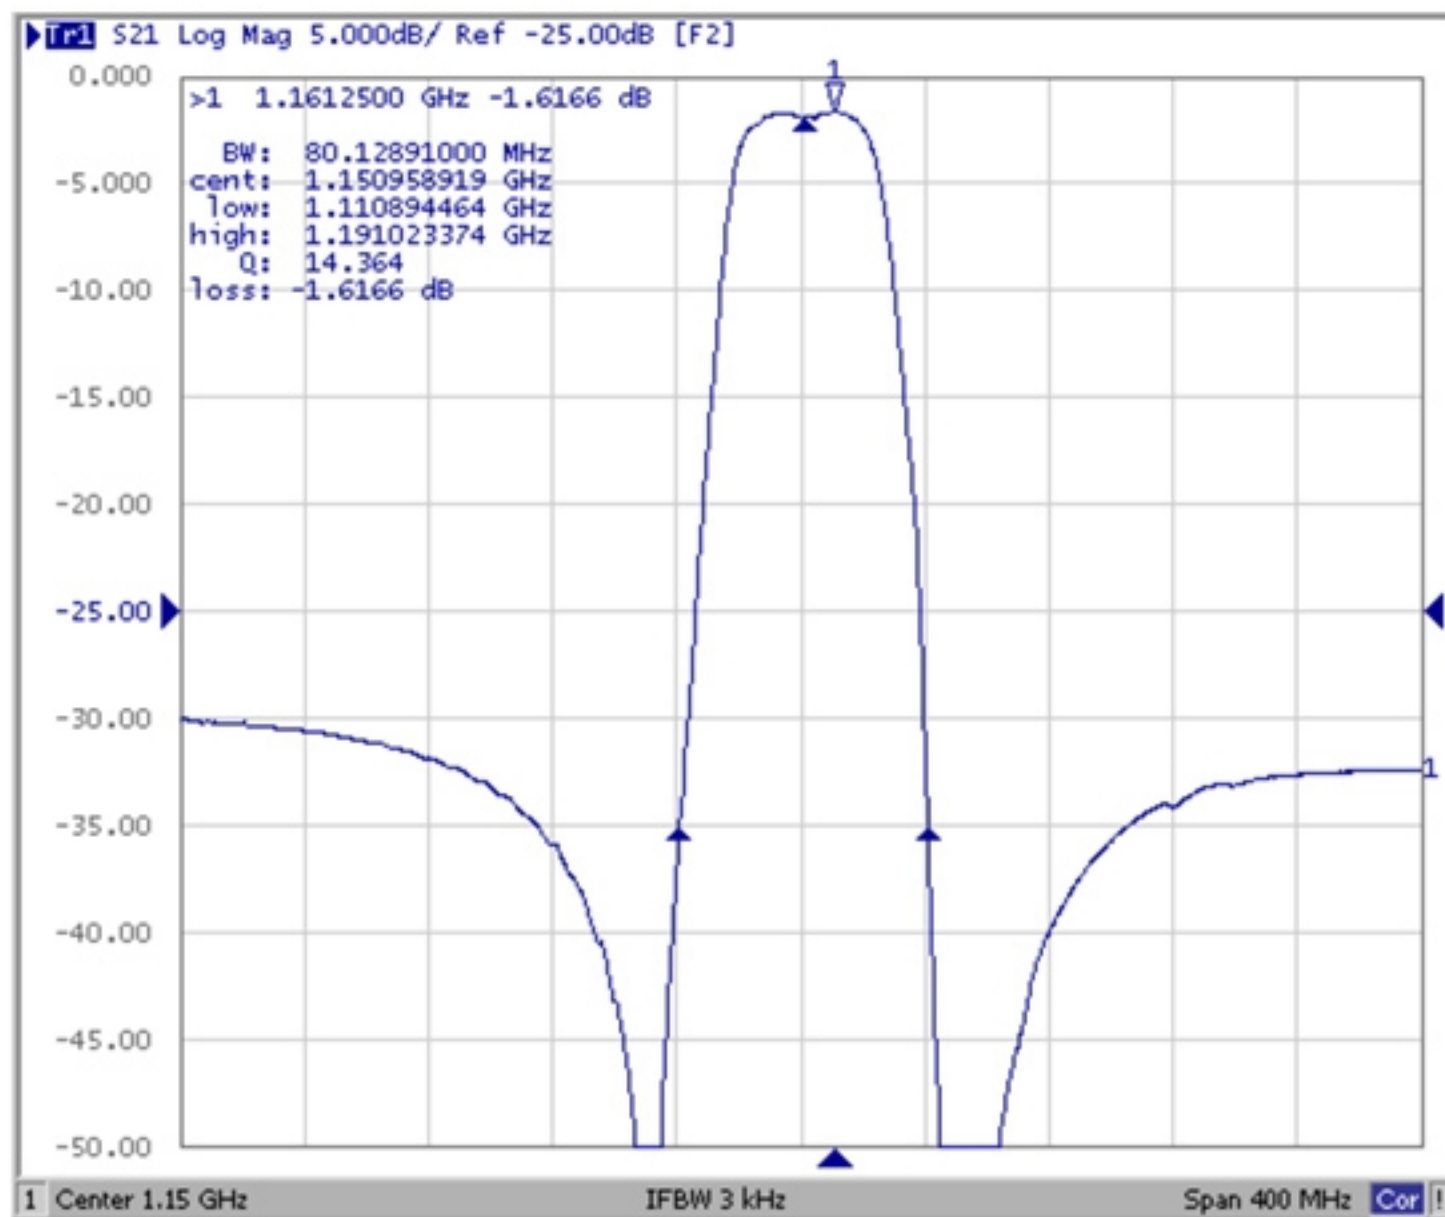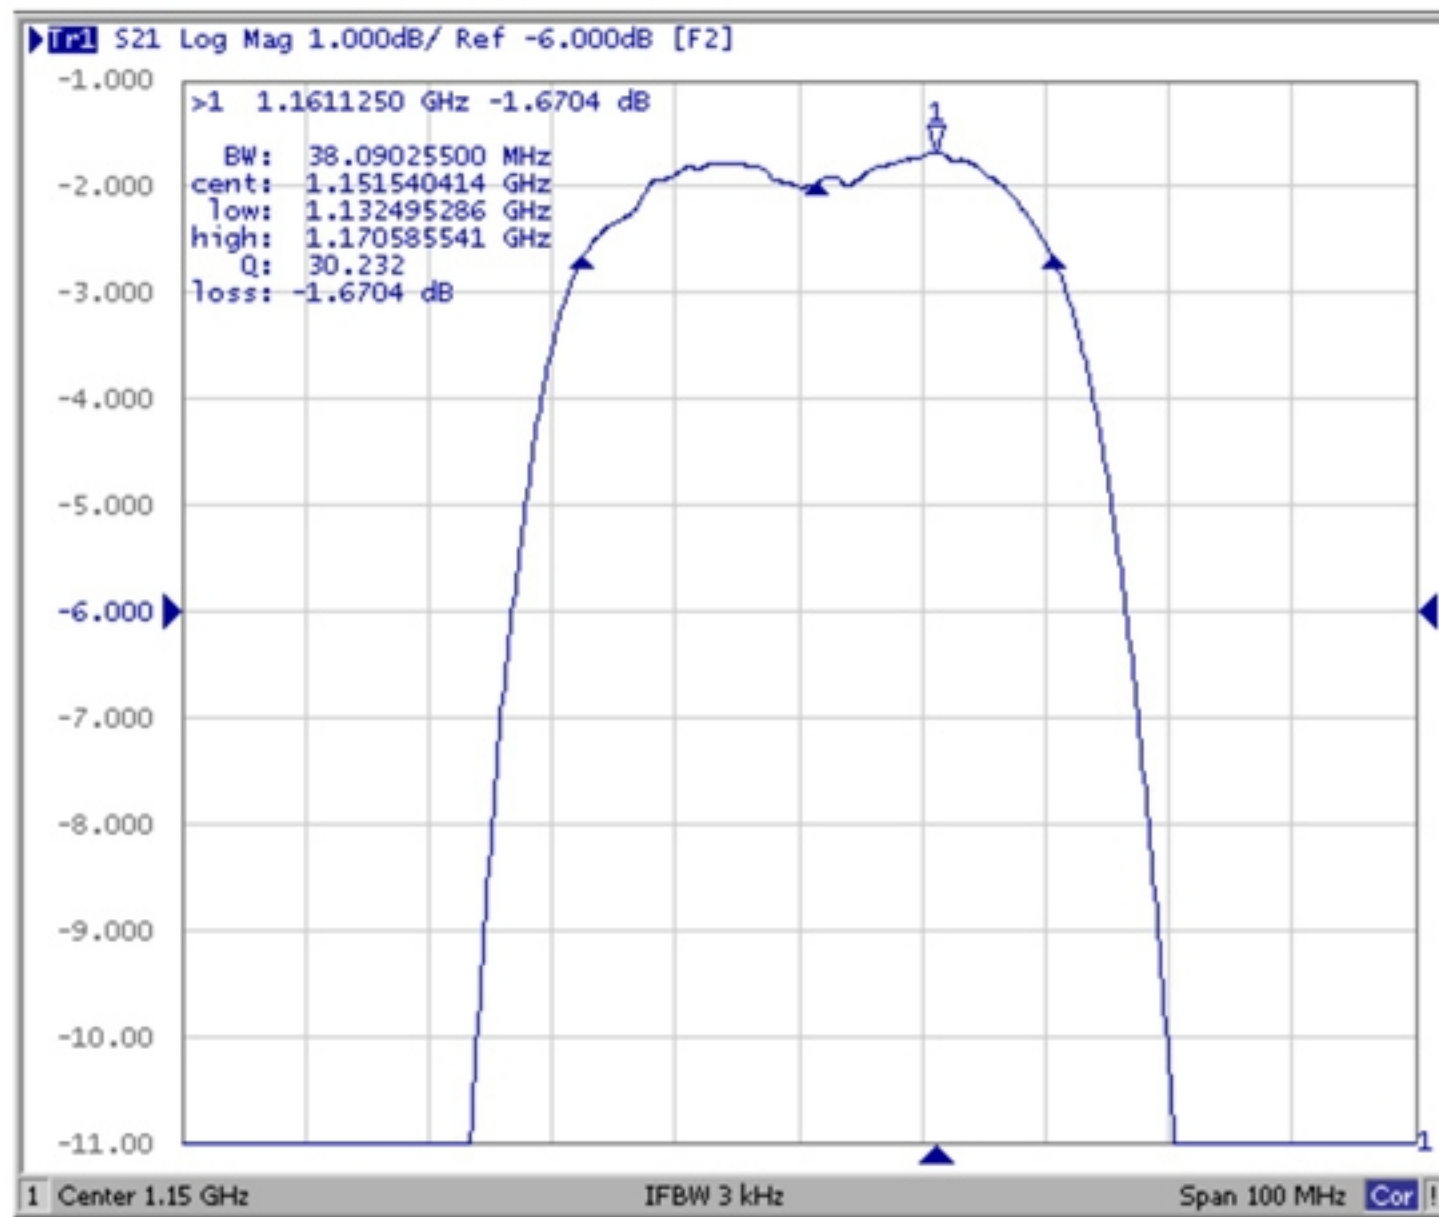


Reflection Functions:

S11

S22

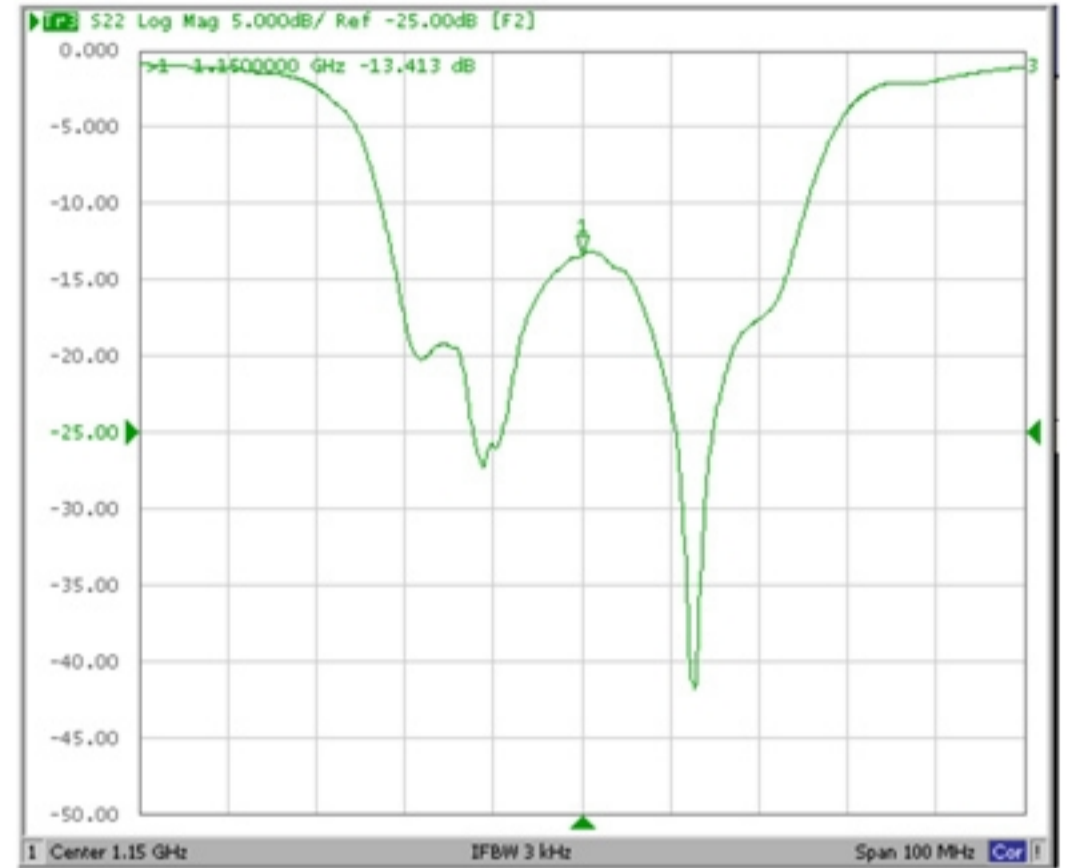


Group delay

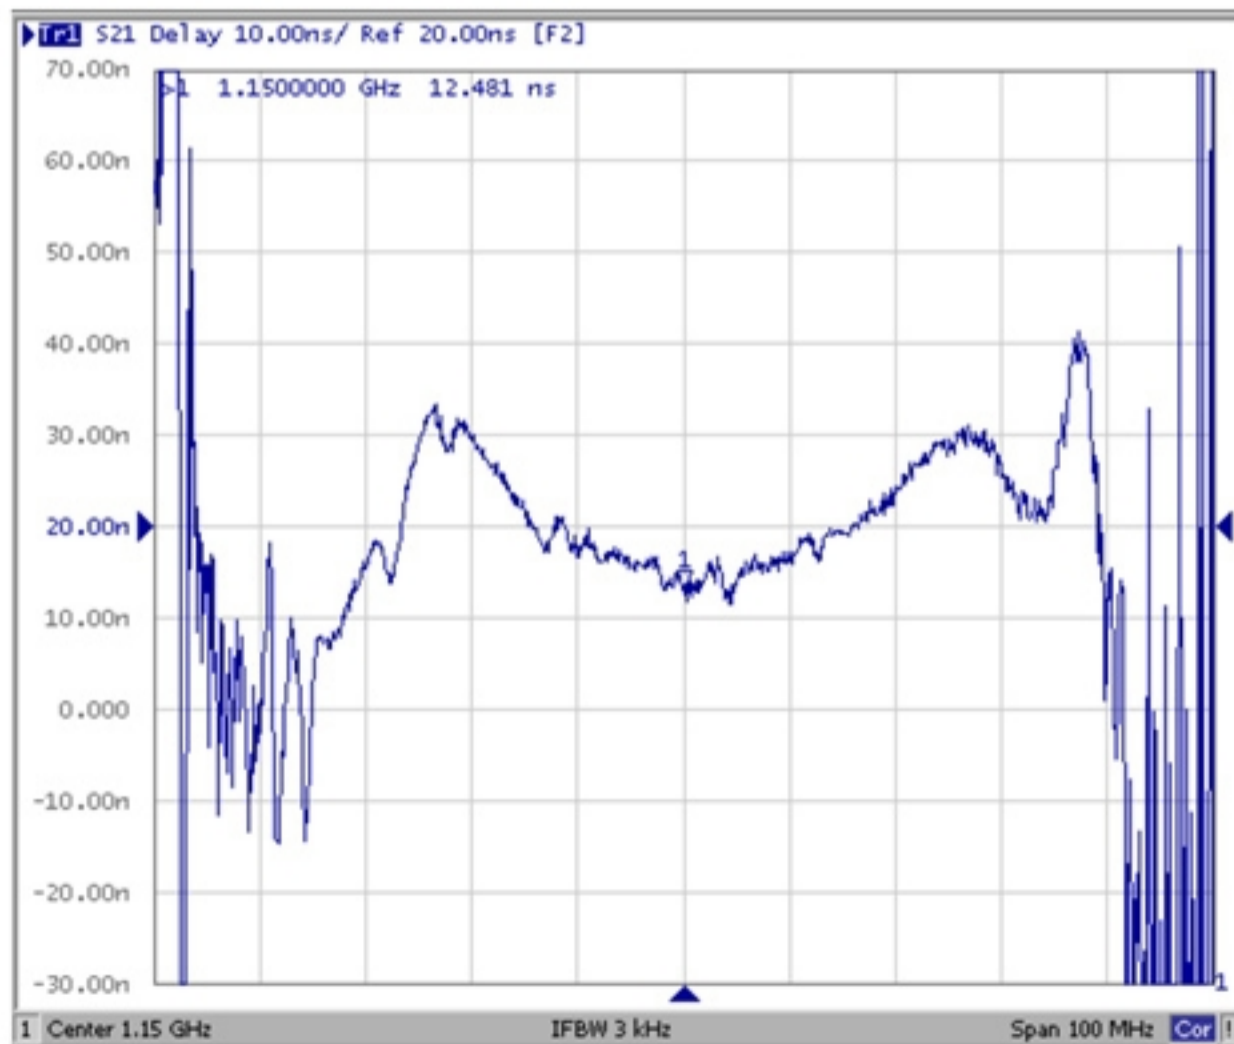


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=1000 ; 13"=3000)

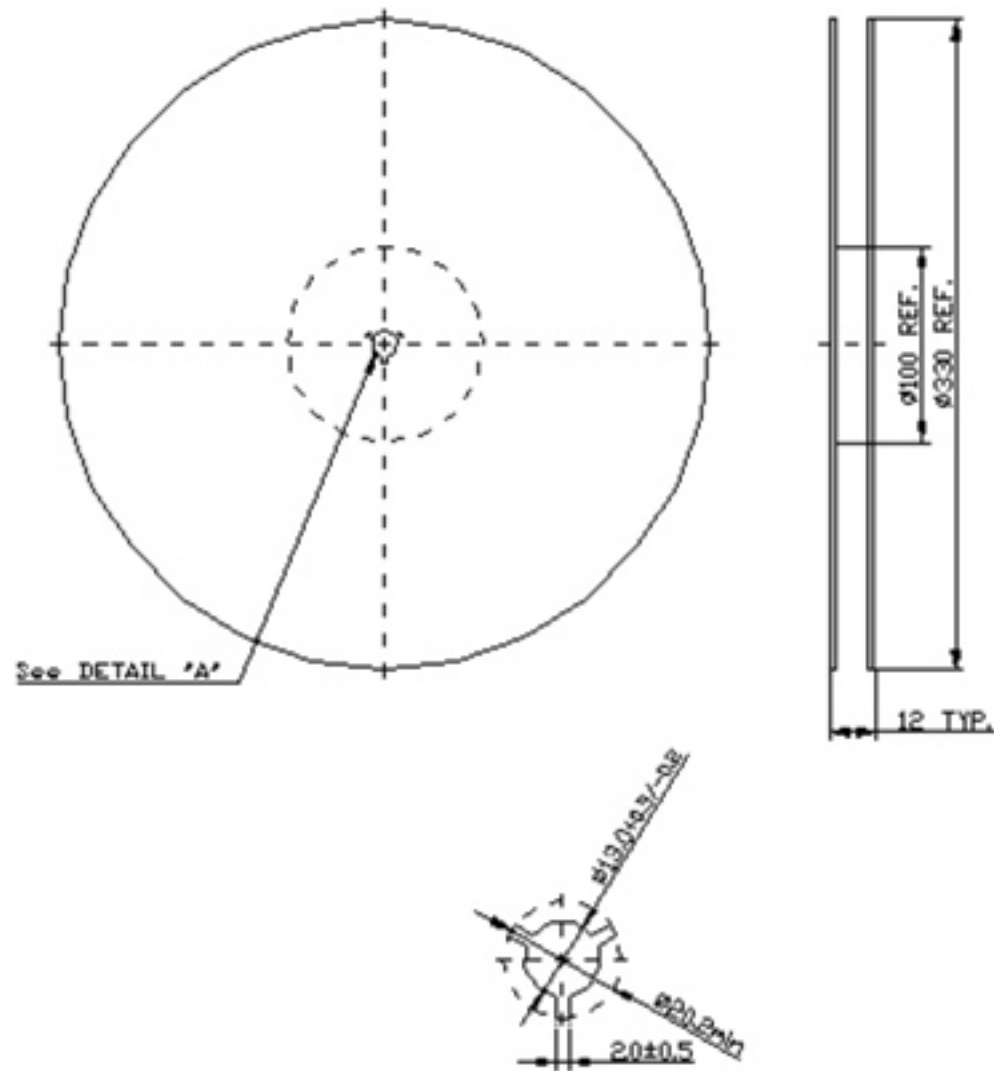

2.TAPE DIMENSION

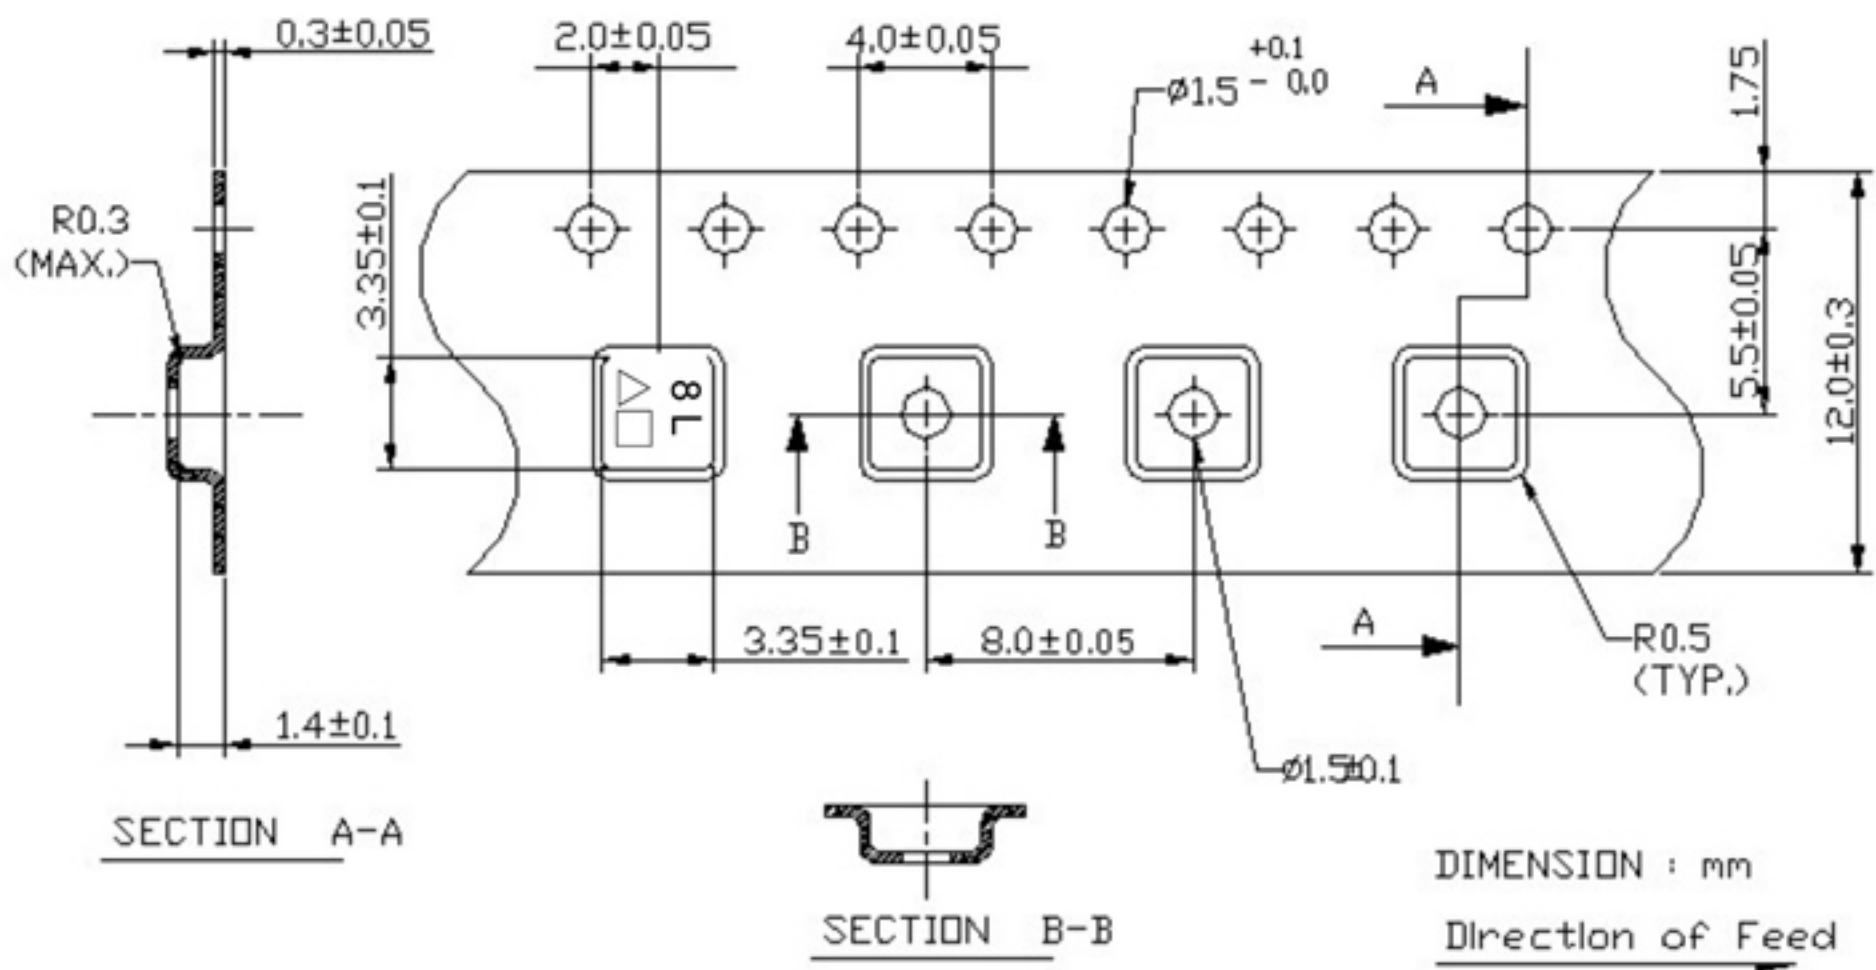

H. RECOMMENDED REFLOW PROFILE:

