


SAW Filter 1587.1 MHz

MODEL NO.: TA2551A

REV. NO.:2

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3 V
3. Operating Temperature: -40 °C to +85 °C
4. Storage Temperature: -40 °C to +85 °C
5. Moisture Sensitivity Level: Level 2a(MSL 2a)

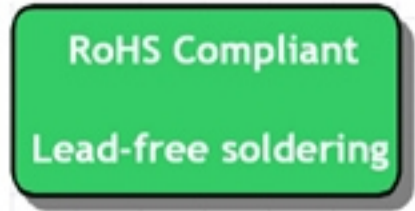


Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:



Item	Unit	Min.	Typ.	Max.	
Center frequency	Fc	MHz	-	1587.1	-
Insertion loss (1559.6~1614.6 MHz)	IL	dB	-	2.3	4.0
Amplitude ripple (1565.1~1609.1 MHz)	dB	-	0.8	1.2	
Group delay ripple (1559.6~1614.6 MHz)	ns	-	9	50	
Attenuation (Reference level from 0 dB)					
10 ~ 1435	MHz	dB	35	47	-
1435 ~ 1525	MHz	dB	20	30	-
1653 ~ 1743	MHz	dB	25	35	-
1743 ~ 2500	MHz	dB	28	39	-
2500 ~ 3000	MHz	dB	20	40	-
Temperature coefficient of frequency	ppm/k	-	-36	-	

C. MEASUREMENT CIRCUIT:

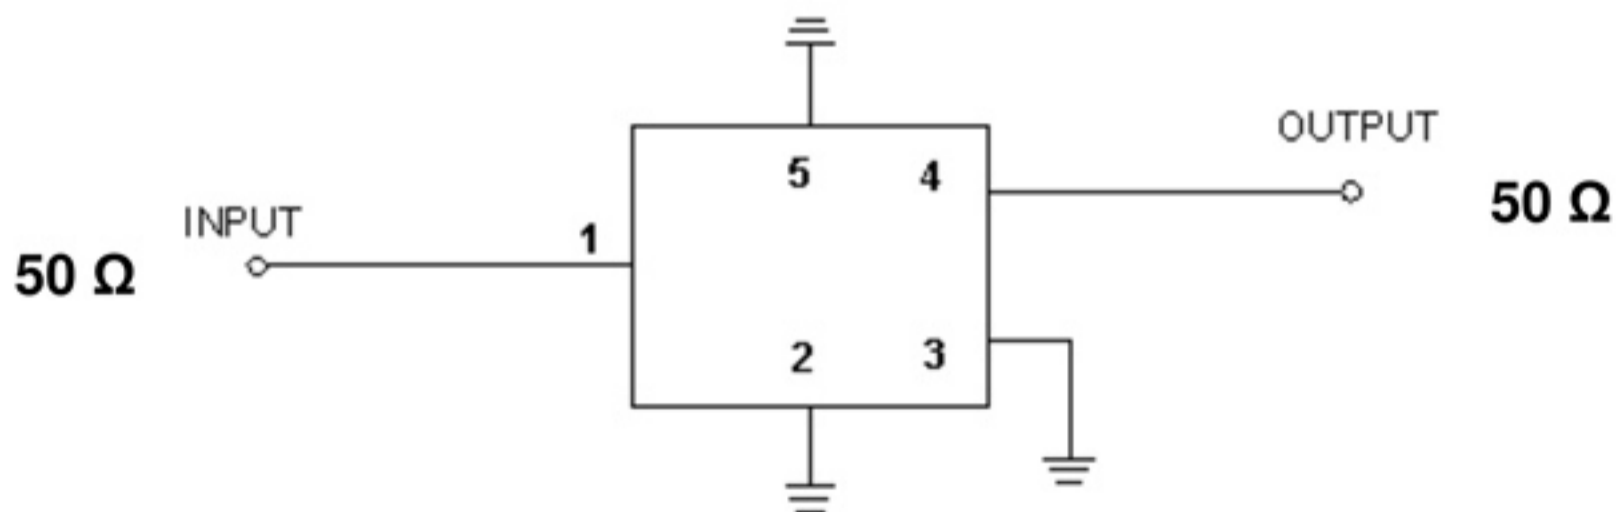


- (1): Unbalance Port
- (4): Unbalance Port
- Others: Ground

D. OUTLINE DRAWING:

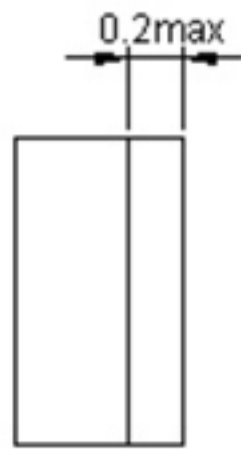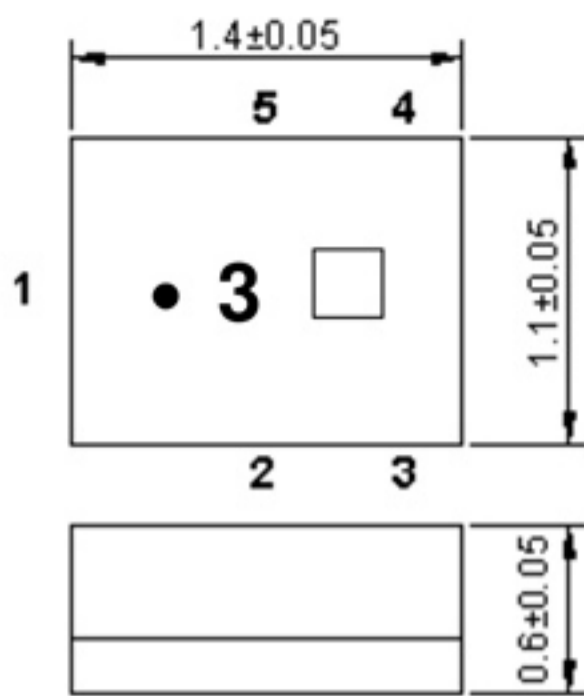

All tolerances are +/-0.05 mm unless otherwise specified
 Coplanarity : 0.1 mm max.
 1 to 5 : Pin No.
 Unit : mm

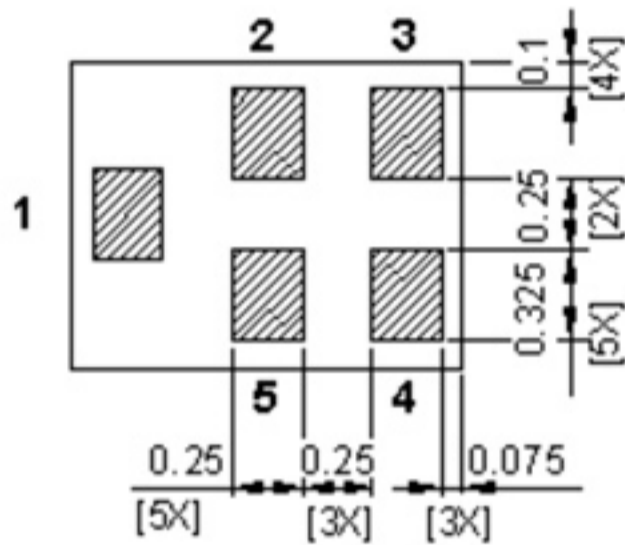


Pin No.	Symbol	Function
1	IN	Input
2	GND	Ground
3	GND	Ground
4	OUT	Output
5	GND	Ground

□ : Year/Month Code (Follow the table)




YEAR/Month	1	2	3	4	5	6	7	8	9	10	11	12
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z
2015	a	b	c	d	e	f	g	h	j	k	l	m
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>	<u>H</u>	<u>J</u>	<u>K</u>	<u>L</u>	<u>M</u>
2018	<u>N</u>	<u>P</u>	<u>Q</u>	<u>R</u>	<u>S</u>	<u>T</u>	<u>U</u>	<u>V</u>	<u>W</u>	<u>X</u>	<u>Y</u>	<u>Z</u>
2019	<u>a</u>	<u>b</u>	<u>c</u>	<u>d</u>	<u>e</u>	<u>f</u>	<u>g</u>	<u>h</u>	<u>i</u>	<u>k</u>	<u>l</u>	<u>m</u>
2020	<u>n</u>	<u>p</u>	<u>q</u>	<u>r</u>	<u>s</u>	<u>t</u>	<u>u</u>	<u>v</u>	<u>w</u>	<u>x</u>	<u>y</u>	<u>z</u>

E. PCB Footprint:

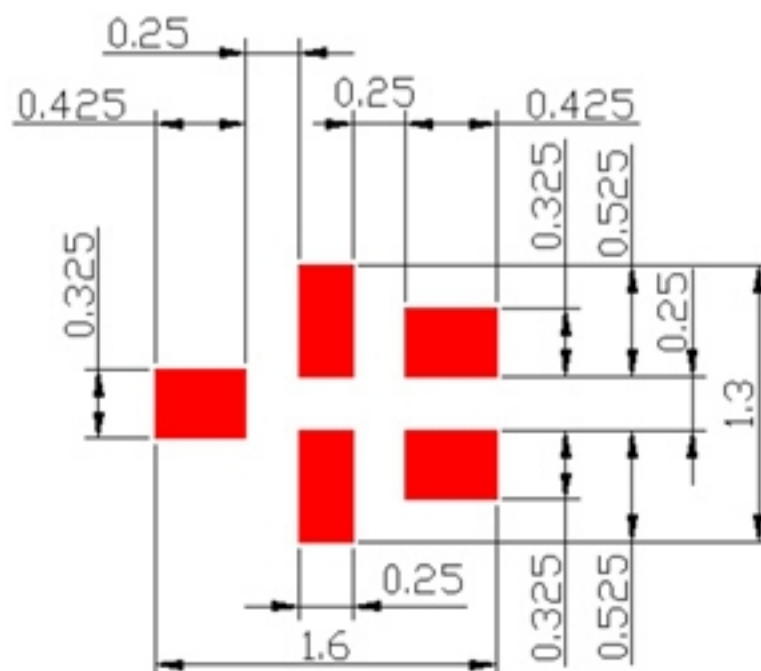

■ : Land Pattern
 Unit : mm


F. Frequency Characteristics:

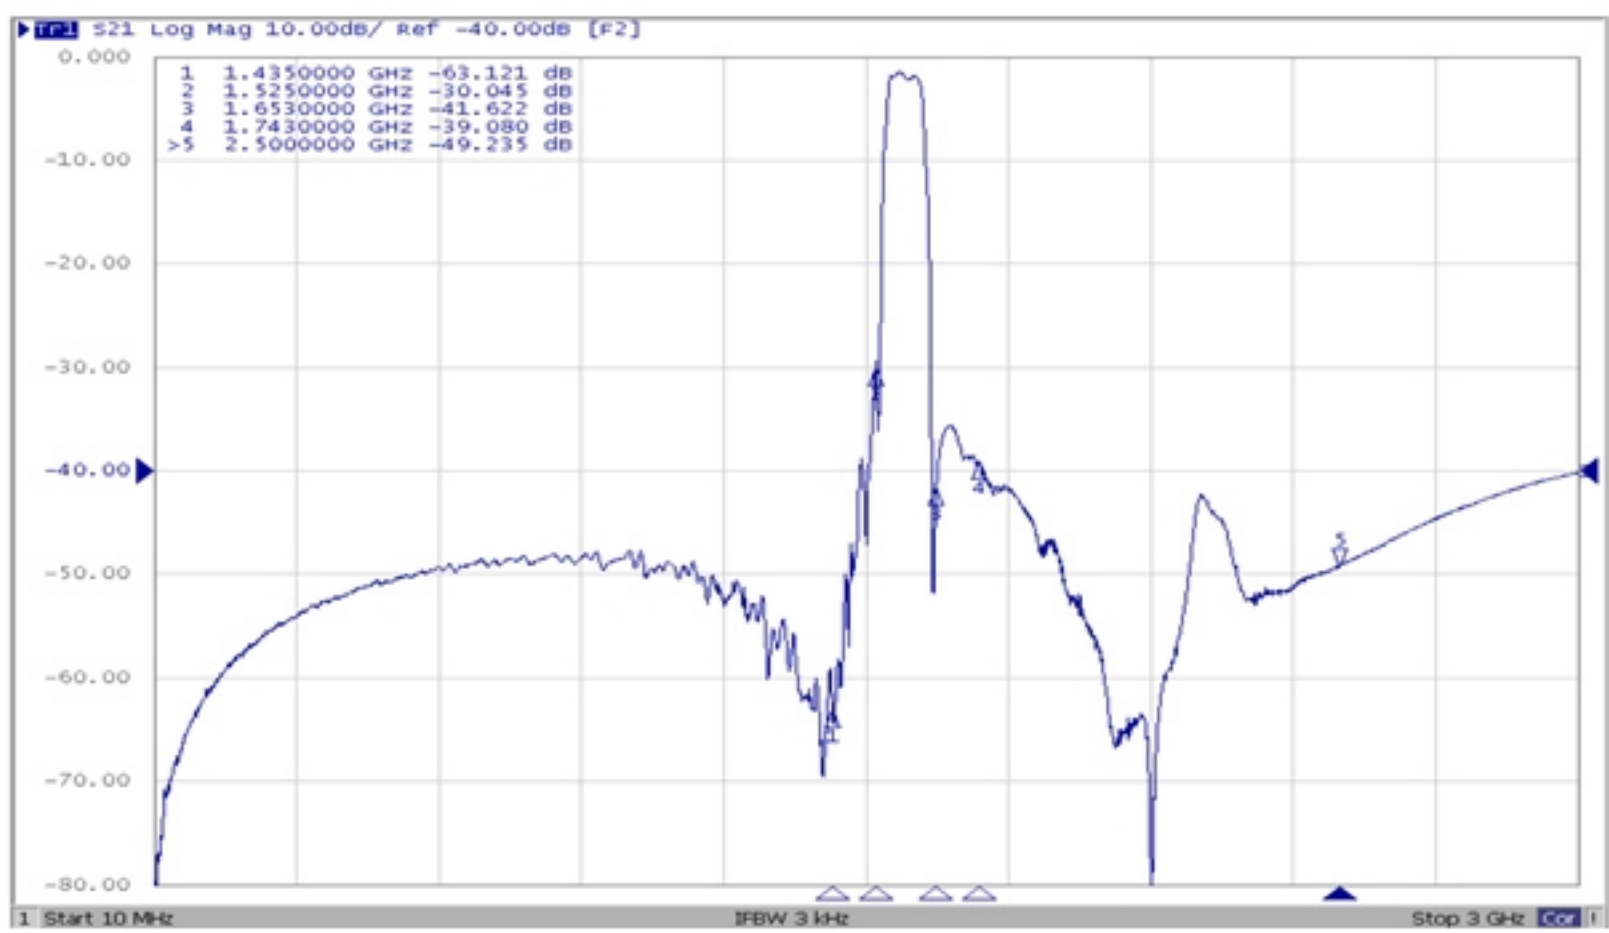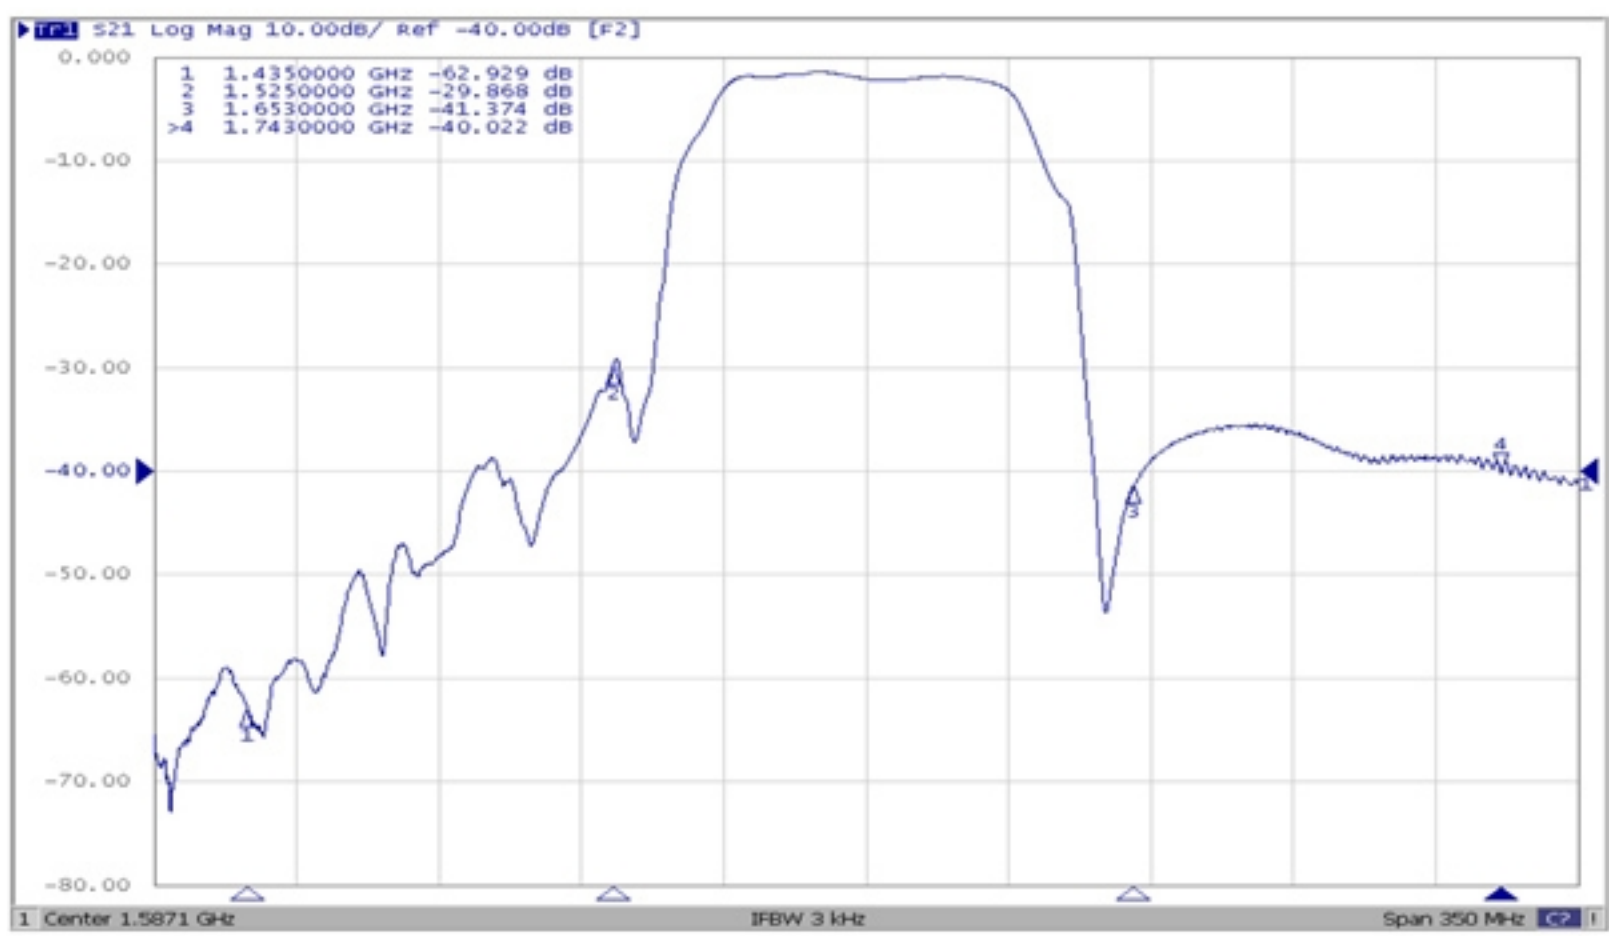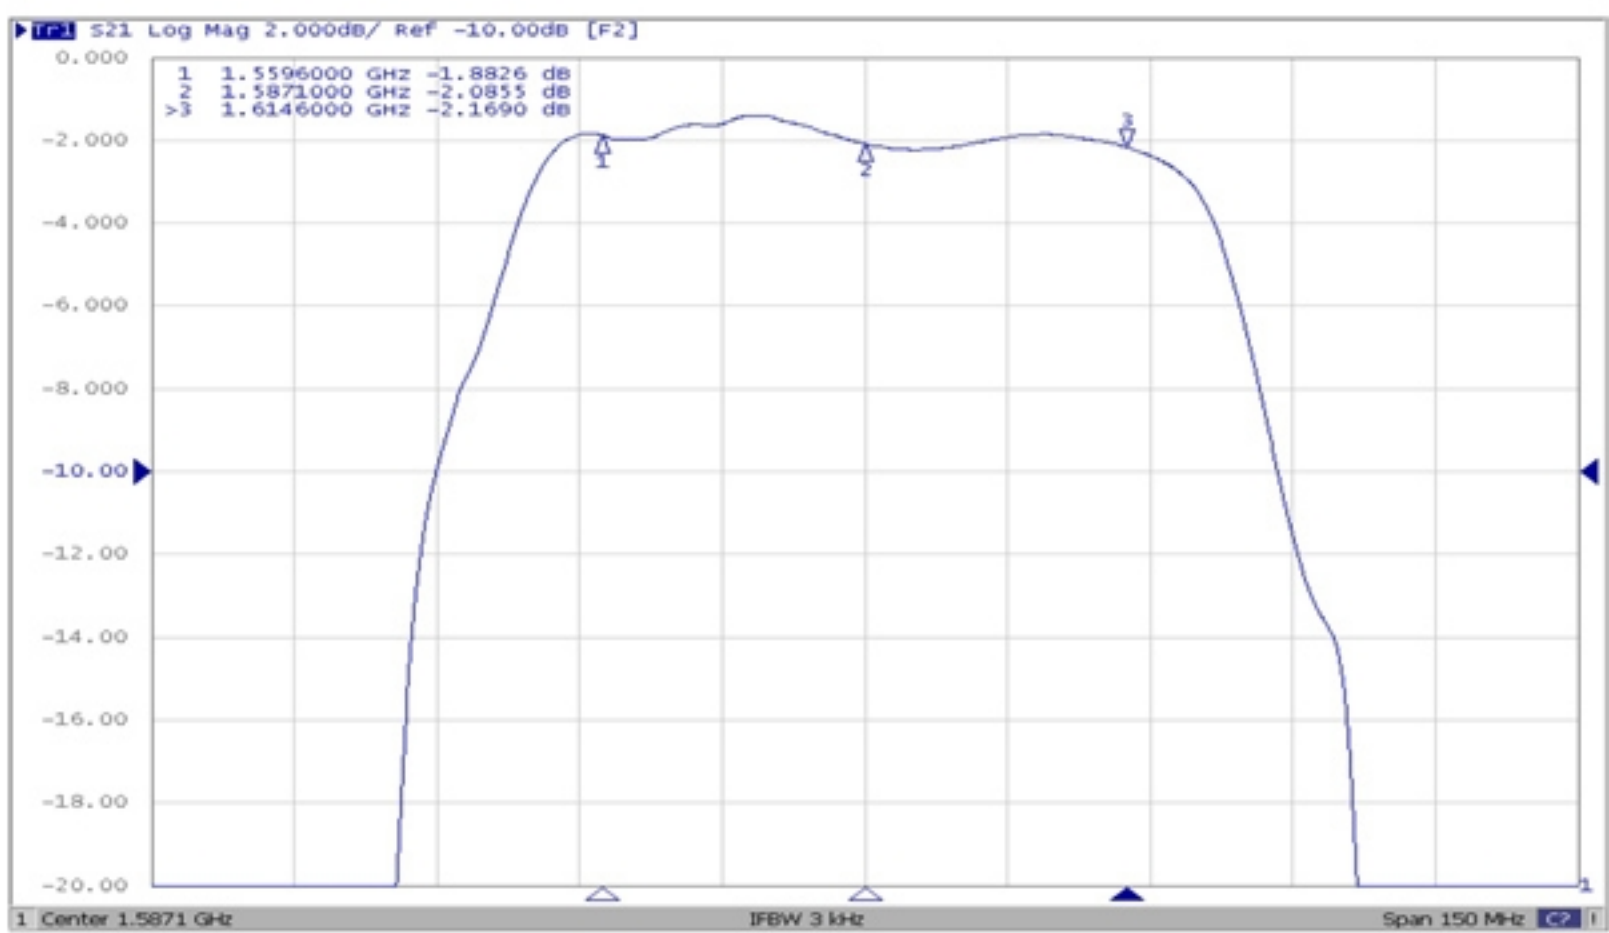


G. PACKING: (Ref. WI-75M03)

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

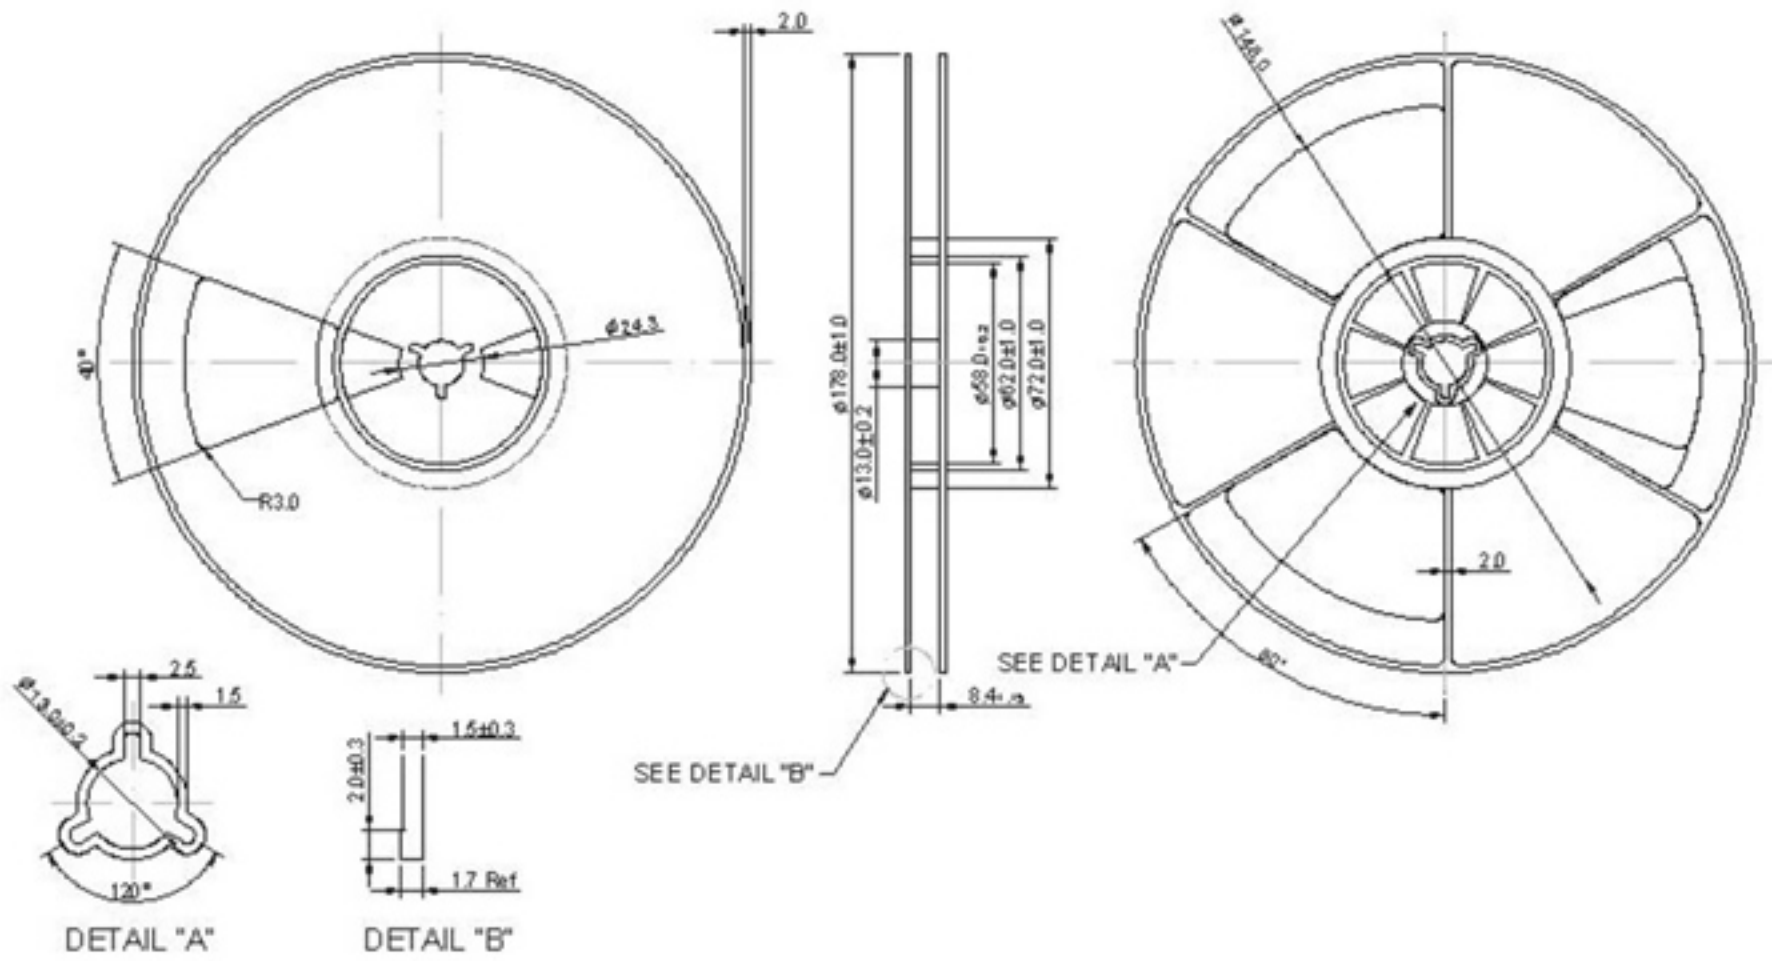

2. TAPE DIMENSION

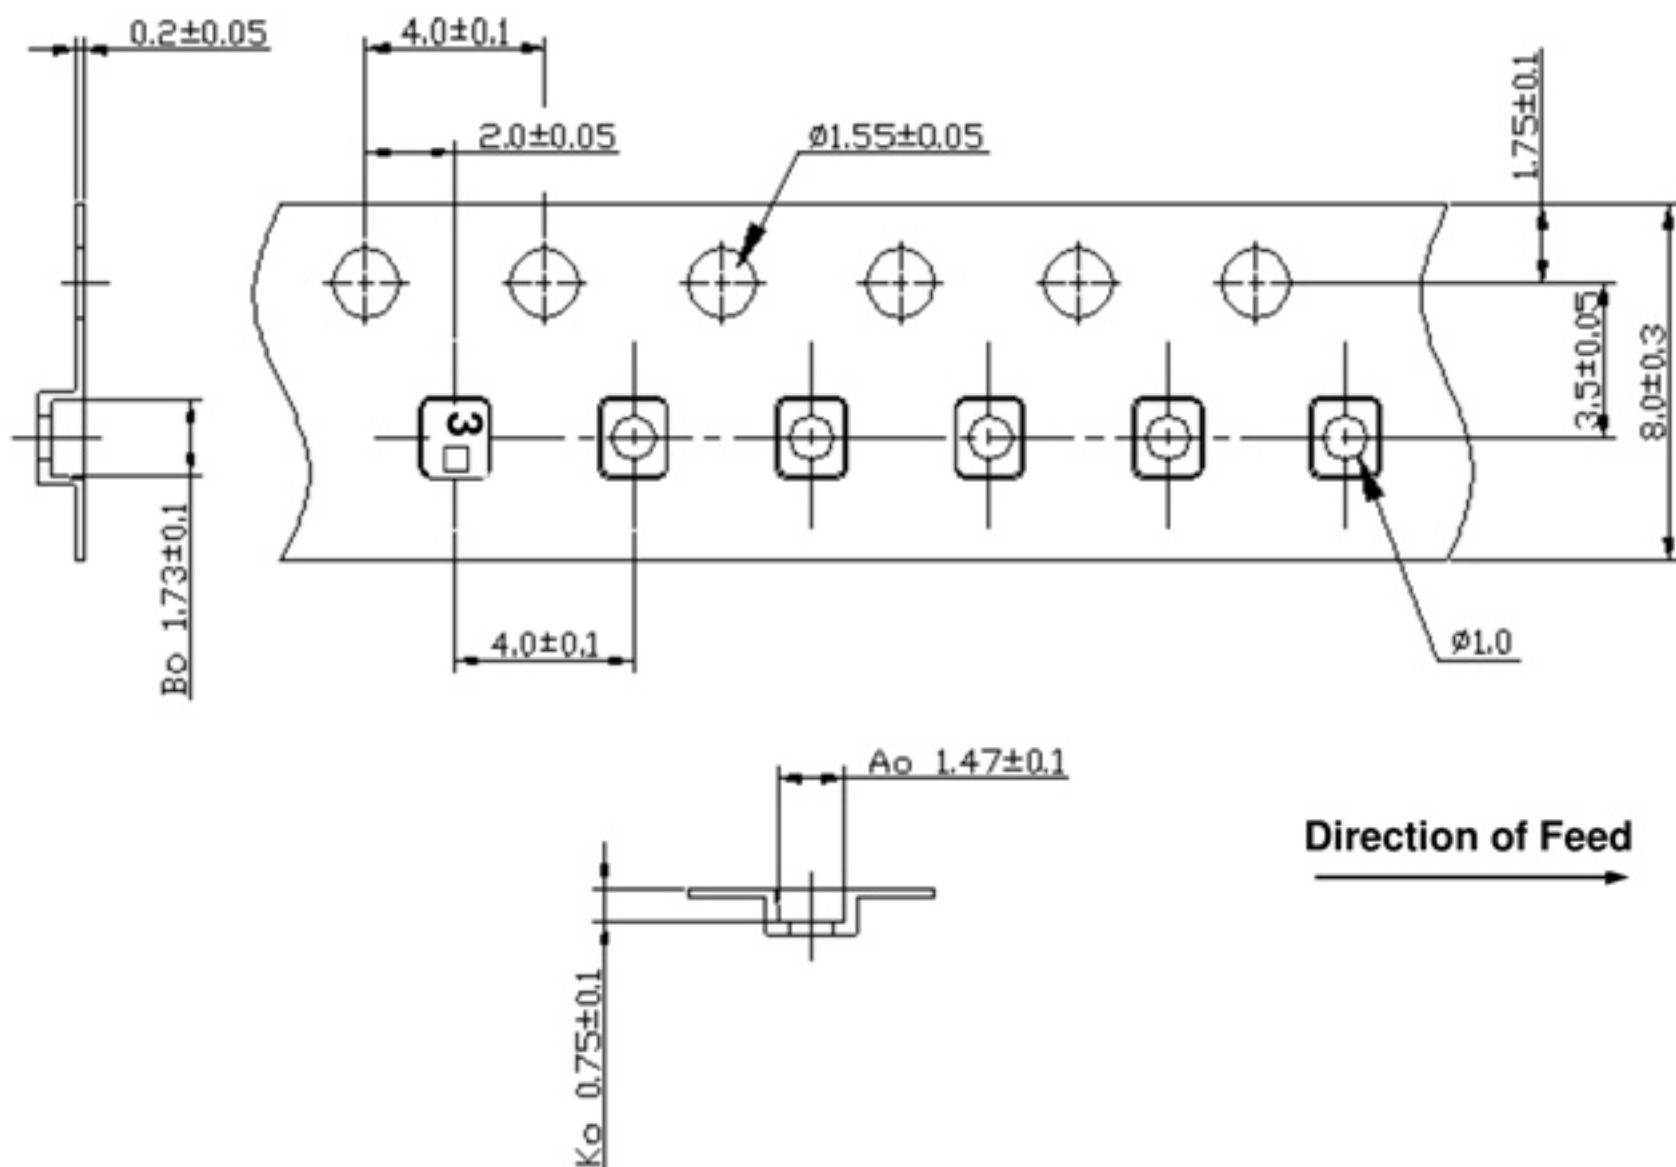

H. Recommended Reflow Profile:

1. Preheating shall be fixed at $150\sim 180^{\circ}\text{C}$ for $60\sim 90$ seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for $50\sim 80$ seconds and at $260^{\circ}\text{C} +0/-5^{\circ}\text{C}$ peak ($20\sim 40\text{sec}$).
4. Time: 2 times.

