


SAW Filter 1542.5 MHz

MODEL NO.:TA1045C

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40 °C to +85 °C
4. Storage Temperature: -40 °C to +85 °C
5. Moisture Sensitivity Level: Level 1 (MSL 1)

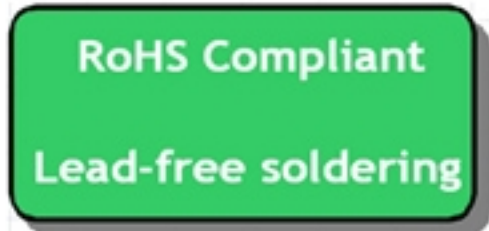

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Terminating source impedance (single ended) : $Z_s = 50 \Omega$

Terminating load impedance (single ended) : $Z_L = 50 \Omega$


Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	1542.5	-	-
Insertion Loss (1525 ~ 1560 MHz)	dB	-	3	4.3	-
Amplitude ripple (1525 ~ 1560 MHz)	dB	-	0.7	2.1	-
VSWR (1525 ~ 1560 MHz)		-	1.5	2.2	-
Attenuation (reference level from 0 dB)					
DC ~ 1480 MHz	dB	21	49	-	-
1630 ~ 1660 MHz	dB	26	44	-	-
1660 ~ 2050 MHz	dB	30	45	-	-
2050 ~ 3500 MHz	dB	25	44	-	-
Temperature Coefficient of Frequency	ppm/°C	-	-36	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

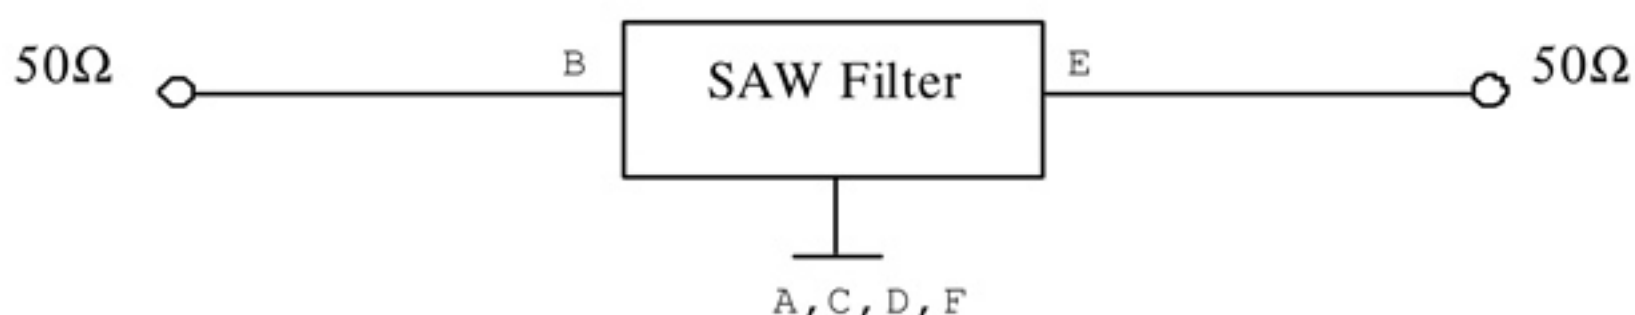

D.OUTLINE DRAWING:

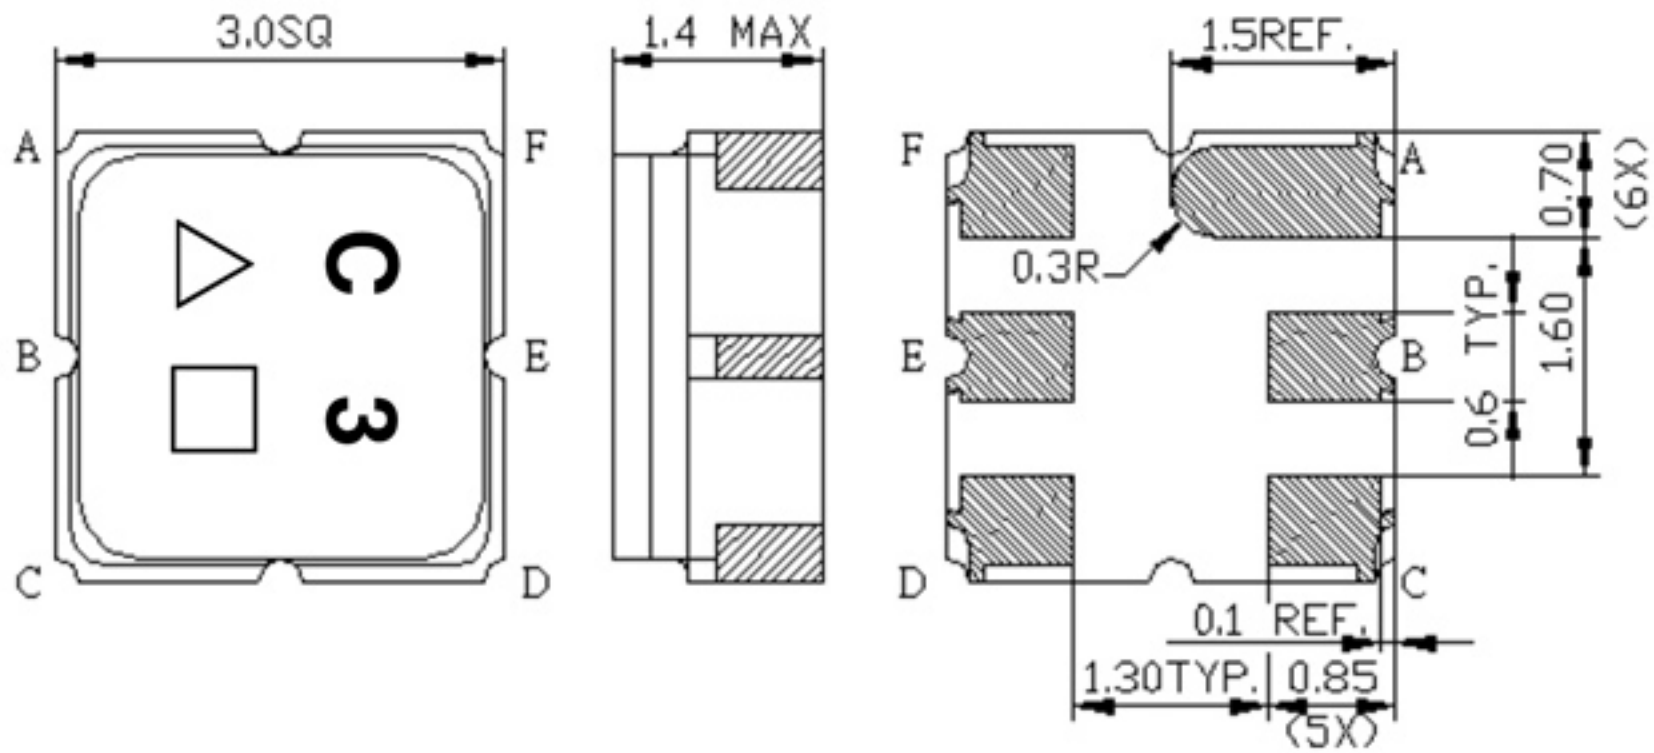


Not Specified Tolerance: +/-0.15mm
 B: Input
 E: Output
 A,C,D,F: Ground
 Unit: mm




△ : Year Code(2019→9,...2023→3,...,2029→9)
 □: Date Code(Follow the table from planner each year)

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

E. PCB Footprint:

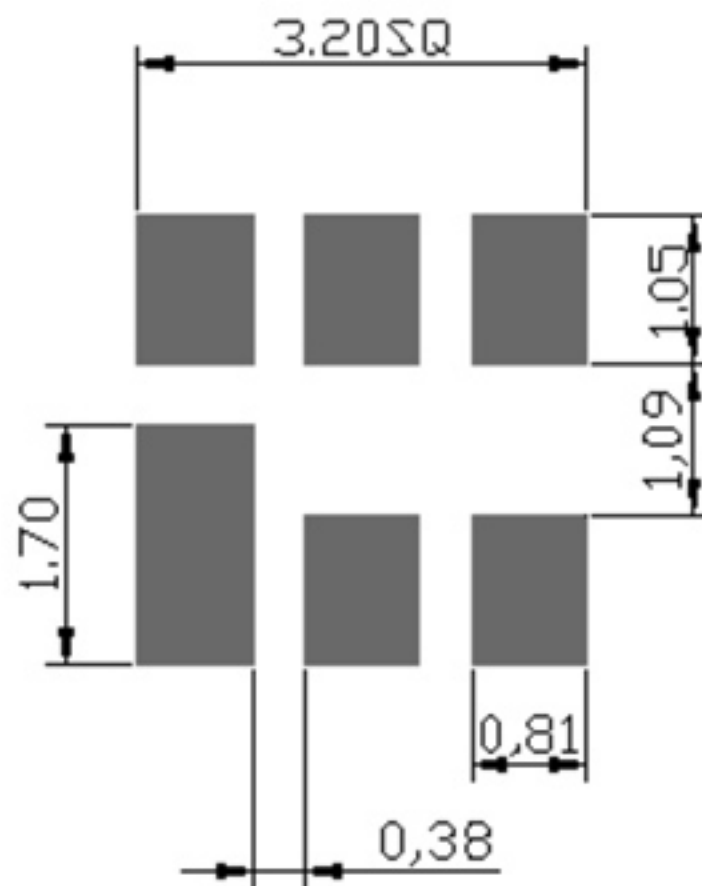


F. Frequency Characteristics :

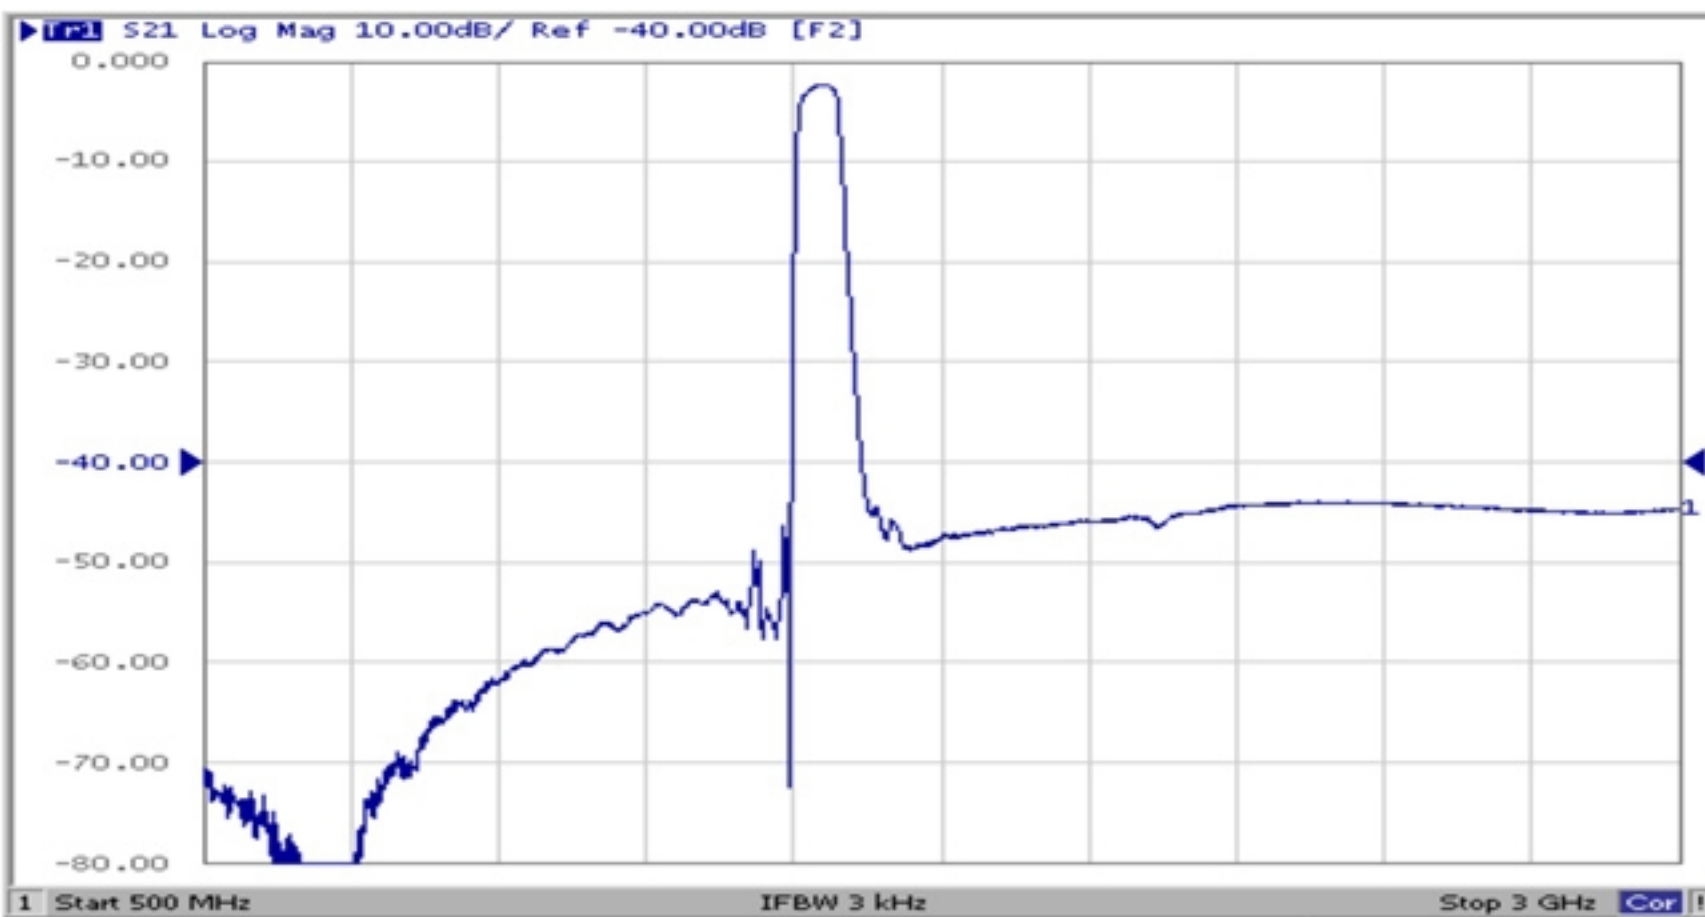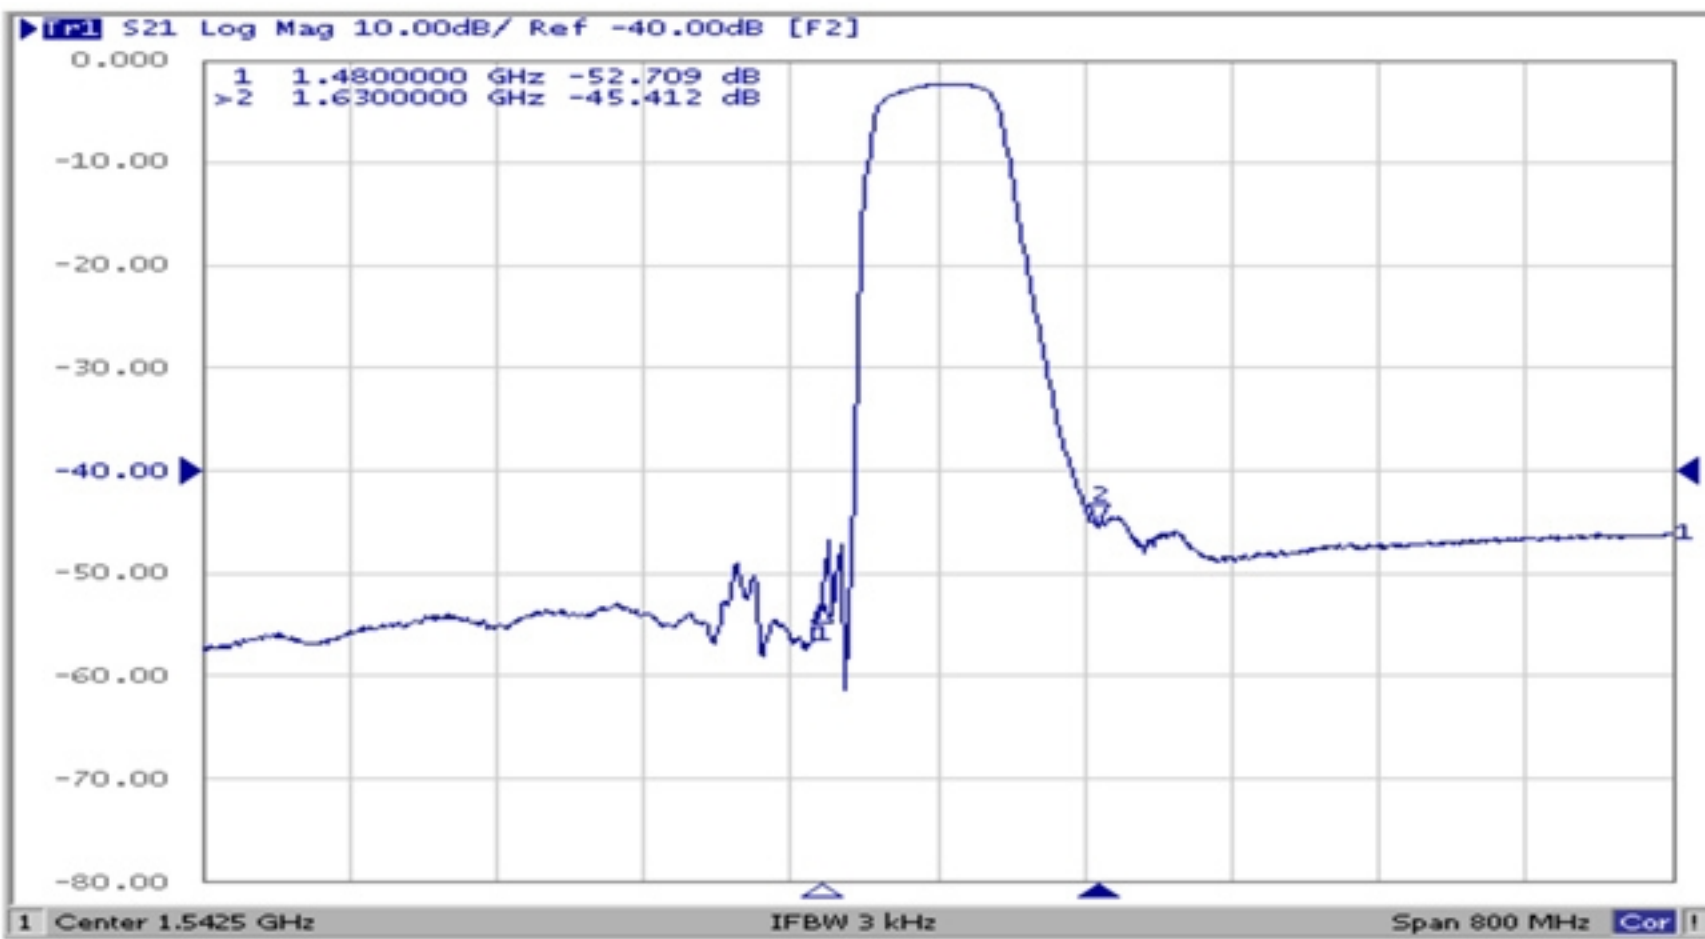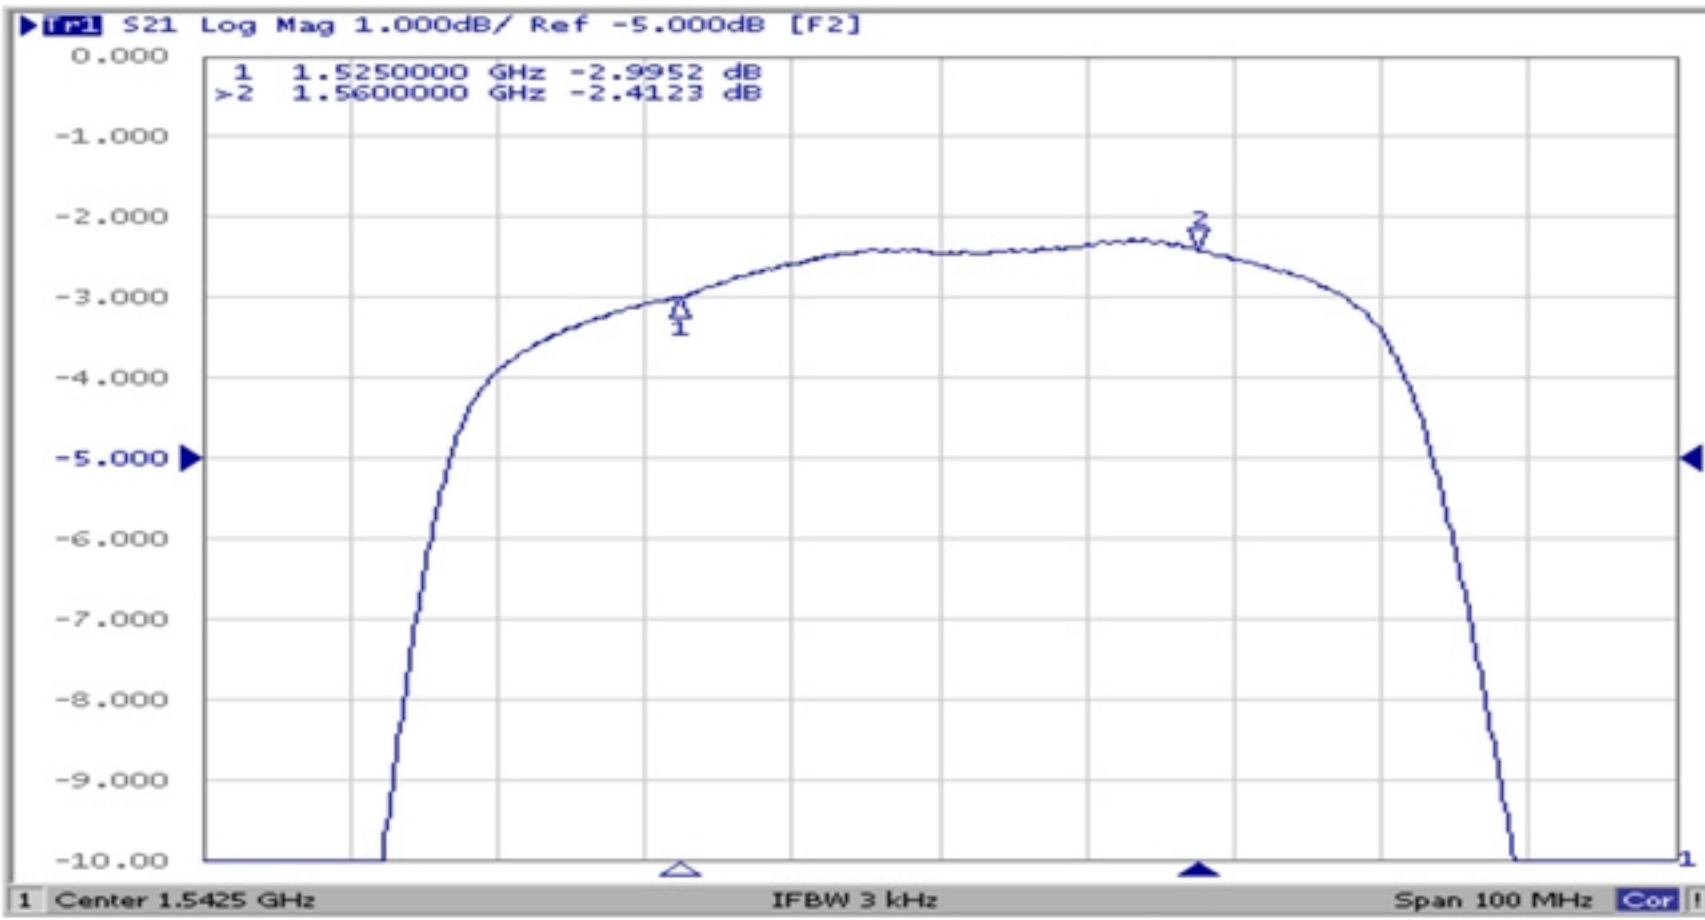


Reflection Functions :

S11

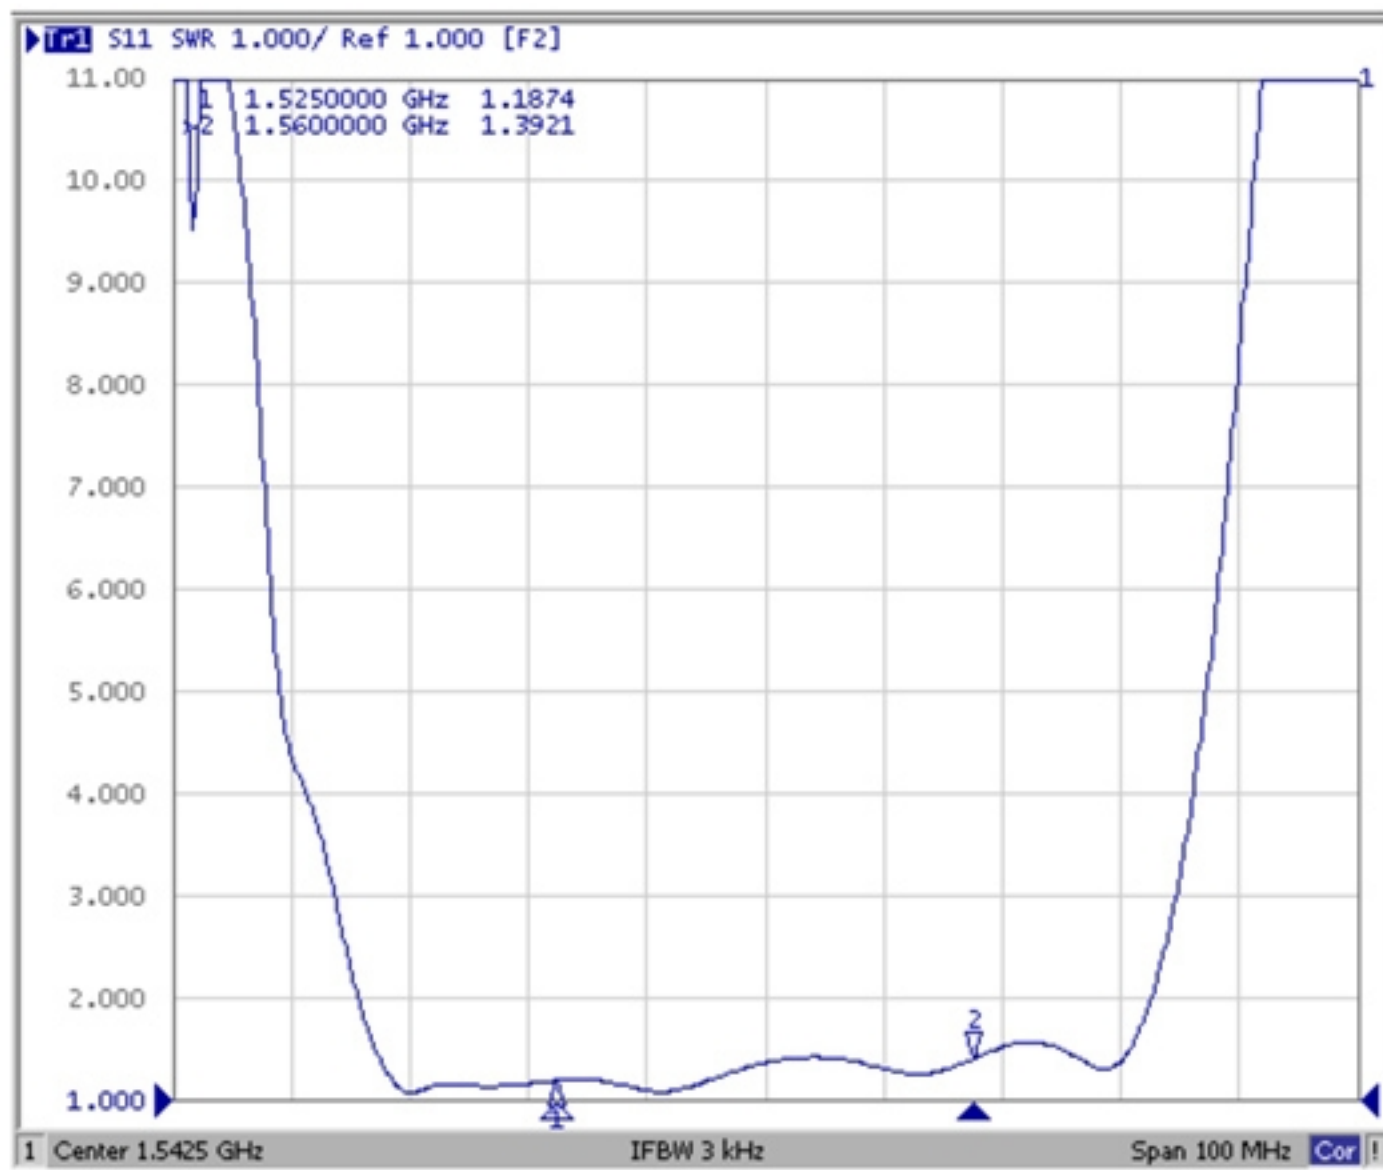


S22

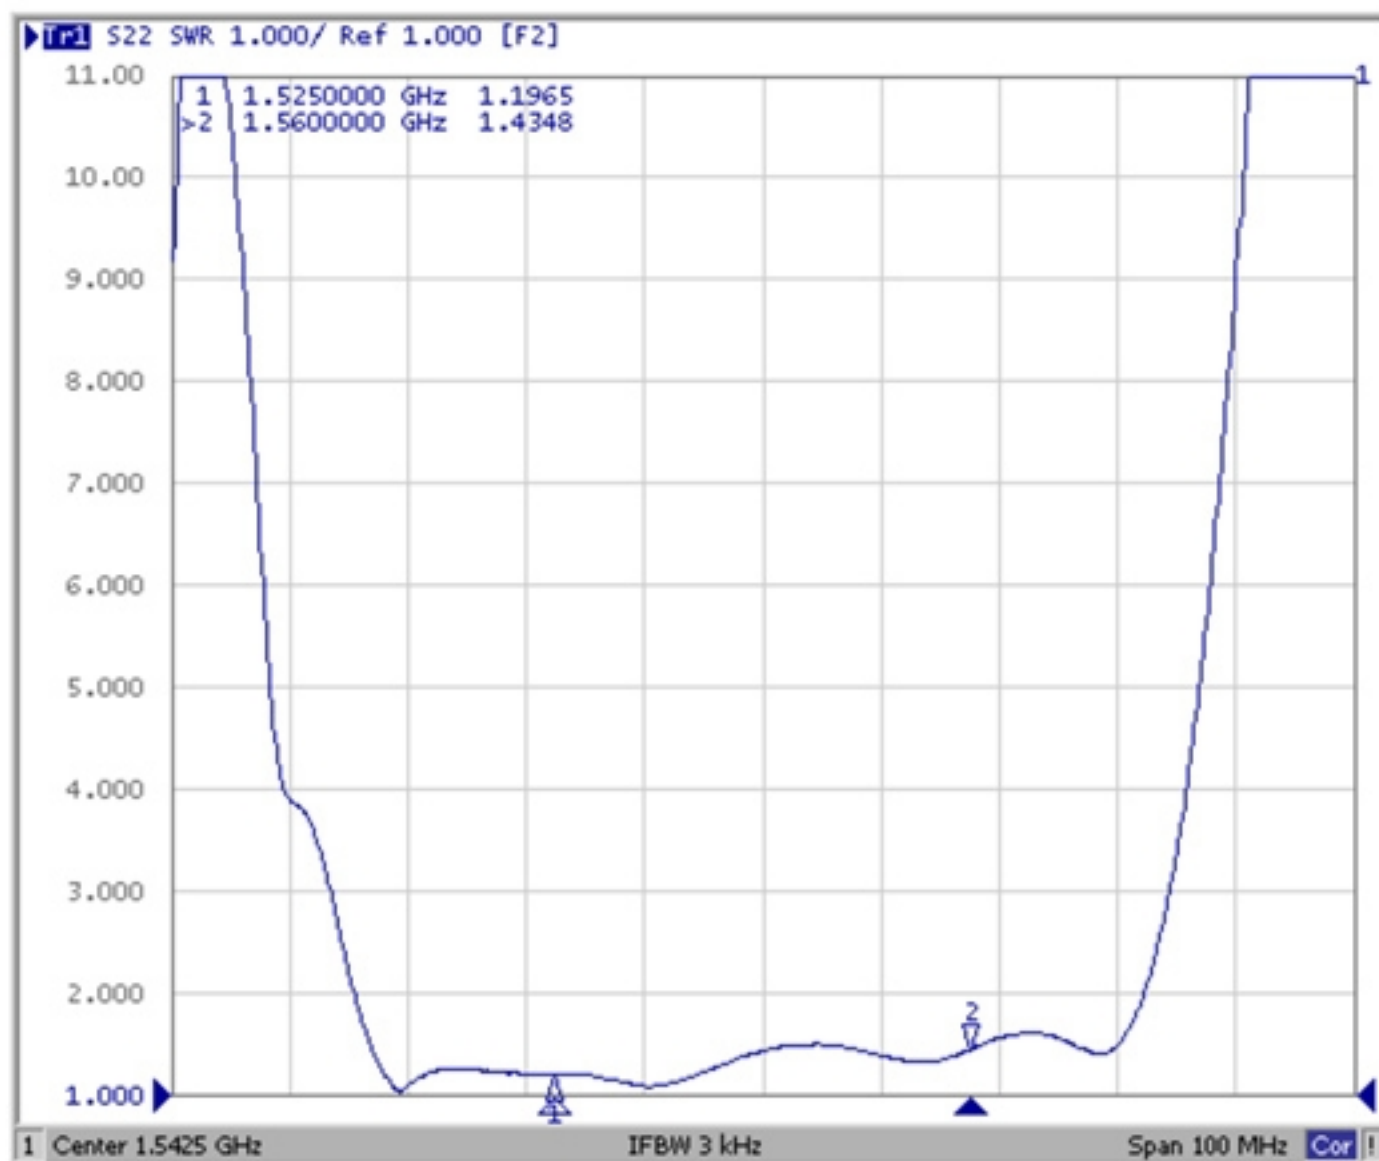


G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

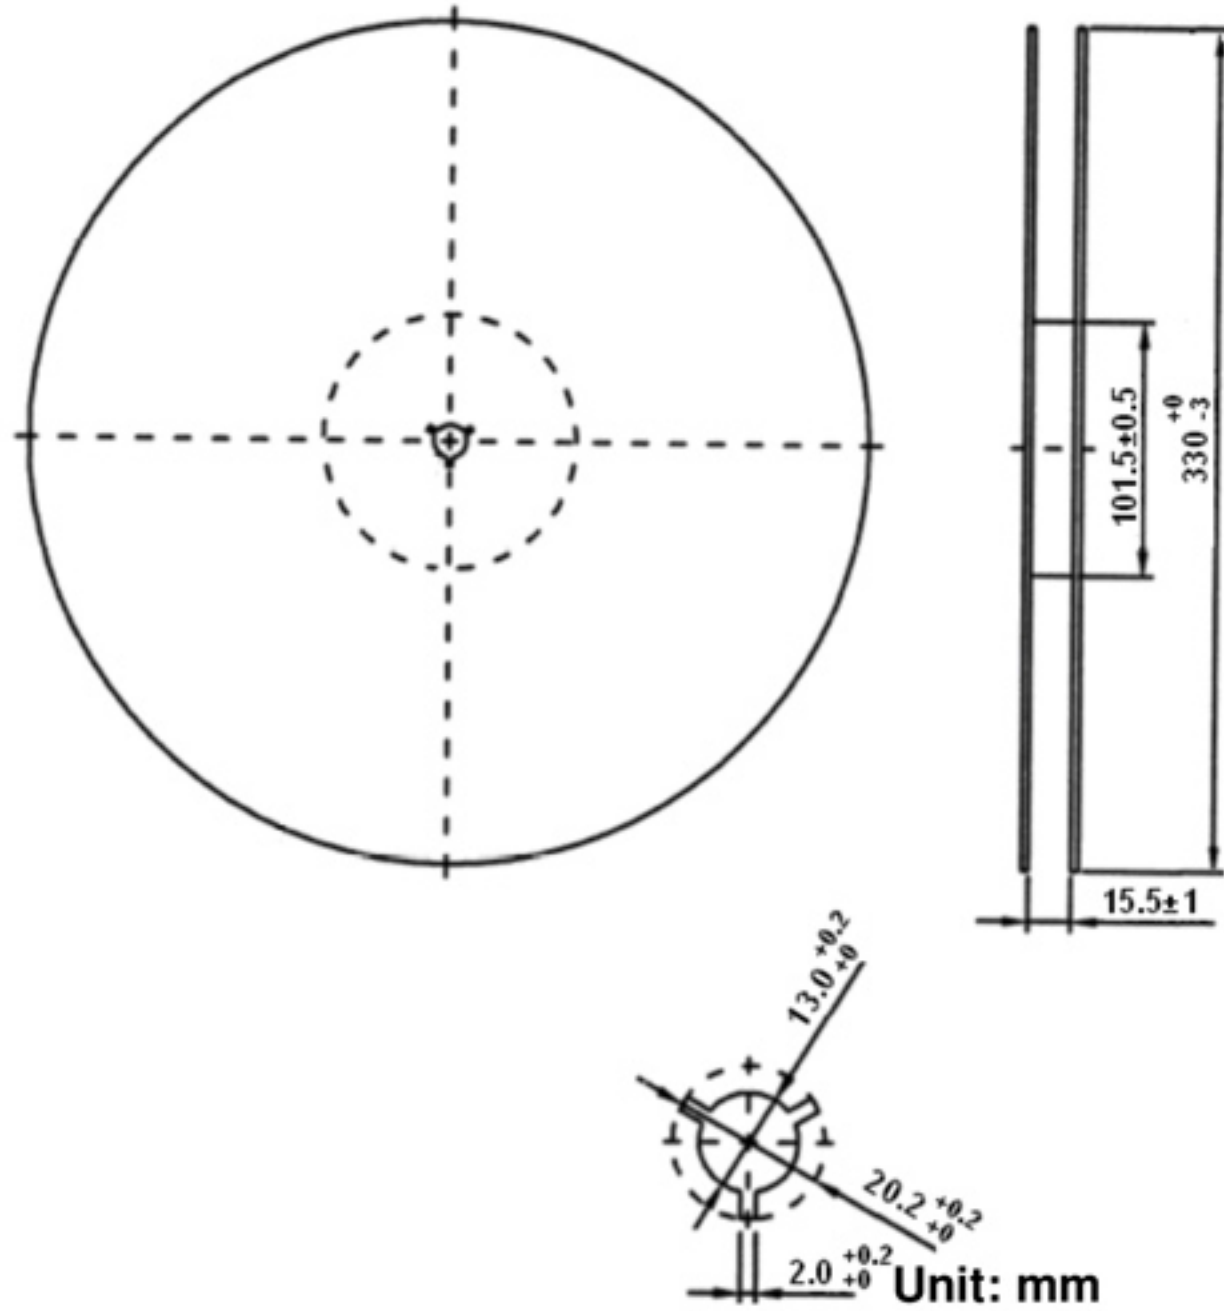

2. TAPE DIMENSION

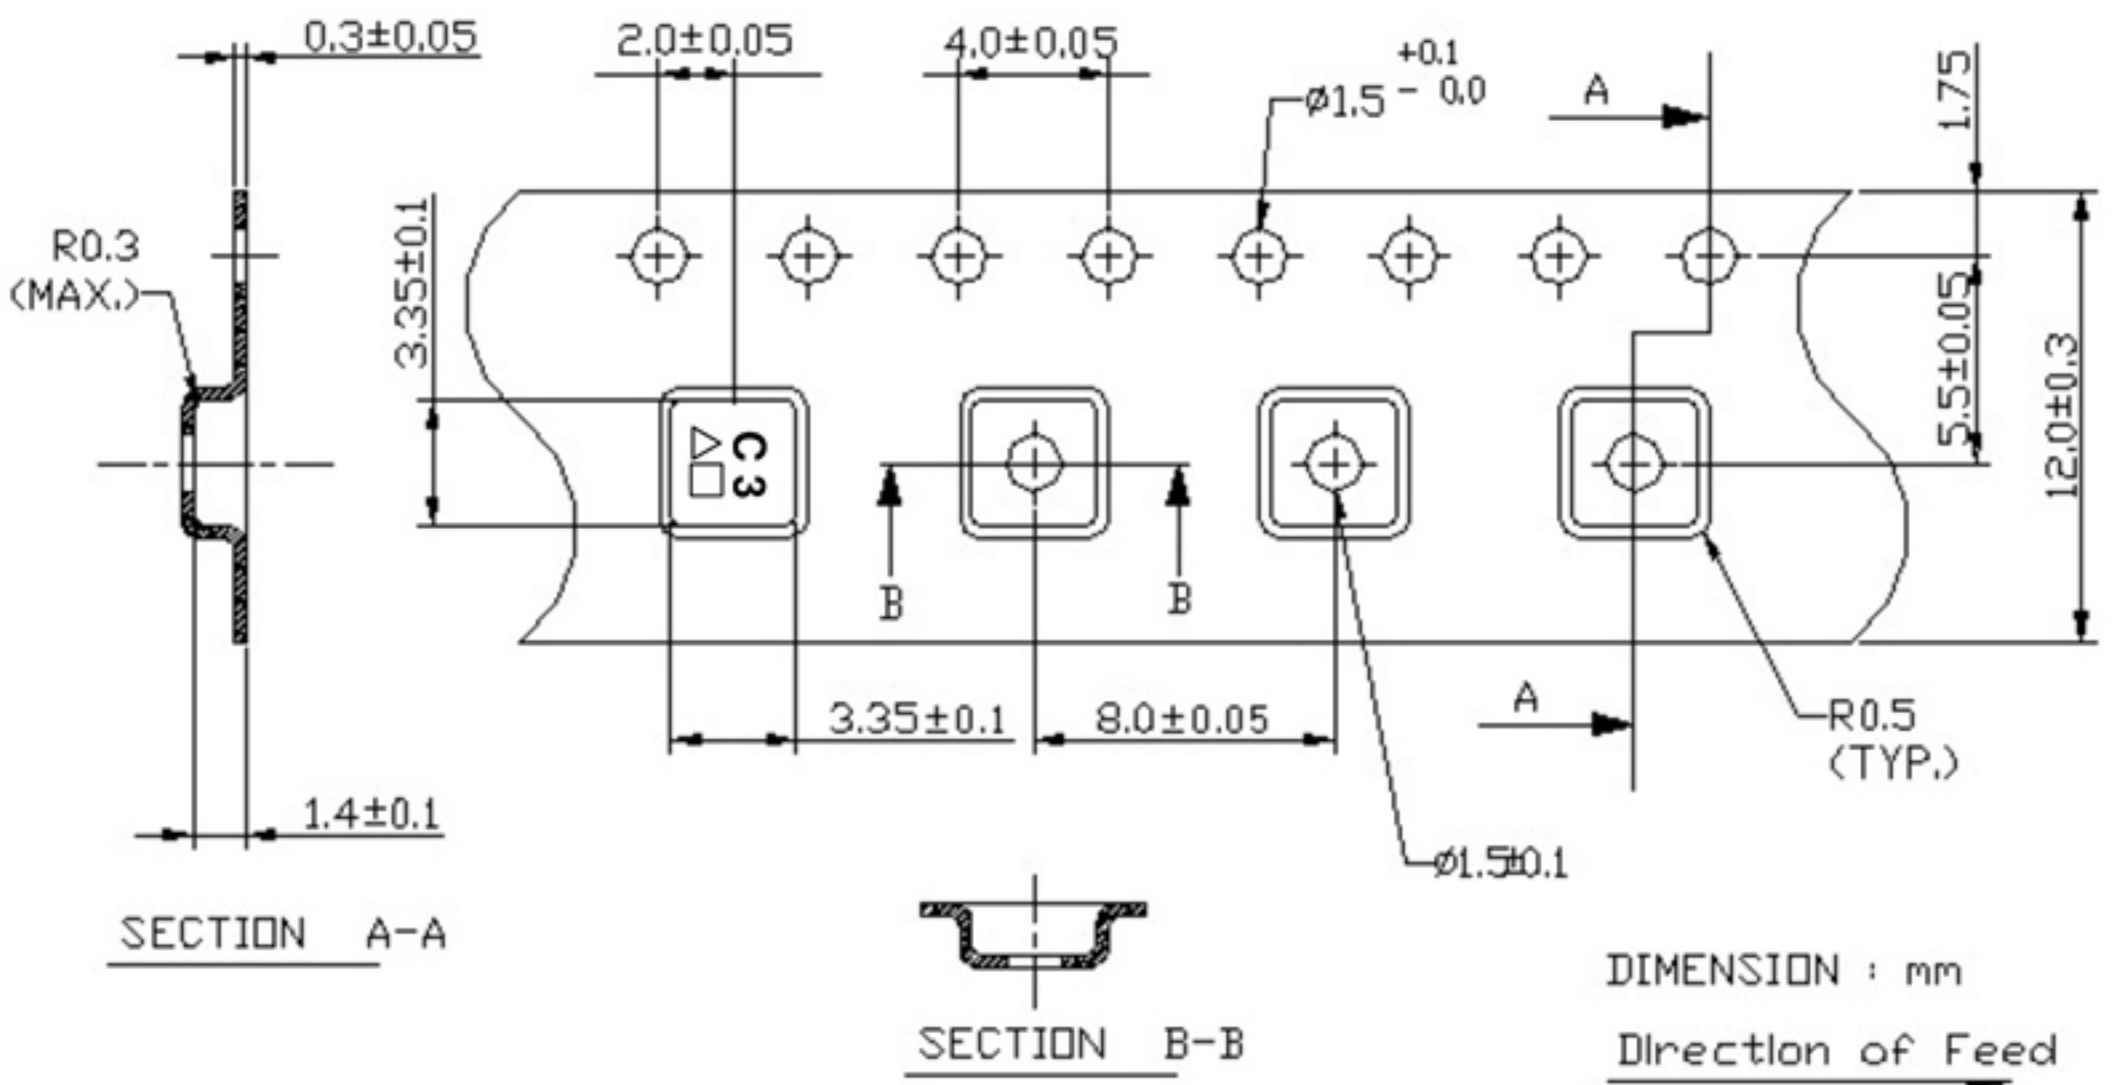

H. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time: 2 times.

